



Product Catalog
U.S Standard LV NEMA Motor
(Severe Duty, IEEE841, Explosion proof)



Table of Contents

Product Features

Pages	HD HYUNDAI Models	LV Motor Types
09	HES, HHI Model	NEMA Severe duty LV Motors
10	HSDE Model (Large motors)	NEMA Severe duty LV Motors
11	IEEE-HL Model	IEEE841 Severe duty LV Motors
12	IEEE-XL Model (Large motors)	IEEE841 Severe duty LV Motors
13	IXHHI Model	Explosion proof Severe duty LV Motors

Technical Performances

Pages	HD HYUNDAI Models	LV Motor Types
14	HES, HHI Model	Severe duty, Foot mounted
15	HSDE Model (Large motors)	Severe duty, Foot mounted
16	HES, HHI Model	Severe duty, C-Face, Foot mounted
17	HSDE Model (Large motors)	Severe duty, C-Face, Foot mounted
18	HES, HHI Model	Severe duty, D-Flange, Foot mounted
19	HES, HHI Model	Severe duty, C-Face, Footless
20	HES, HHI Model	Severe duty, D-Flange, Footless
21	HES, HHI Model	Severe duty, Vertical, C-Face, Footless
22	HES, HHI Model	Severe duty, Vertical, D-Flange, Footless
23	IEEE-HL Model	IEEE841, Foot mounted
24	IEEE-XL Model (Large motors)	IEEE841, Foot mounted
25	IEEE-HL Model	IEEE841, C-Face, Foot mounted
26	IEEE-XL Model (Large motors)	IEEE841, C-Face, Foot mounted
27	IEEE-HL Model	IEEE841, D-Flange, Foot mounted
28	IEEE-HL Model	IEEE841, C-Face, Footless
29	IEEE-HL Model	IEEE841, D-Flange, Footless
30	IEEE-HL Model	IEEE841, Vertical, C-Face, Footless
31	IEEE-HL Model	IEEE841, Vertical, D-Flange, Footless
32	IXHHI Model	Explosion proof, Foot mounted
33	IXHHI Model	Explosion proof, C-Face, Foot mounted

Dimensions & Outlines

Pages	HD HYUNDAI Models	LV Motor Types
34	HES Model	Severe duty, Foot mounted
35	HHI Model	Severe duty, Foot mounted
36	HSDE Model (Large motors)	Severe duty, Foot mounted
37	HES Model	Severe duty, C-Face, Foot mounted
38	HHI Model	Severe duty, C-Face, Foot mounted
39	HSDE Model (Large motors)	Severe duty, C-Face, Foot mounted
40	HES Model	Severe duty, D-Flange, Foot mounted
41	HHI Model	Severe duty, D-Flange, Foot mounted
42	HES Model	Severe duty, C-Face, Footless
43	HHI Model	Severe duty, C-Face, Footless
44	HES Model	Severe duty, D-Flange, Footless
45	HHI Model	Severe duty, D-Flange, Footless
46	HES Model	Severe duty, Vertical, C-Face, Footless
47	HHI Model	Severe duty, Vertical, C-Face, Footless
48	HES Model	Severe duty, Vertical, D-Flange, Footless
49	HHI Model	Severe duty, Vertical, D-Flange, Footless
50	IEEE-HL Model	IEEE841, Foot mounted
51	IEEE-XL Model (Large motors)	IEEE841, Foot mounted
52	IEEE-HL Model (Fr. 143 - 326)	IEEE841, C-Face, Foot mounted
53	IEEE-HL Model (Fr. 364 - 449)	IEEE841, C-Face, Foot mounted
54	IEEE-XL Model (Large motors)	IEEE841, C-Face, Foot mounted
55	IEEE-HL Model (Fr. 143 - 326)	IEEE841, D-Flange, Foot mounted
56	IEEE-HL Model (Fr. 364 - 449)	IEEE841, D-Flange, Foot mounted
57	IEEE-HL Model (Fr. 143 - 326)	IEEE841, C-Face, Footless
58	IEEE-HL Model (Fr. 364 - 449)	IEEE841, C-Face, Footless
59	IEEE-HL Model (Fr. 143 - 326)	IEEE841, D-Flange, Footless
60	IEEE-HL Model (Fr. 364 - 449)	IEEE841, D-Flange, Footless
61	IEEE-HL Model (Fr. 143 - 326)	IEEE841, Vertical, C-Face, Footless
62	IEEE-HL Model (Fr. 364 - 449)	IEEE841, Vertical, C-Face, Footless
63	IEEE-HL Model (Fr. 143 - 326)	IEEE841, Vertical, D-Flange, Footless
64	IEEE-HL Model (Fr. 364 - 449)	IEEE841, Vertical, D-Flange, Footless
65	IXHHI Model	Explosion proof, Foot mounted
66	IXHHI Model	Explosion proof, C-Face, Foot mounted

Products in Stock (Locations)

Pages	Offices	Warehouses
67	Houston, TX Atlanta, GA	Baytown, TX Duluth, GA Pewaukee, WI



HD HYUNDAI ELECTRIC


Provides our valued customers
with **HIGH QUALITY** electric motors
stocked in the **USA** at **FAIR PRICES**.

■ Please contact here

 LVmotor@heamerica.com  +1-678-789-1885



Official website

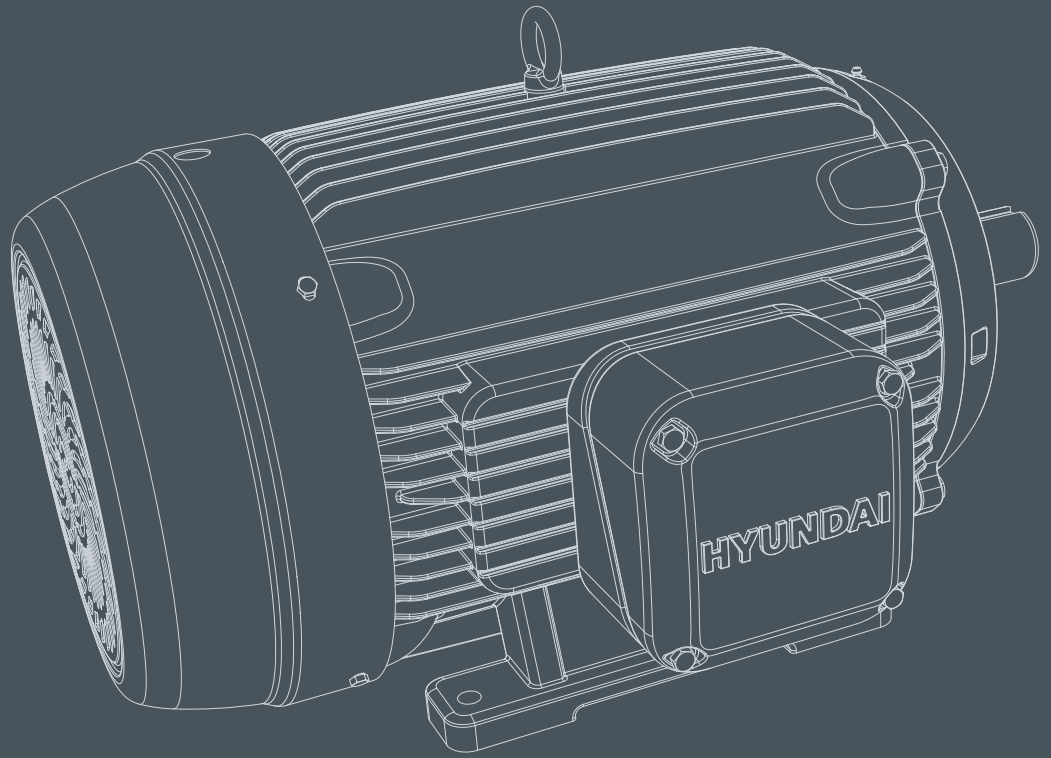

HD HYUNDAI ELECTRIC

Essential for Today Potential for Tomorrow

As one of the affiliates of the HD HYUNDAI Group, HD Hyundai Electric is a company established through the spin-off of the Electric and Electronic Business Division of Hyundai Heavy Industry in April 2017.

Electrical Equipment business was launched in 1977 at the Heavy Electric System Business Division of Hyundai Heavy Industry; it has been the leader in general electric & electronic systems and energy solutions in Korea for the past 47 years.

Our talented minds have used their creativity and drive as a weapon to turn the impossible into the possible and pioneer a new technological paradigm. In addition, our talented minds have used their creativity and drive as a weapon to turn the impossible into the possible and pioneer a new technological paradigm.

Thanks to the 'Hyundai Spirit', comprising of the unique experience, know-how, and sheer determination of our talented minds, it is with great hope and joy that we launch Hyundai Electric. HD Hyundai Electric is committed to growing our customers' businesses and to growing with them.

To this end, we will provide the highest quality products, solutions, and services to increase our customers' productivity and efficiency. Valued customers follow us as HD Hyundai Electric becomes the nation's leading energy solutions provider.


Overview

ELECTRIC MOTOR

The electric motor is an electric system that converts electric energy into mechanical energy by making use of electromagnetic energy to supply rotational force.

Electric motors drive pumps, fans, compressors & general applications at every industrial facility with electric power supplied through transformer and distribution systems.

Structural stability is the prominent requirement when considering product characteristics and modification of the apparent shape is limited due to specified dimensions, distance and thickness.

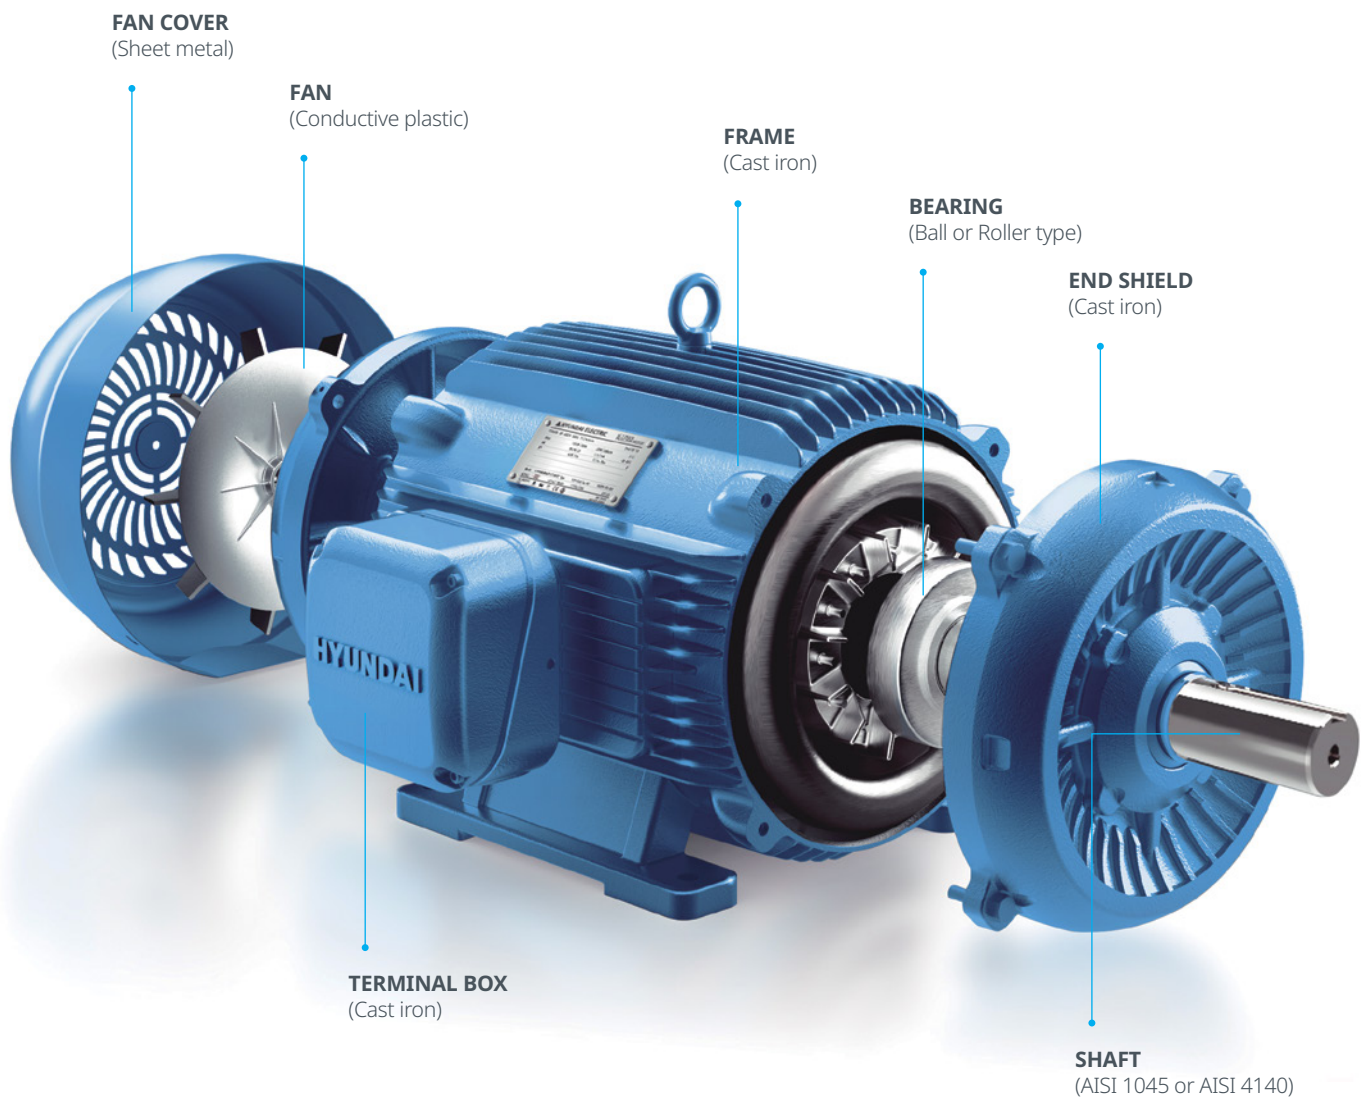


HD HYUNDAI ELECTRIC

NEMA Severe duty Low Voltage Induction Motors



Continuous design evolutions for Electric Motor developed through years of experience, innovation and reliability in building top quality

Our state-of-the-art manufacturing facilities guarantee that all products meet customers' requirements with regard to cost, delivery and quality

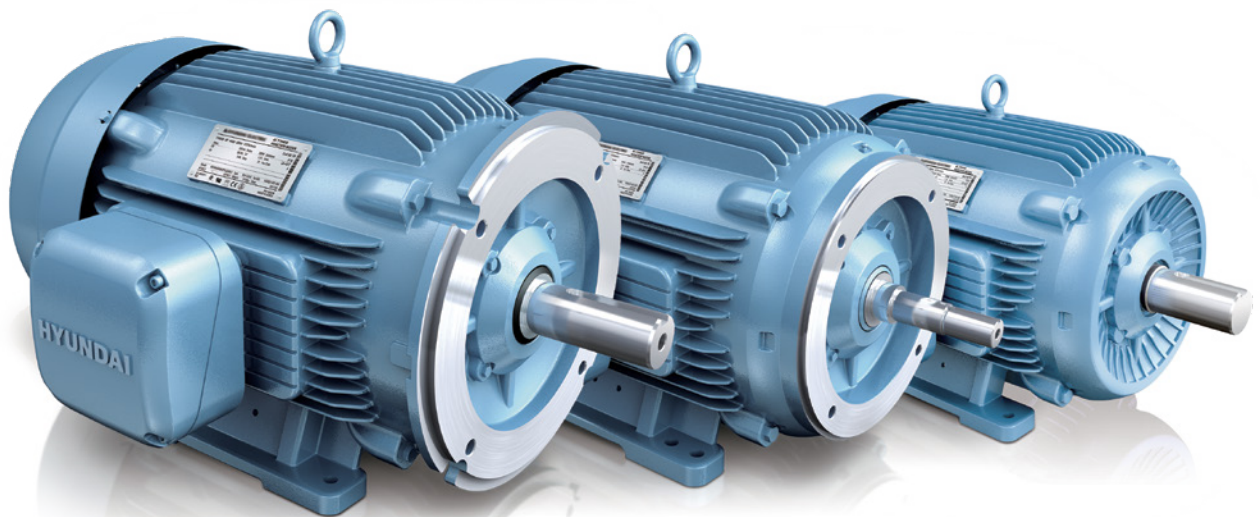

Features

- Motor maintenance optimization
- Premium efficiency, Low temperature rise
- High Lifetime
- Top skilled electrical & mechanical performances



IEEE45
MARINE DUTY

Product Line-up

Severe duty series for NEMA Standard
Make-to-order(MTO) manufacturing for IEC Standard

NEMA Standard Motor

Type	Product Family	HP	RPM	Frame	Suffix
Severe Duty	HES	1 - 50	12/18/36	140 - 326	BB : Ball Bearing
	HHI	60 - 250	12/18/36	360 - 449	IB : Insulation Bearing on N-DE
	HSDE	300 - 900	12/18/36	L449 - 580	2IB : Insulation Bearing on DE & N-DE
IEEE841	IEEE	1 - 50	12/18/36	140 - 326	BR : Bearing RTDs (1 EA/Bearing) with Auxiliary Terminal Box
	IEEE	60 - 250	12/18/36	360 - 449	SR : Stator RTDs (2 EA/Ph.) with Auxiliary Terminal Box
	IEEE	300 - 900	12/18/36	L449 - 580	SH : Space Heater (1 Set/Motor) with Auxiliary Terminal Box
Explosion Proof	IXHHI	1 - 50	12/18/36	140 - 326	SP : Spare part (Cooling Fan)
	IXHHI	60 - 250	12/18/36	360 - 449	LL : Long Lead Cable
					F : Temp. rise-F


Warranty

We guarantees the warranty period of all products based on world-class quality, performance, and reliability.

NEMA Standard Model	Warranty Period
Severe Duty Series	3 Years from Date of shipment
Explosion Proof Series	3 Years from Date of shipment
IEEE841 Series	5 Years from Date of shipment

HD Hyundai Electric Aims

We provide our valued customers with HIGH QUALITY electric motors stocked in ths USA at FAIR PRICES.



Severe Duty - HES, HHI Model Premium Efficiency



Product Electrical Features

HYUNDAI Product Type	HES Model HHI Model	Fr. 143 - 326 Fr. 364 - 449
Common	Motor power (HP)	1 HP - 250 HP
	Speed (RPM)	3600, 1800 or 1200
	Frequency	60 Hz
	Altitude	3,300 ft.
	Ambient temp.	40 °C
	Enclosure	Totally Enclosed (Protection : IP55)
	Method of Cooling	IC411 (FC)
	Efficiency	NEMA Premium
	Duty	Continuous (S1)
	Design	NEMA Design B Torque
Voltage	Insulation Class	F (Impregnation Resin & Magnet wire : Class H) Inverter duty, Exceeds NEMA MG-1 Part 31
	230/460 V	1 HP - 125 HP
	380 V, 400 V, 415 V	1 HP - 250 HP at 50 Hz
	460 V	150 HP - 250 HP
Temp. rise	575 V	1 HP - 250 HP
	Sine Wave Power	B
Service Factor	VFD Power	F
	Sine Wave Power	1.15
Inverter duty	VFD Power	1.0
	Temp. rise F & Non-hazardous	1.25 (Up to Fr. 143 - 365)
	Variable Torque 6 - 60 Hz	Applicable
	Variable Torque 3 - 60 Hz	Applicable at 50 % Load
	Constant Torque 6 - 60 Hz	Applicable
	Constant HP	CHP up to 1.5 times base speed

Product Mechanical Features

Mounting	Foot mount (B3)	Foot drilled hole(s)
	C-face with Foot (B35)	Applicable
	D-flange with Foot (B35)	Applicable
	C-face without Foot (B5, V1)	Applicable
	D-flange without Foot (B5, V1)	Applicable
Material	Frame	Cast-iron
	Rotor	Aluminum die casting
	End-shield	Cast-iron
	Fan	Non-sparking conductive plastic fan
Rotation	Fan cover	Steel
	Bi-directional	Applied
Bearing	Drive end	Ball or Roller I Regreasable (Fr. 324 - 449)
	Non-Drive end	Ball I Regreasable (Fr. 324 - 449)
	Protection	V-seal
	Inner Bearing Cap	Applied I Fr. 364 - 449
Shaft	Lubrication	Polyurea (Polyrex EM grease)
	Material	AISI 1045
	DE threaded hole	Applied
	DE Keyway	Opened keyway
Terminal box	Shaft locking device	Frames with Roller bearing (To prevent Bearing brinelling)
	Material	Cast-iron
Lead cable	Mounting (F1 or F2)	F1 to F2 conversion available
	Cable hole plug	Plastic
Drain Plug	Number of lead wire(s)	9 lead(s) I Fr. 143 - 215
	Number of lead wire(s)	12 lead(s) I Fr. 254 - 365
Tap provision	Number of lead wire(s)	6 lead(s) I Fr. 404 - 449
	Frame	Both sides of frame bottom
Certification	Main Terminal Box	None
	Grease outlet	Fr. 324 - 449
	For Vib. Sensor	Fr. 364 - 449
Name plate	For B.T.D	Fr. 364 - 449
	CSA	Class I, Division 2 Class II, Division 2 Groups A, B, C & D *** Note (1) Groups E, F & G *** Note (2)
	DOE	CSA C-390 Premium Efficiency
	CE	Certi. #CC0038A Department of Energy Efficiency
	IEEE45	EN 60034-1 CE Declaration of Conformity
Painting	UL	ABS Product Type Approval Marine Duty
	Markings	#E211828
Common	Material	RU, CSA, CC(DOE), CE, IEEE45
	Type	Stainless Steel AISI304
Warranty	Color	Polyurethane top coat
	Lifting device	Munsell 4.0PB5.4/5.5
	Eye bolt(s)	3 Years from Date of shipment

※ Notes (1)


1) Temp. code at Sine Wave Power : T3C (Fr. 143 - 326)
T3B (Fr. 364 - 405)
T3A (Fr. 444 - 449)

2) Temp. code at VFD Power : T3 (Fr. 143 - 449)

※ Notes (2)

1) Group E : Fr. 143 - 326
2) Group F&G : Fr. 143 - 449

Severe Duty - HSDE Model (Large motors) Premium Efficiency



Product Electrical Features

HYUNDAI Product Type	HSDE Model	Fr. L449 - 5812
Common	Motor power (HP)	250 HP - 900 HP
	Speed (RPM)	3600, 1800 or 1200
	Frequency	60 Hz
	Altitude	3,300 ft.
	Ambient temp.	40 °C
	Enclosure	Totally Enclosed (Protection : IP55)
	Method of Cooling	IC411 (FC)
	Efficiency	NEMA Premium
	Duty	Continuous (S1)
	Design	NEMA Design B Torque
Voltage	Insulation Class	F (Impregnation Resin & Magnet wire : Class H) Inverter duty, Exceeds NEMA MG-1 Part 31
	380 V, 400 V, 415 V	Applicable at 50 Hz
	460 V	Applicable
Temp. rise	575 V	Applicable
	Sine Wave Power	B
Service Factor	VFD Power	F
	Sine Wave Power	1.15
Inverter duty	VFD Power	1.0
	Variable Torque 6 - 60 Hz	Applicable
	Variable Torque 3 - 60 Hz	Fr. L449 - 5011 at 50 % Load
	Constant Torque 6 - 60 Hz	Fr. L449 - 5011
	Constant Torque 30 - 60 Hz	Fr. 5812
	Constant HP	Fr. L449 - 5011

Product Mechanical Features

Mounting	Foot mount (B3)		Foot drilled hole(s)
	C-face with Foot (B35)		Applicable
	D-flange with Foot (B35)		Applicable
	C-face without Foot (V1)		Applicable
	D-flange without Foot (V1)		Applicable
Material	Frame		Cast-iron
	Rotor		Aluminum die casting or Centrifugal cast aluminum
	End-shield		Cast-iron
	Fan		Non-sparking conductive plastic fan
	Fan cover		Steel
Rotation	BI-directional		Fr. L449 - 5812 at 1800, 1200 RPM
	Uni-directional		Fr. L449 - 5812 at 3600 RPM
	Drive end		Ball or Roller I Regreasable
Bearing	Non-Drive end		Ball or Insulation I Regreasable
	Protection	Labyrinth seal	Fr. L449 - 5812 at 3600 RPM
		V-seal	Fr. L449 - 5812 at 1800, 1200 RPM
	Inner Bearing Cap		Applied
	Lubrication		Polyurea (Polyrex EM grease)
Shaft	Material	AISI 1045	Fr. L449 at 3600 RPM
		AISI 4140	Fr. L449 - 5812 at 1800, 1200 RPM
	DE threaded hole		Applied
	DE Keyway		Opened keyway
Terminal box	Shaft locking device		Frames with Roller bearing (To prevent Bearing brinelling)
	Material	Cast-iron	Fr. L449 - 5011
		Fabricated Steel	Fr. 5811/12
	Mounting	Cast-iron	F1 or F2
		Fabricated Steel	F1 or F2
Lead cable	Cable hole plug		Plastic
	Number of lead wire(s)		6 Lead(s)
	W.T.D (PT 100 Ohm)		2 EA / phase
Accessories	B.T.D (PT 100 Ohm)		1 EA / Bearing
	Space Heater		1 EA / Motor
	Auxiliary Terminal box		2 EA / Motor
Drain Plug	Frame		Both sides of frame bottom
	Main Terminal Box		None
	Grease outlet		Applied
Tap provision	For Vib. Sensor		Applied
	For B.T.D		Applied
Certification	CSA	Class I, Division 2	Groups A, B, C & D *** Note (1)
		Class II, Division 2	Groups E, F & G *** Note (2)
		CSA C-390	Premium Efficiency (Up to 500 HP)
	DOE	Certi. #CC0038A	Department of Energy Efficiency
	CE	EN 60034-1	CE Declaration of Conformity
Name plate	IEEE45	ABS Product Type Approval	Marine Duty (Up to 600 HP / Fr. L449 - 5011)
	Markings		CSA, CC(DOE), CE
Painting	Material		Stainless Steel AISI304
	Type		Polyurethane top coat
	Color		Munsell 4.0PB5,4/5.5
Common	Lifting device		Eye bolt(s)
	Warranty		3 Years from Date of shipment

※ Notes (1)

1) Temp. code at Sine Wave Power : T3 (Fr. L449 - 5011)

T3A (Fr. 5812)

2) Temp. code at VFD Power : T3 (Fr. L449 - 5011)

※ Notes (2)

1) Group F&G : Fr. L449 - 5011

IEEE841 - HL Model Premium Efficiency



Product Electrical Features

HYUNDAI Product Type	IEEE841 - HL Model	Fr. 143 - 449
Common	Motor power (HP)	1 HP - 250 HP
	Speed (RPM)	3600, 1800 or 1200
	Frequency	60 Hz
	Altitude	3,300 ft.
	Ambient temp.	40 °C
	Enclosure	Totally Enclosed (Protection : IP55)
	Method of Cooling	IC411 (FC)
	Efficiency	NEMA Premium
	Duty	Continuous (S1)
	Design	NEMA Design B Torque
Voltage	Insulation Class	F (Impregnation Resin & Magnet wire : Class H)
		Inverter duty, Exceeds NEMA MG-1 Part 31
Temp. rise	380 V, 400 V, 415 V	Applicable at 50 Hz
	460 V	Applicable
	575 V	Applicable
Service Factor	Sine Wave Power	B
	VFD Power	F
	Sine Wave Power	1.15
Inverter duty	VFD Power	1.0
	Temp. rise F & Non-hazardous	1.25 (Up to Fr. 143 - 365)
	Variable Torque 6 - 60 Hz	Applicable
	Variable Torque 3 - 60 Hz	Applicable at 50 % Load
	Constant Torque 6 - 60 Hz	Applicable
	Constant HP	CHP up to 1.5 times base speed

Product Mechanical Features

Mounting	Foot mount (B3)		Foot drilled hole(s)
	C-face with Foot (B35)		Applicable
	D-flange with Foot (B35)		Applicable
	C-face without Foot (B5, V1)		Applicable
	D-flange without Foot (B5, V1)		Applicable (Except V1 for Fr. 143 - 145)
Material	Frame		Cast-iron
	Rotor		Aluminum die casting
	End-shield		Cast-iron
	Fan		Non-sparking conductive plastic fan
Rotation	Fan cover		Cast iron
	Bi-directional		Applicable
Bearing	Drive end		Ball or Roller I Regreasable
	Non-Drive end		Ball I Regreasable
	Protection		ProTech seal
	Inner Bearing Cap		Applied
Shaft	Lubrication		Polyurea (Polyrex EM grease)
	Material		AISI 1045
	DE threaded hole		Applied
	DE Keyway		Opened keyway
Terminal box	Shaft locking device		Frames with Roller bearing (To prevent Bearing brinelling)
	Material		Cast-iron
	Mounting (F1 or F2)		F1 to F2 conversion available
Lead cable	Cable hole plug		Plastic
	Number of lead wire(s)		3 lead(s) I Fr. 143 - 215
Drain Plug	Number of lead wire(s)		6 lead(s) I Fr. 254 - 449
	Frame		Both sides of frame bottom
Tap provision	Main Terminal Box		None
	Grease outlet		Fr. 364 - 449
	For Vib. Sensor		Fr. 364 - 449
Certification	For B.T.D		Fr. 364 - 449
	CSA	Class I, Division 2	Groups A, B, C & D *** Note (1)
		Class II, Division 2	Groups E, F & G *** Note (2)
		CSA C-390	Premium Efficiency
	DOE	Certi. #CC0038A	Department of Energy Efficiency
	CE	EN 60034-1	CE Declaration of Conformity
Name plate	IEEE45		Marine Duty IEEE45
	UL		#E211828
	Ordinary location		
Painting	Markings		RU, CSA, CC(DOE), CE, IEEE45
	Material		Stainless Steel AISI304
Common	Type		Epoxy Zinc with Polyurethane top coat
	Color		Munsell 7.5BG6/1.5
	Lifting device		Eye bolt(s)
	Warranty		5 Years from Date of shipment

※ Notes (1)

- 1) Temp. code at Sine Wave Power : T3C (Fr. 143 - 326)
T3B (Fr. 364 - 405)
T3A (Fr. 444 - 449)

- 2) Temp. code at VFD Power : T3 (Fr. 143 - 449)

※ Notes (2)

- 1) Group E : Fr. 143 - 326
2) Group F&G : Fr. 143 - 449

IEEE841 - XL Model (Large motor) Premium Efficiency



Product Electrical Features

HYUNDAI Product Type	IEEE841 - XL Model	Fr. L449 - 5812
Common	Motor power (HP)	250 HP - 900 HP
	Speed (RPM)	3600, 1800 or 1200
	Frequency	60 Hz
	Altitude	3,300 ft.
	Ambient temp.	40 °C
	Enclosure	Totally Enclosed (Protection : IP55)
	Method of Cooling	IC411 (FC)
	Efficiency	NEMA Premium
	Duty	Continuous (S1)
	Design	NEMA Design B Torque
Voltage	Insulation Class	F (Impregnation Resin & Magnet wire : Class H)
		Inverter duty, Exceeds NEMA MG-1 Part 31
Temp. rise	380 V, 400 V, 415 V	Applicable at 50 Hz
	460 V	Applicable
	575 V	Applicable
Service Factor	Sine Wave Power	B
	VFD Power	F
	Sine Wave Power	1.15
Inverter duty	VFD Power	1.0
	Variable Torque 6 - 60 Hz	Applicable
	Variable Torque 3 - 60 Hz	Fr. L449 - 5011 at 50 % Load
	Constant Torque 6 - 60 Hz	Fr. L449 - 5011
	Constant Torque 30 - 60 Hz	Fr. 5812
	Constant HP	Fr. L449 - 5011

Product Mechanical Features

Mounting	Foot mount (B3)		Foot drilled hole(s)
	C-face with Foot (B35)		Applicable
	D-flange with Foot (B35)		Applicable
	C-face without Foot (V1)		Applicable
	D-flange without Foot (V1)		Applicable
Material	Frame		Cast-iron
	Rotor		Aluminum die casting or Centrifugal cast aluminum
	End-shield		Cast-iron
	Fan		Non-sparking conductive plastic fan
	Fan cover		Fabricated steel
Rotation	BI-directional		Fr. L449 - 5812 at 1800, 1200 RPM
	Uni-directional		Fr. L449 - 5812 at 3600 RPM
	Drive end		Ball or Roller I Regreasable
Bearing	Non-Drive end		Ball or Insulation I Regreasable
	Protection	Labyrinth seal	Fr. L449 - 5812 at 3600 RPM
		ProTech seal	Fr. L449 - 5812 at 1800, 1200 RPM
	Inner Bearing Cap		Applied
	Lubrication		Polyurea (Polyrex EM grease)
Shaft	Material	AISI 1045	Fr. L449 at 3600 RPM
		AISI 4140	Fr. L449 - 5812 at 1800, 1200 RPM
	DE threaded hole		Applied
	DE Keyway		Opened keyway
Terminal box	Shaft locking device		Frames with Roller bearing (To prevent Bearing brinelling)
	Material	Cast-iron	Fr. L449 - 5011
		Fabricated Steel	Fr. 5812
	Mounting	Cast-iron	F1 or F2
		Fabricated Steel	F1 or F2
Lead cable	Cable hole plug		Plastic
	Number of lead wire(s)		6 Lead(s)
	W.T.D (PT 100 Ohm)		2 EA / phase
Accessories	B.T.D (PT 100 Ohm)		1 EA / Bearing
	Space Heater		1 EA / Motor
	Auxiliary Terminal box		2 EA / Motor
Drain Plug	Frame		Both sides of frame bottom
	Main Terminal Box		None
	Grease outlet		Applied
Tap provision	For Vib. Sensor		Applied
	For B.T.D		Applied
Certification	CSA	Class I, Division 2	Groups A, B, C & D *** Note (1)
		Class II, Division 2	Groups E, F & G *** Note (2)
		CSA C-390	Premium Efficiency (Up to 500 HP)
	DOE	Certi. #CC0038A	Department of Energy Efficiency
	CE	EN 60034-1	CE Declaration of Conformity
Name plate	IEEE45	ABS Product Type Approval	Marine Duty (Up to 600 HP / Fr. L449 - 5011)
	Markings		CSA, CC(DOE), CE
Painting	Material		Stainless Steel AISI304
	Type		Epoxy Zinc with Polyurethane top coat
	Color		Munsell 7.5BG6/1.5
Common	Lifting device		Eye bolt(s)
	Warranty		5 Years from Date of shipment

※ Notes (1)

1) Temp. code at Sine Wave Power : T3 (Fr. L449 - 5011)

T3A (Fr. 5812)

2) Temp. code at VFD Power : T3 (Fr. L449 - 5011)

※ Notes (2)

1) Group F&G : Fr. L449 - 5011

Explosion proof Premium Efficiency



Product Electrical Features

HYUNDAI Product Type	IXHHI	Fr. 143 - 449
Common	Motor power (HP)	1 HP - 250 HP
	Speed (RPM)	3600, 1800 or 1200
	Frequency	60 Hz
	Altitude	3,300 ft.
	Ambient temp.	40 °C
	Enclosure I Protection	Totally Enclosed (Protection : IP55)
	Method of Cooling	IC411 (FC)
	Efficiency	NEMA Premium
	Duty	Continuous (S1)
	Design	NEMA Design B Torque
Voltage	Insulation Class	F (Impregnation Resin & Magnet wire : Class H)
		Inverter duty, Exceeds NEMA MG-1 Part 31
	230/460 V	1 HP - 125 HP
	380 V, 400 V, 415 V	Applicable at 50 Hz
Temp. rise	460 V	150 HP - 250 HP
	575 V	Applicable
Service Factor	Sine Wave Power	B
	VFD Power	F
Inverter duty	Sine Wave Power	1.15
	VFD Power	1.0
Inverter duty	Temp. rise F & Non-hazardous	1.25 (Up to Fr. 143 - 365)
	Variable Torque 6 - 60 Hz	Applicable
	Variable Torque 3 - 60 Hz	Applicable at 50 % Load
	Constant Torque 10.5 - 60 Hz	Fr. 143 - 215
	Constant Torque 15 - 60 Hz	Fr. 254 - 449
	Constant Torque 6 - 60 Hz	Fr. 143 - 449 at 1 hour duty
	Constant HP	CHP up to 1.5 times base speed

Product Mechanical Features

Mounting	Foot mount (B3)		Foot drilled hole(s)
	C-face with Foot (B35)		Fr. 143 - 326
	C-face without Foot (B5, V1)		Fr. 143 - 326
Material	Frame		Cast-iron
	Rotor		Aluminum die casting
	End-shield		Cast-iron
	Fan		Non-sparking conductive plastic fan
Rotation	Fan cover		Steel
	Bi-directional		Applicable
Bearing	Drive end		Ball or Roller I Regreasable (Fr. 254 - 449)
	Non-Drive end		Ball I Regreasable (Fr. 254 - 449)
	Protection	V-seal	Fr. 143 - 326
		Labyrinth	Fr. 364 - 449
Shaft	Inner Bearing Cap		Applied
	Lubrication		Polyurea (Polyrex EM grease)
	Material		AISI 1045
	DE threaded hole		Applied
	DE Keyway		Opened keyway
Terminal box	Shaft locking device		Frames with Roller bearing (To prevent Bearing brinelling)
	Material		Cast-iron
	Mounting (F1 or F2)		F1 to F2 conversion available
Lead cable	Cable hole plug		Plastic
	Number of lead wire(s)		9 lead(s) I Fr. 143 - 215
	Number of lead wire(s)		12 lead(s) I Fr. 254 - 365
Accessories	Number of lead wire(s)		6 lead(s) I Fr. 404 - 449
	W.T.D (Thermostat)		1 EA / phase (145 °C)
Drain Plug	Frame		Both sides of frame bottom
	Main Terminal Box		None
Tap provision	Grease outlet		Fr. 254 - 449
	For Vib. Sensor		Fr. 364 - 449
	For B.T.D		Fr. 364 - 449
	UL	Class I, Division 1	Group C & D *** Note (1)
		Class II, Division 1	Group F & G *** Note (2)
	CSA	CSA C-390	Premium Efficiency
	DOE	Certi. #CC0038A	Department of Energy Efficiency
Name plate	CE	EN 60034-1	CE Declaration of Conformity
	Markings		UL LISTED, CSA ,CC(DOE), CE
Painting	Material		Stainless Steel AISI304
	Type		Polyurethane top coat
Common	Color		Munsell 4.0PB5.4/5.5
	Lifting device		Eye bolt(s)
	Warranty		3 Years from Date of shipment

※ Notes (1)

- 1) Temperature code : T2C (Fr. 143 - 215)
T2D (Fr. 254 - 286)
T3 (Fr. 354 - 449)
T4 (Fr. 143 - 449) with Thermostat

※ Notes (2)

- 1) Temperature code : T3B (Fr. 143 - 326)

HES, HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, Foot mounted



Features


- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~125 HP), 460 V (150 HP~)
- NEMA Design B
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

Foot Mounted

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HES1-36-143T	1	143T	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	69	55
HES1-18-143T	1	143T	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	56	55
HES1-12-145T	1	145T	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	55
HES1.5-36-143T	1.5	143T	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	69	55
HES1.5-18-145T	1.5	145T	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	56	55
HES1.5-12-182T	1.5	182T	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	55	105
HES2-36-145T	2	145T	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	69	55
HES2-18-145T	2	145T	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	56	55
HES2-12-184T	2	184T	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	55	105
HES3-36-182T	3	182T	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	72	105
HES3-18-182T	3	182T	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	60	105
HES3-12-213T	3	213T	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	57	150
HES5-36-184T	5	184T	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	72	105
HES5-18-184T	5	184T	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	60	105
HES5-12-215T	5	215T	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	57	175
HES7.5-36-213T	7.5	213T	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	73	150
HES7.5-18-213T	7.5	213T	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	62	150
HES7.5-12-254T	7.5	254T	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	240
HES10-36-215T	10	215T	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	73	175
HES10-18-215T	10	215T	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	62	175
HES10-12-256T	10	256T	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	290
HES15-36-254T	15	254T	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	77	240
HES15-18-254T	15	254T	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	70	240
HES15-12-284T	15	284T	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	65	360
HES20-36-256T	20	256T	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	77	290
HES20-18-256T	20	256T	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	70	290
HES20-12-286T	20	286T	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	65	410
HES25-36-284TS	25	284TS	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	80	360
HES25-18-284T	25	284T	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	72	360
HES25-12-324T	25	324T	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	68	550
HES30-36-286TS	30	286TS	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	80	410
HES30-18-286T	30	286T	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	72	410
HES30-12-326T	30	326T	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	68	560
HES40-36-324TS	40	324TS	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	82	550
HES40-18-324T	40	324T	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	74	550
HHI40-12-364T	40	364T	1185	230/460	94.1	0.82	97.6/48.8	680	178.36	150	220	73	780
HES50-36-326TS	50	326TS	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	82	560
HES50-18-326T	50	326T	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	74	560
HHI50-12-365T	50	365T	1185	230/460	94.1	0.82	120.4/60.2	680	219.98	150	220	73	820
HHI60-36-364TS	60	364TS	3570	230/460	94.1	0.92	131.2/65.6	680	88.81	140	220	82	780
HHI60-18-364T	60	364T	1780	230/460	95.0	0.85	139.9/69.9	670	178.11	150	220	82	780
HHI60-12-404T	60	404T	1185	230/460	94.5	0.84	142.3/71.2	670	267.54	140	220	75	1120
HHI75-36-365TS	75	365TS	3570	230/460	94.5	0.92	159.7/79.8	680	108.54	140	220	82	820
HHI75-18-365T	75	365T	1780	230/460	95.4	0.85	170.3/85.1	690	217.69	150	220	82	820
HHI75-12-405T	75	405T	1185	230/460	94.5	0.84	173.9/87	680	326.99	140	220	75	1120
HHI100-36-405TS	100	405TS	3570	230/460	94.5	0.91	220.1/110.1	700	148.01	120	220	87	1120
HHI100-18-405T	100	405T	1780	230/460	95.4	0.87	228.1/114.1	650	296.85	140	220	82	1120
HHI100-12-444T	100	444T	1185	230/460	95	0.85	233.1/116.6	680	445.90	140	220	80	1530
HHI125-36-444TS	125	444TS	3570	230/460	95	0.90	278.9/139.5	700	187.48	120	220	92	1610
HHI125-18-444T	125	444T	1785	230/460	95.4	0.88	284.1/142	700	374.96	140	220	85	1530
HHI125-12-445T	125	445T	1185	230/460	95	0.85	295.3/147.7	675	564.81	140	220	80	1640
HHI150-36-445TS	150	445TS	3570	460	95	0.90	323/161.5	700	217.08	120	220	92	1770
HHI150-18-445T	150	445T	1785	460	95.8	0.88	327.5/163.8	700	434.16	140	220	85	1640
HHI150-12-447T	150	447T	1185	460	95.8	0.85	339.1/169.5	680	653.99	140	220	80	1860
HHI200-36-447TS	200	447TS	3570	460	95.4	0.90	438.5/219.3	700	296.02	120	220	92	1900
HHI200-18-447T	200	447T	1785	460	96.2	0.88	444.8/222.4	700	592.04	140	220	85	1860
HHI200-12-449T	200	449T	1185	460	95.8	0.85	462.4/231.2	680	891.80	140	220	80	2430
HHI250-36-449TS	250	449TS	3570	460	95.8	0.90	553.2/276.6	700	374.96	120	220	92	2430
HHI250-18-449T	250	449T	1785	460	96.2	0.88	563.4/281.7	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

HSDE Model - Severe duty, Large motor Three phase, TEFC, Foot mounted



Features

- Insulation Class F, Temperature rise B or F, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- WTD PT 100 Ohm 2 EA/Phase
- BTD PT 100 Ohm 1 EA/Bearing
- Heater 1 EA/Motor
- Auxiliary Terminal Box 2EA/Motor
- Tap provision for Vib. sensor (Except Vib. sensor)

Catalog Number Suffix

- BB : Ball Bearing
- IB : Insulation Bearing on N-DE
- 2IB : Insulation Bearing on DE & N-DE
- BR : Bearing RTDs (1 EA/Bearing) with Aux. T/box
- SR : Stator RTDs (2 EA/Ph.) with Aux. T/box
- SH : Space Heater (1 EA/Motor) with Aux. T/box
- SP : Spare part (Spare cooling fan)
- LL : Long lead cable
- F : Temp. rise F (Standard Temp. rise B at Ambient temp. 40 °C)

Foot Mounted

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HSDE250-12-L449T-IBBRSRSH	250	L449T	1185	460	95.8	0.84	296.3	680	1129.6	135	200	80	2890
HSDE300-36-L449TS-IBBRSRSHSP	300	L449TS	3570	460	95.8	0.90	327.5	700	444.0	130	225	87	2890
HSDE300-18-L449T-IBBRSRSH	300	L449T	1785	460	96.2	0.88	333.6	710	888.1	135	225	85	2890
HSDE300-12-L449T-IBBRSRSH	300	L449T	1185	460	95.8	0.84	350.9	675	1337.7	135	220	80	3320
HSDE350-36-L449TS-IBBRSRSHSP	350	L449TS	3570	460	95.8	0.90	378.5	700	513.1	130	225	87	3090
HSDE350-18-L449T-IBBRSRSH	350	L449T	1785	460	96.2	0.88	385.5	715	1026.2	135	225	85	3090
HSDE350-12-L449T-IBBRSRSH	350	L449T	1185	460	95.8	0.84	407.1	650	1551.7	120	200	80	3380
HSDE400-36-L449TS-IBBRSRSHSP	400	L449TS	3570	460	95.8	0.90	436.7	680	592.0	145	240	87	3820
HSDE400-18-L449T-IBBRSRSH	400	L449T	1785	460	96.2	0.88	444.8	710	1184.1	135	225	85	3620
HSDE400-12-5009-IBBRSRSH	400	5009	1185	460	95.8	0.84	467.9	680	1783.6	135	220	84	3970
HSDE450-36-5009S-IBBRSRSHSP	450	5009S	3570	460	95.8	0.90	487.7	725	661.1	130	230	87	3860
HSDE450-18-5009-IBBRSRSH	450	5009	1785	460	96.2	0.89	491.1	720	1322.2	135	230	85	3970
HSDE450-12-5009-IBBRSRSH	450	5009	1185	460	95.8	0.84	522.5	675	1991.7	135	220	84	4030
HSDE500-36-5010S-IBBRSRSHSP	500	5010S	3570	460	95.8	0.90	545.9	725	740.0	145	240	87	4800
HSDE500-18-5010-IBBRSRSH	500	5010	1785	460	96.2	0.89	549.7	720	1480.1	135	220	85	4820
HSDE500-12-5011-IBBRSRSH	500	5010	1185	460	95.8	0.84	584.9	675	2229.5	135	220	84	4850
HSDE600-18-5011-IBBRSRSH	600	5011	1785	460	96.2	0.89	659.7	720	1776.1	135	230	85	4940
HSDE600-36-5812S-IBBRSRSHSP	600	5812S	3570	460	95.8	0.89	662.4	670	888.1	150	250	89	6730
HSDE600-12-5812-IBBRSRSH-F *	600	5812	1185	460	95.8	0.84	701.9	675	2675.4	135	220	85	6019
HSDE700-36-5812S-IBBRSRSHSP	700	5812S	3570	460	95.8	0.89	768.4	720	1030.1	150	250	89	6730
HSDE700-18-5812-IBBRSRSH	700	5812	1785	460	96.2	0.88	771.0	650	2052.4	120	220	87	7174
HSDE750-36-5812S-IBBRSRSHSP	750	5812S	3570	460	95.8	0.89	824.4	710	1105.1	150	250	89	6730
HSDE800-36-5812S-IBBRSRSHSP	800	5812S	3570	460	95.8	0.89	883.2	650	1184.1	130	240	89	6730
HSDE900-36-5812S-IBBRSRSHSP-F *	900	5812S	3570	460	95.8	0.89	987.8	700	1324.2	150	250	89	7130
HSDE250-12-L449T-IBSH	250	L449T	1185	460	95.8	0.84	296.3	680	1129.6	135	200	80	2890
HSDE300-36-L449TS-IBSHSP	300	L449TS	3570	460	95.8	0.90	327.5	700	444.0	130	225	87	2890
HSDE300-18-L449T-IBSH	300	L449T	1785	460	96.2	0.88	333.6	710	888.1	135	225	85	2890
HSDE300-12-L449T-IBSH	300	L449T	1185	460	95.8	0.84	350.9	675	1337.7	135	220	80	3320
HSDE350-36-L449TS-IBSHSP	350	L449TS	3570	460	95.8	0.90	378.5	700	513.1	130	225	87	3090
HSDE350-18-L449T-IBSH	350	L449T	1785	460	96.2	0.88	385.5	715	1026.2	135	225	85	3090
HSDE350-12-L449T-IBSH	350	L449T	1185	460	95.8	0.84	407.1	650	1551.7	120	200	80	3380
HSDE400-36-L449TS-IBSHSP	400	L449TS	3570	460	95.8	0.90	436.7	680	592.0	145	240	87	3820
HSDE400-18-L449T-IBSH	400	L449T	1785	460	96.2	0.88	444.8	710	1184.1	135	225	85	3620
HSDE400-12-5009-IBSH	400	5009	1185	460	95.8	0.84	467.9	680	1783.6	135	220	84	3970
HSDE450-36-5009S-IBSHSP	450	5009S	3570	460	95.8	0.90	487.7	725	661.1	130	230	87	3860
HSDE450-18-5009-IBSH	450	5009	1785	460	96.2	0.89	491.1	720	1322.2	135	230	85	3970
HSDE450-12-5009-IBSH	450	5009	1185	460	95.8	0.84	522.5	675	1991.7	135	220	84	4030
HSDE500-36-5010S-IBSHSP	500	5010S	3570	460	95.8	0.90	545.9	725	740.0	145	240	87	4800
HSDE500-18-5010-IBSH	500	5010	1785	460	96.2	0.89	549.7	720	1480.1	135	220	85	4820
HSDE500-12-5011-IBSH	500	5010	1185	460	95.8	0.84	584.9	675	2229.5	135	220	84	4850
HSDE600-18-5011-IBSH	600	5011	1785	460	96.2	0.89	659.7	720	1776.1	135	230	85	4940
HSDE600-36-5812S-IBSHSP	600	5812S	3570	460	95.8	0.89	662.4	670	888.1	150	250	89	6730
HSDE600-12-5812-IBSH-F	600	5812	1185	460	95.8	0.84	701.9	675	2675.4	135	220	85	6019
HSDE700-36-5812S-IBSHSP	700	5812S	3570	460	95.8	0.89	768.4	720	1030.1	150	250	89	6730
HSDE700-18-5812-IBSH	700	5812	1785	460	96.2	0.88	771.0	650	2052.4	120	220	87	7174
HSDE750-36-5812S-IBSHSP	750	5812S	3570	460	95.8	0.89	824.4	710	1105.1	150	250	89	6730
HSDE800-36-5812S-IBSHSP	800	5812S	3570	460	95.8	0.89	883.2	650	1184.1	130	240	89	6730
HSDE900-36-5812S-IBSHSP-F	900	5812S	3570	460	95.8	0.89	987.8	700	1324.2	150	250	89	7130

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

※ Remarks

1. Applicable to Each single of accessory (Ex. IB, SH, IBSH & etc.)
2. Standard temperature rise B for HSDE Model (Except 900 HP Motor)
3. Motor power(HP) for HSDE model : Up to 900 HP

Severe duty Features HES/HHI Model
Severe duty Features HSDE Model
IEEE841 Features HL Model
IEEE841 Features XL Model
Explosion proof Features DX/HI Model
Severe duty Performances HES/HHI Model
Severe duty Performances HSDE Model
IEEE841 Performances HL Model
IEEE841 Performances XL Model
Explosion proof Performances DX/HI Model
Severe duty Dimensions HES/HHI Model
Severe duty Dimensions HSDE Model
IEEE841 Dimensions HL Model
IEEE841 Dimensions XL Model
Explosion proof Dimensions DX/HI Model

HES, HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, C-Face, Foot mounted



Features


- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~ 125 HP), 460 V (150 HP ~)
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

C-Face, Foot Mounted

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HES1-36-143TC	1	143TC	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	69	55
HES1-18-143TC	1	143TC	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	56	55
HES1-12-145TC	1	145TC	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	55
HES1.5-36-143TC	1.5	143TC	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	69	55
HES1.5-18-145TC	1.5	145TC	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	56	55
HES1.5-12-182TC	1.5	182TC	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	55	105
HES2-36-145TC	2	145TC	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	69	55
HES2-18-145TC	2	145TC	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	56	55
HES2-12-184TC	2	184TC	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	55	105
HES3-36-182TC	3	182TC	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	72	105
HES3-18-182TC	3	182TC	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	60	105
HES3-12-213TC	3	213TC	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	57	150
HES5-36-184TC	5	184TC	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	72	105
HES5-18-184TC	5	184TC	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	60	105
HES5-12-215TC	5	215TC	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	57	175
HES7.5-36-213TC	7.5	213TC	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	73	150
HES7.5-18-213TC	7.5	213TC	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	62	150
HES7.5-12-254TC	7.5	254TC	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	240
HES10-36-215TC	10	215TC	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	73	175
HES10-18-215TC	10	215TC	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	62	175
HES10-12-256TC	10	256TC	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	290
HES15-36-254TC	15	254TC	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	77	240
HES15-18-254TC	15	254TC	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	70	240
HES15-12-284TC	15	284TC	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	65	360
HES20-36-256TC	20	256TC	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	77	290
HES20-18-256TC	20	256TC	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	70	290
HES20-12-286TC	20	286TC	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	65	410
HES25-36-284TSC	25	284TSC	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	80	360
HES25-18-284TC	25	284TC	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	72	360
HES25-12-324TC	25	324TC	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	68	550
HES30-36-286TSC	30	286TSC	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	80	410
HES30-18-286TC	30	286TC	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	72	410
HES30-12-326TC	30	326TC	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	68	560
HES40-36-324TSC	40	324TSC	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	82	550
HES40-18-324TC	40	324TC	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	74	550
HHI40-12-364TC	40	364TC	1185	230/460	94.1	0.82	97.6/48.8	680	178.36	150	220	73	780
HES50-36-326TSC	50	326TSC	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	82	560
HES50-18-326TC	50	326TC	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	74	560
HHI50-12-365TC	50	365TC	1185	230/460	94.1	0.82	120.4/60.2	680	219.98	150	220	73	820
HHI60-36-364TSC	60	364TSC	3570	230/460	94.1	0.92	131.2/65.6	680	88.81	140	220	82	780
HHI60-18-364TC	60	364TC	1780	230/460	95.0	0.85	139.9/69.9	670	178.11	150	220	82	780
HHI60-12-404TC	60	404TC	1185	230/460	94.5	0.84	142.3/71.2	670	267.54	140	220	75	1120
HHI75-36-365TSC	75	365TSC	3570	230/460	94.5	0.92	159.7/79.8	680	108.54	140	220	82	820
HHI75-18-365TC	75	365TC	1780	230/460	95.4	0.85	170.3/85.1	690	217.69	150	220	82	820
HHI75-12-405TC	75	405TC	1185	230/460	94.5	0.84	173.9/87	680	326.99	140	220	75	1120
HHI100-36-405TSC	100	405TSC	3570	230/460	94.5	0.91	220.1/110.1	700	148.01	120	220	87	1120
HHI100-18-405TC	100	405TC	1780	230/460	95.4	0.87	228.1/114.1	650	296.85	140	220	82	1120
HHI100-12-444TC	100	444TC	1185	230/460	95	0.85	233.1/116.6	680	445.90	140	220	80	1530
HHI125-36-444TSC	125	444TSC	3570	230/460	95	0.90	278.9/139.5	700	187.48	120	220	92	1610
HHI125-18-444TC	125	444TC	1785	230/460	95.4	0.88	284.1/142	700	374.96	140	220	85	1530
HHI125-12-445TC	125	445TC	1185	230/460	95	0.85	295.3/147.7	675	564.81	140	220	80	1640
HHI150-36-445TSC	150	445TSC	3570	460	95	0.90	323/161.5	700	217.08	120	220	92	1770
HHI150-18-445TC	150	445TC	1785	460	95.8	0.88	327.5/163.8	700	434.16	140	220	85	1640
HHI150-12-447TC	150	447TC	1185	460	95.8	0.85	339.1/169.5	680	653.99	140	220	80	1860
HHI200-36-447TSC	200	447TSC	3570	460	95.4	0.90	438.5/219.3	700	296.02	120	220	92	1900
HHI200-18-447TC	200	447TC	1785	460	96.2	0.88	444.8/222.4	700	592.04	140	220	85	1860
HHI200-12-449TC	200	449TC	1185	460	95.8	0.85	462.4/231.2	680	891.80	140	220	80	2430
HHI250-36-449TSC	250	449TSC	3570	460	95.8	0.90	553.2/276.6	700	374.96	120	220	92	2430
HHI250-18-449TC	250	449TC	1785	460	96.2	0.88	563.4/281.7	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

HSDE Model - Severe duty, Large motor Three phase, TEFC, C-Face, Foot mounted



Features

- Insulation Class F, Temperature rise B or F, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- WTD PT 100 Ohm 2 EA/Phase
- BTD PT 100 Ohm 1 EA/Bearing
- Heater 1 EA/Motor
- Auxiliary Terminal Box 2 EA/Motor
- Tap provision for Vib. sensor (Except Vib. sensor)

Catalog Number Suffix

- BB : Ball Bearing
- IB : Insulation Bearing on N-DE
- 2IB : Insulation Bearing on DE & N-DE
- BR : Bearing RTDs (1 EA/Bearing) with Aux. T/box
- SR : Stator RTDs (2 EA/Ph.) with Aux. T/box
- SH : Space Heater (1 EA/Motor) with Aux. T/box
- SP : Spare part (Spare cooling fan)
- LL : Long lead cable
- F : Temp. rise F (Standard Temp. rise B at Ambient temp. 40 °C)

C-Face, Foot Mounted

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HSDE250-12-L449TC-IBBRSRSH	250	L449TC	1185	460	95.8	0.84	296.3	680	1129.6	135	200	80	2890
HSDE300-36-L449TSC-IBBRSRSHSP	300	L449TSC	3570	460	95.8	0.90	327.5	700	444.0	130	225	87	2890
HSDE300-18-L449TC-IBBRSRSH	300	L449TC	1785	460	96.2	0.88	333.6	710	888.1	135	225	85	2890
HSDE300-12-L449TC-IBBRSRSH	300	L449TC	1185	460	95.8	0.84	350.9	675	1337.7	135	220	80	3320
HSDE350-36-L449TSC-IBBRSRSHSP	350	L449TSC	3570	460	95.8	0.90	378.5	700	513.1	130	225	87	3090
HSDE350-18-L449TC-IBBRSRSH	350	L449TC	1785	460	96.2	0.88	385.5	715	1026.2	135	225	85	3090
HSDE350-12-L449TC-IBBRSRSH	350	L449TC	1185	460	95.8	0.84	407.1	650	1551.7	120	200	80	3380
HSDE400-36-L449TSC-IBBRSRSHSP	400	L449TSC	3570	460	95.8	0.90	436.7	680	592.0	145	240	87	3820
HSDE400-18-L449TC-IBBRSRSH	400	L449TC	1785	460	96.2	0.88	444.8	710	1184.1	135	225	85	3620
HSDE400-12-5009C-IBBRSRSH	400	5009C	1185	460	95.8	0.84	467.9	680	1783.6	135	220	84	3970
HSDE450-36-5009SC-IBBRSRSHSP	450	5009SC	3570	460	95.8	0.90	487.7	725	661.1	130	230	87	3860
HSDE450-18-5009C-IBBRSRSH	450	5009C	1785	460	96.2	0.89	491.1	720	1322.2	135	230	85	3970
HSDE450-12-5009C-IBBRSRSH	450	5009C	1185	460	95.8	0.84	522.5	675	1991.7	135	220	84	4030
HSDE500-36-5010SC-IBBRSRSHSP	500	5010SC	3570	460	95.8	0.90	545.9	725	740.0	145	240	87	4800
HSDE500-18-5010C-IBBRSRSH	500	5010C	1785	460	96.2	0.89	549.7	720	1480.1	135	220	85	4820
HSDE500-12-5011C-IBBRSRSH	500	5010C	1185	460	95.8	0.84	584.9	675	2229.5	135	220	84	4850
HSDE600-18-5011C-IBBRSRSH	600	5011C	1785	460	96.2	0.89	659.7	720	1776.1	135	230	85	4940
HSDE600-36-5812SC-IBBRSRSHSP	600	5812SC	3570	460	95.8	0.89	662.4	670	888.1	150	250	89	6730
HSDE600-12-5812C-IBBRSRSH-F	600	5812C	1185	460	95.8	0.84	701.9	675	2675.4	135	220	85	6019
HSDE700-36-5812SC-IBBRSRSHSP	700	5812SC	3570	460	95.8	0.89	768.4	720	1030.1	150	250	89	6730
HSDE700-18-5812C-IBBRSRSH	700	5812C	1785	460	96.2	0.88	771.0	650	2052.4	120	220	87	7174
HSDE750-36-5812SC-IBBRSRSHSP	750	5812SC	3570	460	95.8	0.89	824.4	710	1105.1	150	250	89	6730
HSDE800-36-5812SC-IBBRSRSHSP	800	5812SC	3570	460	95.8	0.89	883.2	650	1184.1	130	240	89	6730
HSDE900-36-5812SC-IBBRSRSHSP-F	900	5812SC	3570	460	95.8	0.89	987.8	700	1324.2	150	250	89	7130
HSDE250-12-L449TC-IBSH	250	L449TC	1185	460	95.8	0.84	296.3	680	1129.6	135	200	80	2890
HSDE300-36-L449TSC-IBSHSP	300	L449TSC	3570	460	95.8	0.90	327.5	700	444.0	130	225	87	2890
HSDE300-18-L449TC-IBSH	300	L449TC	1785	460	96.2	0.88	333.6	710	888.1	135	225	85	2890
HSDE300-12-L449TC-IBSH	300	L449TC	1185	460	95.8	0.84	350.9	675	1337.7	135	220	80	3320
HSDE350-36-L449TSC-IBSHSP	350	L449TSC	3570	460	95.8	0.90	378.5	700	513.1	130	225	87	3090
HSDE350-18-L449TC-IBSH	350	L449TC	1785	460	96.2	0.88	385.5	715	1026.2	135	225	85	3090
HSDE350-12-L449TC-IBSH	350	L449TC	1185	460	95.8	0.84	407.1	650	1551.7	120	200	80	3380
HSDE400-36-L449TSC-IBSHSP	400	L449TSC	3570	460	95.8	0.90	436.7	680	592.0	145	240	87	3820
HSDE400-18-L449TC-IBSH	400	L449TC	1785	460	96.2	0.88	444.8	710	1184.1	135	225	85	3620
HSDE400-12-5009C-IBSH	400	5009C	1185	460	95.8	0.84	467.9	680	1783.6	135	220	84	3970
HSDE450-36-5009SC-IBSHSP	450	5009SC	3570	460	95.8	0.90	487.7	725	661.1	130	230	87	3860
HSDE450-18-5009C-IBSH	450	5009C	1785	460	96.2	0.89	491.1	720	1322.2	135	230	85	3970
HSDE450-12-5009C-IBSH	450	5009C	1185	460	95.8	0.84	522.5	675	1991.7	135	220	84	4030
HSDE500-36-5010SC-IBSHSP	500	5010SC	3570	460	95.8	0.90	545.9	725	740.0	145	240	87	4800
HSDE500-18-5010C-IBSH	500	5010C	1785	460	96.2	0.89	549.7	720	1480.1	135	220	85	4820
HSDE500-12-5011C-IBSH	500	5010C	1185	460	95.8	0.84	584.9	675	2229.5	135	220	84	4850
HSDE600-18-5011C-IBSH	600	5011C	1785	460	96.2	0.89	659.7	720	1776.1	135	230	85	4940
HSDE600-36-5812SC-IBSHSP	600	5812SC	3570	460	95.8	0.89	662.4	670	888.1	150	250	89	6730
HSDE600-12-5812C-IBSH-F	600	5812C	1185	460	95.8	0.84	701.9	675	2675.4	135	220	85	6019
HSDE700-36-5812SC-IBSHSP	700	5812SC	3570	460	95.8	0.89	768.4	720	1030.1	150	250	89	6730
HSDE700-18-5812C-IBSH	700	5812C	1785	460	96.2	0.88	771.0	650	2052.4	120	220	87	7174
HSDE750-36-5812SC-IBSHSP	750	5812SC	3570	460	95.8	0.89	824.4	710	1105.1	150	250	89	6730
HSDE800-36-5812SC-IBSHSP	800	5812SC	3570	460	95.8	0.89	883.2	650	1184.1	130	240	89	6730
HSDE900-36-5812SC-IBSHSP-F	900	5812SC	3570	460	95.8	0.89	987.8	700	1324.2	150	250	89	7130

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

※ Remarks

1. Applicable to Each single of accessory (Ex. IB, SH, IBSH & etc.)
2. Standard temperature rise B for HSDE Model (Except 900 HP Motor)
3. Motor power(HP) for HSDE model : Up to 900 HP
4. Applicable to the following mounting type.
 - 1) D-flange with Foot
 - 2) Vertical, C-face without Foot
 - 3) Vertical, D-flange without Foot

Severe duty Features HES/HHT Model
Severe duty Features HSDE Model
IEEE841 Features HL Model
IEEE841 Features XL Model
Explosion proof Features DX/HHT Model
Severe duty Performances HES/HHT Model
Severe duty Performances HSDE Model
IEEE841 Performances HL Model
IEEE841 Performances XL Model
Explosion proof Performances DX/HHT Model
Severe duty Dimensions HES/HHT Model
Severe duty Dimensions HSDE Model
IEEE841 Dimensions HL Model
IEEE841 Dimensions XL Model
Explosion proof Dimensions DX/HHT Model

HES, HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, D-Flange, Foot mounted



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~ 125 HP), 460 V (150 HP ~)
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

D-Flange, Foot Mounted

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HES1-36-143TD	1	143TD	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	69	55
HES1-18-143TD	1	143TD	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	56	55
HES1-12-145TD	1	145TD	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	55
HES1.5-36-143TD	1.5	143TD	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	69	55
HES1.5-18-145TD	1.5	145TD	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	56	55
HES1.5-12-182TD	1.5	182TD	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	55	105
HES2-36-145TD	2	145TD	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	69	55
HES2-18-145TD	2	145TD	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	56	55
HES2-12-184TD	2	184TD	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	55	105
HES3-36-182TD	3	182TD	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	72	105
HES3-18-182TD	3	182TD	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	60	105
HES3-12-213TD	3	213TD	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	57	150
HES5-36-184TD	5	184TD	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	72	105
HES5-18-184TD	5	184TD	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	60	105
HES5-12-215TD	5	215TD	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	57	175
HES7.5-36-213TD	7.5	213TD	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	73	150
HES7.5-18-213TD	7.5	213TD	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	62	150
HES7.5-12-254TD	7.5	254TD	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	240
HES10-36-215TD	10	215TD	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	73	175
HES10-18-215TD	10	215TD	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	62	175
HES10-12-256TD	10	256TD	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	290
HES15-36-254TD	15	254TD	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	77	240
HES15-18-254TD	15	254TD	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	70	240
HES15-12-284TD	15	284TD	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	65	360
HES20-36-256TD	20	256TD	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	77	290
HES20-18-256TD	20	256TD	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	70	290
HES20-12-286TD	20	286TD	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	65	410
HES25-36-284TSD	25	284TSD	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	80	360
HES25-18-284TD	25	284TD	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	72	360
HES25-12-324TD	25	324TD	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	68	550
HES30-36-286TSD	30	286TSD	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	80	410
HES30-18-286TD	30	286TD	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	72	410
HES30-12-326TD	30	326TD	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	68	560
HES40-36-324TSD	40	324TSD	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	82	550
HES40-18-324TD	40	324TD	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	74	550
HHI40-12-364TD	40	364TD	1185	230/460	94.1	0.82	97.6/48.8	680	178.36	150	220	73	780
HES50-36-326TSD	50	326TSD	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	82	560
HES50-18-326TD	50	326TD	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	74	560
HHI50-12-365TD	50	365TD	1185	230/460	94.1	0.82	120.4/60.2	680	219.98	150	220	73	820
HHI60-36-364TSD	60	364TSD	3570	230/460	94.1	0.92	131.2/65.6	680	88.81	140	220	82	780
HHI60-18-364TD	60	364TD	1780	230/460	95.0	0.85	139.9/69.9	670	178.11	150	220	82	780
HHI60-12-404TD	60	404TD	1185	230/460	94.5	0.84	142.3/71.2	670	267.54	140	220	75	1120
HHI75-36-365TSD	75	365TSD	3570	230/460	94.5	0.92	159.7/79.8	680	108.54	140	220	82	820
HHI75-18-365TD	75	365TD	1780	230/460	95.4	0.85	170.3/85.1	690	217.69	150	220	82	820
HHI75-12-405TD	75	405TD	1185	230/460	94.5	0.84	173.9/87	680	326.99	140	220	75	1120
HHI100-36-405TSD	100	405TSD	3570	230/460	94.5	0.91	220.1/110.1	700	148.01	120	220	87	1120
HHI100-18-405TD	100	405TD	1780	230/460	95.4	0.87	228.1/114.1	650	296.85	140	220	82	1120
HHI100-12-444TD	100	444TD	1185	230/460	95	0.85	233.1/116.6	680	445.90	140	220	80	1530
HHI125-36-444TSD	125	444TSD	3570	230/460	95	0.90	278.9/139.5	700	187.48	120	220	92	1610
HHI125-18-444TD	125	444TD	1785	230/460	95.4	0.88	284.1/142	700	374.96	140	220	85	1530
HHI125-12-445TD	125	445TD	1185	230/460	95	0.85	295.3/147.7	675	564.81	140	220	80	1640
HHI150-36-445TSD	150	445TSD	3570	460	95	0.90	323/161.5	700	217.08	120	220	92	1770
HHI150-18-445TD	150	445TD	1785	460	95.8	0.88	327.5/163.8	700	434.16	140	220	85	1640
HHI150-12-447TD	150	447TD	1185	460	95.8	0.85	339.1/169.5	680	653.99	140	220	80	1860
HHI200-36-447TSD	200	447TSD	3570	460	95.4	0.90	438.5/219.3	700	296.02	120	220	92	1900
HHI200-18-447TD	200	447TD	1785	460	96.2	0.88	444.8/222.4	700	592.04	140	220	85	1860
HHI200-12-449TD	200	449TD	1185	460	95.8	0.85	462.4/231.2	680	891.80	140	220	80	2430
HHI250-36-449TSD	250	449TSD	3570	460	95.8	0.90	553.2/276.6	700	374.96	120	220	92	2430
HHI250-18-449TD	250	449TD	1785	460	96.2	0.88	563.4/281.7	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

HES, HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, C-Face, Footless



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~ 125 HP), 460 V (150 HP ~)
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

C-Face, Footless

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HES1-36-143TCRD	1	143TC	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	69	55
HES1-18-143TCRD	1	143TC	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	56	55
HES1-12-145TCRD	1	145TC	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	55
HES1.5-36-143TCRD	1.5	143TC	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	69	55
HES1.5-18-145TCRD	1.5	145TC	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	56	55
HES1.5-12-182TCRD	1.5	182TC	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	55	105
HES2-36-145TCRD	2	145TC	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	69	55
HES2-18-145TCRD	2	145TC	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	56	55
HES2-12-184TCRD	2	184TC	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	55	105
HES3-36-182TCRD	3	182TC	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	72	105
HES3-18-182TCRD	3	182TC	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	60	105
HES3-12-213TCRD	3	213TC	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	57	150
HES5-36-184TCRD	5	184TC	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	72	105
HES5-18-184TCRD	5	184TC	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	60	105
HES5-12-215TCRD	5	215TC	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	57	175
HES7.5-36-213TCRD	7.5	213TC	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	73	150
HES7.5-18-213TCRD	7.5	213TC	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	62	150
HES7.5-12-254TCRD	7.5	254TC	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	240
HES10-36-215TCRD	10	215TC	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	73	175
HES10-18-215TCRD	10	215TC	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	62	175
HES10-12-256TCRD	10	256TC	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	290
HES15-36-254TCRD	15	254TC	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	77	240
HES15-18-254TCRD	15	254TC	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	70	240
HES15-12-284TCRD	15	284TC	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	65	360
HES20-36-256TCRD	20	256TC	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	77	290
HES20-18-256TCRD	20	256TC	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	70	290
HES20-12-286TCRD	20	286TC	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	65	410
HES25-36-284TSCRD	25	284TSC	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	80	360
HES25-18-284TSCRD	25	284TC	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	72	360
HES25-12-324TCRD	25	324TC	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	68	550
HES30-36-286TSCRD	30	286TSC	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	80	410
HES30-18-286TCRD	30	286TC	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	72	410
HES30-12-326TCRD	30	326TC	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	68	560
HES40-36-324TSCRD	40	324TSC	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	82	550
HES40-18-324TCRD	40	324TC	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	74	550
HHI40-12-364TCRD	40	364TC	1185	230/460	94.1	0.82	97.6/48.8	680	178.36	150	220	73	780
HES50-36-326TSCRD	50	326TSC	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	82	560
HES50-18-326TCRD	50	326TC	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	74	560
HHI50-12-365TCRD	50	365TC	1185	230/460	94.1	0.82	120.4/60.2	680	219.98	150	220	73	820
HHI60-36-364TSCRD	60	364TSC	3570	230/460	94.1	0.92	131.2/65.6	680	88.81	140	220	82	780
HHI60-18-364TCRD	60	364TC	1780	230/460	95.0	0.85	139.9/69.9	670	178.11	150	220	82	780
HHI60-12-404TCRD	60	404TC	1185	230/460	94.5	0.84	142.3/71.2	670	267.54	140	220	75	1120
HHI75-36-365TSCRD	75	365TSC	3570	230/460	94.5	0.92	159.7/79.8	680	108.54	140	220	82	820
HHI75-18-365TCRD	75	365TC	1780	230/460	95.4	0.85	170.3/85.1	690	217.69	150	220	82	820
HHI75-12-405TCRD	75	405TC	1185	230/460	94.5	0.84	173.9/87	680	326.99	140	220	75	1120
HHI100-36-405TSCRD	100	405TSC	3570	230/460	94.5	0.91	220.1/110.1	700	148.01	120	220	87	1120
HHI100-18-405TCRD	100	405TC	1780	230/460	95.4	0.87	228.1/114.1	650	296.85	140	220	82	1120
HHI100-12-444TCRD	100	444TC	1185	230/460	95	0.85	233.1/116.6	680	445.90	140	220	80	1530
HHI125-36-444TSCRD	125	444TSC	3570	230/460	95	0.90	278.9/139.5	700	187.48	120	220	92	1610
HHI125-18-444TCRD	125	444TC	1785	230/460	95.4	0.88	284.1/142	700	374.96	140	220	85	1530
HHI125-12-445TCRD	125	445TC	1185	230/460	95	0.85	295.3/147.7	675	564.81	140	220	80	1640
HHI150-36-445TSCRD	150	445TSC	3570	460	95	0.90	323/161.5	700	217.08	120	220	92	1770
HHI150-18-445TCRD	150	445TC	1785	460	95.8	0.88	327.5/163.8	700	434.16	140	220	85	1640
HHI150-12-447TCRD	150	447TC	1185	460	95.8	0.85	339.1/169.5	680	653.99	140	220	80	1860
HHI200-36-447TSCRD	200	447TSC	3570	460	95.4	0.90	438.5/219.3	700	296.02	120	220	92	1900
HHI200-18-447TCRD	200	447TC	1785	460	96.2	0.88	444.8/222.4	700	592.04	140	220	85	1860
HHI200-12-449TCRD	200	449TC	1185	460	95.8	0.85	462.4/231.2	680	891.80	140	220	80	2430
HHI250-36-449TSCRD	250	449TSC	3570	460	95.8	0.90	553.2/276.6	700	374.96	120	220	92	2430
HHI250-18-449TCRD	250	449TC	1785	460	96.2	0.88	563.4/281.7	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

Severe duty Features HES/HHI Model
Severe duty Features HSDE Model
IEEE841 Features HL Model
IEEE841 Features XL Model
Explosion proof Features DXHHI Model
Severe duty Performances HES/HHI Model
Severe duty Performances HSDE Model
IEEE841 Performances HL Model
IEEE841 Performances XL Model
Explosion proof Performances DXHHI Model
Severe duty Dimensions HES/HHI Model
Severe duty Dimensions HSDE Model
IEEE841 Dimensions HL Model
IEEE841 Dimensions XL Model
Explosion proof Dimensions DXHHI Model

HES, HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, D-Flange, Footless



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~ 125 HP), 460 V (150 HP ~)
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

D-Flange, Footless

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HES1-36-143TDRD	1	143TD	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	69	55
HES1-18-143TDRD	1	143TD	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	56	55
HES1-12-145TDRD	1	145TD	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	55
HES1.5-36-143TDRD	1.5	143TD	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	69	55
HES1.5-18-145TDRD	1.5	145TD	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	56	55
HES1.5-12-182TDRD	1.5	182TD	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	55	105
HES2-36-145TDRD	2	145TD	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	69	55
HES2-18-145TDRD	2	145TD	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	56	55
HES2-12-184TDRD	2	184TD	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	55	105
HES3-36-182TDRD	3	182TD	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	72	105
HES3-18-182TDRD	3	182TD	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	60	105
HES3-12-213TDRD	3	213TD	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	57	150
HES5-36-184TDRD	5	184TD	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	72	105
HES5-18-184TDRD	5	184TD	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	60	105
HES5-12-215TDRD	5	215TD	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	57	175
HES7.5-36-213TDRD	7.5	213TD	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	73	150
HES7.5-18-213TDRD	7.5	213TD	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	62	150
HES7.5-12-254TDRD	7.5	254TD	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	240
HES10-36-215TDRD	10	215TD	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	73	175
HES10-18-215TDRD	10	215TD	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	62	175
HES10-12-256TDRD	10	256TD	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	290
HES15-36-254TDRD	15	254TD	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	77	240
HES15-18-254TDRD	15	254TD	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	70	240
HES15-12-284TDRD	15	284TD	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	65	360
HES20-36-256TDRD	20	256TD	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	77	290
HES20-18-256TDRD	20	256TD	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	70	290
HES20-12-286TDRD	20	286TD	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	65	410
HES25-36-284TSDRD	25	284TSD	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	80	360
HES25-18-284TDRD	25	284TD	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	72	360
HES25-12-324TDRD	25	324TD	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	68	550
HES30-36-286TSDRD	30	286TSD	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	80	410
HES30-18-286TDRD	30	286TD	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	72	410
HES30-12-326TDRD	30	326TD	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	68	560
HES40-36-324TSDRD	40	324TSD	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	82	550
HES40-18-324TDRD	40	324TD	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	74	550
HHI40-12-364TDRD	40	364TD	1185	230/460	94.1	0.82	97.6/48.8	680	178.36	150	220	73	780
HES50-36-326TSDRD	50	326TSD	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	82	560
HES50-18-326TDRD	50	326TD	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	74	560
HHI50-12-365TDRD	50	365TD	1185	230/460	94.1	0.82	120.4/60.2	680	219.98	150	220	73	820
HHI60-36-364TSDRD	60	364TSD	3570	230/460	94.1	0.92	131.2/65.6	680	88.81	140	220	82	780
HHI60-18-364TDRD	60	364TD	1780	230/460	95.0	0.85	139.9/69.9	670	178.11	150	220	82	780
HHI60-12-404TDRD	60	404TD	1185	230/460	94.5	0.84	142.3/71.2	670	267.54	140	220	75	1120
HHI75-36-365TSDRD	75	365TSD	3570	230/460	94.5	0.92	159.7/79.8	680	108.54	140	220	82	820
HHI75-18-365TDRD	75	365TD	1780	230/460	95.4	0.85	170.3/85.1	690	217.69	150	220	82	820
HHI75-12-405TDRD	75	405TD	1185	230/460	94.5	0.84	173.9/87	680	326.99	140	220	75	1120
HHI100-36-405TSDRD	100	405TSD	3570	230/460	94.5	0.91	220.1/110.1	700	148.01	120	220	87	1120
HHI100-18-405TDRD	100	405TD	1780	230/460	95.4	0.87	228.1/114.1	650	296.85	140	220	82	1120
HHI100-12-444TDRD	100	444TD	1185	230/460	95	0.85	233.1/116.6	680	445.90	140	220	80	1530
HHI125-36-444TSDRD	125	444TSD	3570	230/460	95	0.90	278.9/139.5	700	187.48	120	220	92	1610
HHI125-18-444TDRD	125	444TD	1785	230/460	95.4	0.88	284.1/142	700	374.96	140	220	85	1530
HHI125-12-445TDRD	125	445TD	1185	230/460	95	0.85	295.3/147.7	675	564.81	140	220	80	1640
HHI150-36-445TSDRD	150	445TSD	3570	460	95	0.90	323/161.5	700	217.08	120	220	92	1770
HHI150-18-445TDRD	150	445TD	1785	460	95.8	0.88	327.5/163.8	700	434.16	140	220	85	1640
HHI150-12-447TDRD	150	447TD	1185	460	95.8	0.85	339.1/169.5	680	653.99	140	220	80	1860
HHI200-36-447TSDRD	200	447TSD	3570	460	95.4	0.90	438.5/219.3	700	296.02	120	220	92	1900
HHI200-18-447TDRD	200	447TD	1785	460	96.2	0.88	444.8/222.4	700	592.04	140	220	85	1860
HHI200-12-449TDRD	200	449TD	1185	460	95.8	0.85	462.4/231.2	680	891.80	140	220	80	2430
HHI250-36-449TSDRD	250	449TSD	3570	460	95.8	0.90	553.2/276.6	700	374.96	120	220	92	2430
HHI250-18-449TDRD	250	449TD	1785	460	96.2	0.88	563.4/281.7	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

HES, HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, Vertical, C-Face, Footless



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~ 125 HP), 460 V (150 HP ~)
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

Vertical, C-Face, Footless

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HES1-36-143TCRDV	1	143TC	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	69	55
HES1-18-143TCRDV	1	143TC	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	56	55
HES1-12-145TCRDV	1	145TC	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	55
HES1.5-36-143TCRDV	1.5	143TC	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	69	55
HES1.5-18-145TCRDV	1.5	145TC	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	56	55
HES1.5-12-182TCRDV	1.5	182TC	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	55	105
HES2-36-145TCRDV	2	145TC	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	69	55
HES2-18-145TCRDV	2	145TC	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	56	55
HES2-12-184TCRDV	2	184TC	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	55	105
HES3-36-182TCRDV	3	182TC	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	72	105
HES3-18-182TCRDV	3	182TC	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	60	105
HES3-12-213TCRDV	3	213TC	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	57	150
HES5-36-184TCRDV	5	184TC	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	72	105
HES5-18-184TCRDV	5	184TC	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	60	105
HES5-12-215TCRDV	5	215TC	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	57	175
HES7.5-36-213TCRDV	7.5	213TC	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	73	150
HES7.5-18-213TCRDV	7.5	213TC	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	62	150
HES7.5-12-254TCRDV	7.5	254TC	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	240
HES10-36-215TCRDV	10	215TC	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	73	175
HES10-18-215TCRDV	10	215TC	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	62	175
HES10-12-256TCRDV	10	256TC	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	290
HES15-36-254TCRDV	15	254TC	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	77	240
HES15-18-254TCRDV	15	254TC	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	70	240
HES15-12-284TCRDV	15	284TC	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	65	360
HES20-36-256TCRDV	20	256TC	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	77	290
HES20-18-256TCRDV	20	256TC	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	70	290
HES20-12-286TCRDV	20	286TC	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	65	410
HES25-36-284TSCRDV	25	284TSC	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	80	360
HES25-18-284TSCRDV	25	284TC	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	72	360
HES25-12-324TSCRDV	25	324TC	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	68	550
HES30-36-286TSCRDV	30	286TSC	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	80	410
HES30-18-286TSCRDV	30	286TC	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	72	410
HES30-12-326TSCRDV	30	326TC	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	68	560
HES40-36-324TSCRDV	40	324TSC	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	82	550
HES40-18-324TSCRDV	40	324TC	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	74	550
HHI40-12-364TCRDV	40	364TC	1185	230/460	94.1	0.82	97.6/48.8	680	178.36	150	220	73	780
HES50-36-326TSCRDV	50	326TSC	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	82	560
HES50-18-326TSCRDV	50	326TC	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	74	560
HHI50-12-365TSCRDV	50	365TC	1185	230/460	94.1	0.82	120.4/60.2	680	219.98	150	220	73	820
HHI60-36-364TSCRDV	60	364TSC	3570	230/460	94.1	0.92	131.2/65.6	680	88.81	140	220	82	780
HHI60-18-364TSCRDV	60	364TC	1780	230/460	95.0	0.85	139.9/69.9	670	178.11	150	220	82	780
HHI60-12-404TSCRDV	60	404TC	1185	230/460	94.5	0.84	142.3/71.2	670	267.54	140	220	75	1120
HHI75-36-365TSCRDV	75	365TSC	3570	230/460	94.5	0.92	159.7/79.8	680	108.54	140	220	82	820
HHI75-18-365TSCRDV	75	365TC	1780	230/460	95.4	0.85	170.3/85.1	690	217.69	150	220	82	820
HHI75-12-405TSCRDV	75	405TC	1185	230/460	94.5	0.84	173.9/87	680	326.99	140	220	75	1120
HHI100-36-405TSCRDV	100	405TSC	3570	230/460	94.5	0.91	220.1/110.1	700	148.01	120	220	87	1120
HHI100-18-405TSCRDV	100	405TC	1780	230/460	95.4	0.87	228.1/114.1	650	296.85	140	220	82	1120
HHI100-12-444TSCRDV	100	444TC	1185	230/460	95	0.85	233.1/116.6	680	445.90	140	220	80	1530
HHI125-36-444TSCRDV	125	444TSC	3570	230/460	95	0.90	278.9/139.5	700	187.48	120	220	92	1610
HHI125-18-444TSCRDV	125	444TC	1785	230/460	95.4	0.88	284.1/142	700	374.96	140	220	85	1530
HHI125-12-445TSCRDV	125	445TC	1185	230/460	95	0.85	295.3/147.7	675	564.81	140	220	80	1640
HHI150-36-445TSCRDV	150	445TSC	3570	460	95	0.90	323/161.5	700	217.08	120	220	92	1770
HHI150-18-445TSCRDV	150	445TC	1785	460	95.8	0.88	327.5/163.8	700	434.16	140	220	85	1640
HHI150-12-447TSCRDV	150	447TC	1185	460	95.8	0.85	339.1/169.5	680	653.99	140	220	80	1860
HHI200-36-447TSCRDV	200	447TSC	3570	460	95.4	0.90	438.5/219.3	700	296.02	120	220	92	1900
HHI200-18-447TSCRDV	200	447TC	1785	460	96.2	0.88	444.8/222.4	700	592.04	140	220	85	1860
HHI200-12-449TSCRDV	200	449TC	1185	460	95.8	0.85	462.4/231.2	680	891.80	140	220	80	2430
HHI250-36-449TSCRDV	250	449TSC	3570	460	95.8	0.90	553.2/276.6	700	374.96	120	220	92	2430
HHI250-18-449TSCRDV	250	449TC	1785	460	96.2	0.88	563.4/281.7	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

Severe duty Features HES/HHI Model
Severe duty Features HSDE Model
IEEE841 Features HL Model
IEEE841 Features XL Model
Explosion proof Features DXHHI Model
Severe duty Performances HES/HHI Model
Severe duty Performances HSDE Model
IEEE841 Performances HL Model
IEEE841 Performances XL Model
Explosion proof Performances DXHHI Model
Severe duty Dimensions HES/HHI Model
Severe duty Dimensions HSDE Model
IEEE841 Dimensions HL Model
IEEE841 Dimensions XL Model
Explosion proof Dimensions DXHHI Model

HES, HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, Vertical, D-Flange, Footless



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~ 125 HP), 460 V (150 HP ~)
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

Vertical, D-Flange, Footless

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
HES1-36-143TDRDV	1	143TD	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	69	55
HES1-18-143TDRDV	1	143TD	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	56	55
HES1-12-145TDRDV	1	145TD	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	55
HES1.5-36-143TDRDV	1.5	143TD	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	69	55
HES1.5-18-145TDRDV	1.5	145TD	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	56	55
HES1.5-12-182TDRDV	1.5	182TD	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	55	105
HES2-36-145TDRDV	2	145TD	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	69	55
HES2-18-145TDRDV	2	145TD	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	56	55
HES2-12-184TDRDV	2	184TD	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	55	105
HES3-36-182TDRDV	3	182TD	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	72	105
HES3-18-182TDRDV	3	182TD	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	60	105
HES3-12-213TDRDV	3	213TD	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	57	150
HES5-36-184TDRDV	5	184TD	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	72	105
HES5-18-184TDRDV	5	184TD	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	60	105
HES5-12-215TDRDV	5	215TD	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	57	175
HES7.5-36-213TDRDV	7.5	213TD	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	73	150
HES7.5-18-213TDRDV	7.5	213TD	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	62	150
HES7.5-12-254TDRDV	7.5	254TD	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	240
HES10-36-215TDRDV	10	215TD	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	73	175
HES10-18-215TDRDV	10	215TD	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	62	175
HES10-12-256TDRDV	10	256TD	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	290
HES15-36-254TDRDV	15	254TD	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	77	240
HES15-18-254TDRDV	15	254TD	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	70	240
HES15-12-284TDRDV	15	284TD	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	65	360
HES20-36-256TDRDV	20	256TD	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	77	290
HES20-18-256TDRDV	20	256TD	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	70	290
HES20-12-286TDRDV	20	286TD	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	65	410
HES25-36-284TSDRDV	25	284TSD	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	80	360
HES25-18-284TDRDV	25	284TD	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	72	360
HES25-12-324TDRDV	25	324TD	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	68	550
HES30-36-286TSDRDV	30	286TSD	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	80	410
HES30-18-286TDRDV	30	286TD	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	72	410
HES30-12-326TDRDV	30	326TD	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	68	560
HES40-36-324TSDRDV	40	324TSD	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	82	550
HES40-18-324TDRDV	40	324TD	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	74	550
HHI40-12-364TDRDV	40	364TD	1185	230/460	94.1	0.82	97.6/48.8	680	178.36	150	220	73	780
HES50-36-326TSDRDV	50	326TSD	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	82	560
HES50-18-326TDRDV	50	326TD	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	74	560
HHI50-12-365TDRDV	50	365TD	1185	230/460	94.1	0.82	120.4/60.2	680	219.98	150	220	73	820
HHI60-36-364TSDRDV	60	364TSD	3570	230/460	94.1	0.92	131.2/65.6	680	88.81	140	220	82	780
HHI60-18-364TDRDV	60	364TD	1780	230/460	95.0	0.85	139.9/69.9	670	178.11	150	220	82	780
HHI60-12-404TDRDV	60	404TD	1185	230/460	94.5	0.84	142.3/71.2	670	267.54	140	220	75	1120
HHI75-36-365TSDRDV	75	365TSD	3570	230/460	94.5	0.92	159.7/79.8	680	108.54	140	220	82	820
HHI75-18-365TDRDV	75	365TD	1780	230/460	95.4	0.85	170.3/85.1	690	217.69	150	220	82	820
HHI75-12-405TDRDV	75	405TD	1185	230/460	94.5	0.84	173.9/87	680	326.99	140	220	75	1120
HHI100-36-405TSDRDV	100	405TSD	3570	230/460	94.5	0.91	220.1/110.1	700	148.01	120	220	87	1120
HHI100-18-405TDRDV	100	405TD	1780	230/460	95.4	0.87	228.1/114.1	650	296.85	140	220	82	1120
HHI100-12-444TDRDV	100	444TD	1185	230/460	95	0.85	233.1/116.6	680	445.90	140	220	80	1530
HHI125-36-444TSDRDV	125	444TSD	3570	230/460	95	0.90	278.9/139.5	700	187.48	120	220	92	1610
HHI125-18-444TDRDV	125	444TD	1785	230/460	95.4	0.88	284.1/142	700	374.96	140	220	85	1530
HHI125-12-445TDRDV	125	445TD	1185	230/460	95	0.85	295.3/147.7	675	564.81	140	220	80	1640
HHI150-36-445TSDRDV	150	445TSD	3570	460	95	0.90	323/161.5	700	217.08	120	220	92	1770
HHI150-18-445TDRDV	150	445TD	1785	460	95.8	0.88	327.5/163.8	700	434.16	140	220	85	1640
HHI150-12-447TDRDV	150	447TD	1185	460	95.8	0.85	339.1/169.5	680	653.99	140	220	80	1860
HHI200-36-447TSDRDV	200	447TSD	3570	460	95.4	0.90	438.5/219.3	700	296.02	120	220	92	1900
HHI200-18-447TDRDV	200	447TD	1785	460	96.2	0.88	444.8/222.4	700	592.04	140	220	85	1860
HHI200-12-449TDRDV	200	449TD	1185	460	95.8	0.85	462.4/231.2	680	891.80	140	220	80	2430
HHI250-36-449TSDRDV	250	449TSD	3570	460	95.8	0.90	553.2/276.6	700	374.96	120	220	92	2430
HHI250-18-449TDRDV	250	449TD	1785	460	96.2	0.88	563.4/281.7	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, Foot mounted



Features


- Insulation Class F, Temperature rise B, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Protech seal
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

Foot Mounted

Catalog Number	HP	Frame Number	RPM (SPEED)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE1-36-143T	1	143T	3490	460	77.0	0.82	1.49	830	1.51	200	270	69	53
IEEE1-18-143T	1	143T	1755	460	85.5	0.70	1.57	930	3.01	280	310	56	53
IEEE1-12-145T	1	145T	1155	460	82.5	0.63	1.81	800	4.57	180	275	55	55
IEEE1.5-36-143T	1.5	143T	3485	460	84.0	0.84	1.96	1000	2.22	185	260	69	53
IEEE1.5-18-145T	1.5	145T	1750	460	86.5	0.72	2.22	900	4.43	260	290	56	55
IEEE1.5-12-182T	1.5	182T	1175	460	87.5	0.61	2.59	770	6.60	190	270	55	105
IEEE2-36-145T	2	145T	3480	460	85.5	0.85	2.59	950	3.04	180	250	69	55
IEEE2-18-145T	2	145T	1745	460	86.5	0.73	2.98	830	6.06	245	280	56	55
IEEE2-12-184T	2	184T	1175	460	88.5	0.68	3.13	790	8.99	180	260	55	105
IEEE3-36-182T	3	182T	3520	460	86.5	0.85	3.76	760	4.40	190	260	72	105
IEEE3-18-182T	3	182T	1770	460	89.5	0.79	3.91	930	8.76	220	280	60	105
IEEE3-12-213T	3	213T	1185	460	89.5	0.67	4.60	770	13.08	180	250	57	150
IEEE5-36-184T	5	184T	3515	460	88.5	0.86	6.10	800	7.42	190	260	72	105
IEEE5-18-184T	5	184T	1760	460	89.5	0.80	6.49	840	14.81	210	260	60	105
IEEE5-12-215T	5	215T	1180	460	89.5	0.68	7.63	680	22.09	170	220	57	175
IEEE7.5-36-213T	7.5	213T	3530	460	89.5	0.85	9.07	700	10.98	160	260	73	150
IEEE7.5-18-213T	7.5	213T	1775	460	91.7	0.77	9.78	940	21.83	190	250	62	150
IEEE7.5-12-254T	7.5	254T	1175	460	91.0	0.75	10.11	640	32.98	170	250	64	240
IEEE10-36-215T	10	215T	3525	460	90.2	0.86	12.13	680	14.99	160	260	73	175
IEEE10-18-215T	10	215T	1770	460	91.7	0.79	12.99	750	29.85	180	240	62	175
IEEE10-12-256T	10	256T	1175	460	91.0	0.75	13.79	680	44.97	170	250	64	290
IEEE15-36-254T	15	254T	3550	460	91.0	0.88	17.24	710	21.83	150	250	77	240
IEEE15-18-254T	15	254T	1775	460	92.4	0.82	18.22	750	43.66	200	240	70	240
IEEE15-12-284T	15	284T	1175	460	91.7	0.77	19.55	600	65.95	155	240	65	360
IEEE20-36-256T	20	256T	3550	460	91.0	0.89	23.25	740	29.77	150	250	77	290
IEEE20-18-256T	20	256T	1775	460	93.0	0.82	24.84	800	59.53	200	240	70	290
IEEE20-12-286T	20	286T	1175	460	91.7	0.77	26.66	650	89.94	150	230	65	410
IEEE25-36-284TS	25	284TS	3560	460	91.7	0.89	28.45	670	36.61	160	230	80	360
IEEE25-18-284T	25	284T	1775	460	93.6	0.81	30.63	790	73.43	170	220	72	360
IEEE25-12-324T	25	324T	1175	460	93.0	0.80	31.21	720	110.92	170	210	68	550
IEEE30-36-286TS	30	286TS	3560	460	91.7	0.89	33.83	685	43.54	160	230	80	410
IEEE30-18-286T	30	286T	1775	460	93.6	0.81	36.42	740	87.32	170	220	72	410
IEEE30-12-326T	30	326T	1175	460	93.0	0.80	37.11	830	131.91	170	210	68	560
IEEE40-36-324TS	40	324TS	3560	460	92.4	0.92	44.54	850	59.37	150	230	82	550
IEEE40-18-324T	40	324T	1780	460	94.1	0.82	48.80	850	118.74	170	220	74	550
IEEE40-12-364T	40	364T	1185	460	94.1	0.82	48.80	680	178.36	150	220	73	780
IEEE50-36-326TS	50	326TS	3560	460	93.0	0.92	54.57	850	73.22	150	230	82	560
IEEE50-18-326T	50	326T	1780	460	94.5	0.84	58.50	830	146.44	170	220	74	560
IEEE50-12-365T	50	365T	1185	460	94.1	0.82	60.18	680	219.98	150	220	73	820
IEEE60-36-364TS	60	364TS	3570	460	94.1	0.92	65.60	680	88.81	140	220	82	780
IEEE60-18-364T	60	364T	1780	460	95.0	0.85	69.94	670	178.11	150	220	82	780
IEEE60-12-404T	60	404T	1185	460	94.5	0.84	71.15	670	267.54	140	220	75	1120
IEEE75-36-365TS	75	365TS	3570	460	94.5	0.92	79.83	680	108.54	140	220	82	820
IEEE75-18-365T	75	365T	1780	460	95.4	0.85	85.13	690	217.69	150	220	82	820
IEEE75-12-405T	75	405T	1185	460	94.5	0.84	86.96	680	326.99	140	220	75	1120
IEEE100-36-405TS	100	405TS	3570	460	94.5	0.91	110.07	700	148.01	120	220	85	1120
IEEE100-18-405T	100	405T	1780	460	95.4	0.87	114.07	650	296.85	140	220	82	1120
IEEE100-12-444T	100	444T	1185	460	95	0.85	116.57	680	445.90	140	220	80	1530
IEEE125-36-444TS	125	444TS	3570	460	95	0.90	139.46	700	187.48	120	220	85	1610
IEEE125-18-444T	125	444T	1785	460	95.4	0.88	142.03	700	374.96	140	220	85	1530
IEEE125-12-445T	125	445T	1185	460	95	0.85	147.66	675	564.81	140	220	80	1640
IEEE150-36-445TS	150	445TS	3570	460	95	0.90	161.48	700	217.08	120	220	85	1770
IEEE150-18-445T	150	445T	1785	460	95.8	0.88	163.77	700	434.16	140	220	85	1640
IEEE150-12-447T	150	447T	1185	460	95.8	0.85	169.55	680	653.99	140	220	80	1860
IEEE200-36-447TS	200	447TS	3570	460	95.4	0.90	219.27	700	296.02	120	220	85	1900
IEEE200-18-447T	200	447T	1785	460	96.2	0.88	222.39	700	592.04	140	220	85	1860
IEEE200-12-449T	200	449T	1185	460	95.8	0.85	231.20	680	891.80	140	220	80	2430
IEEE250-36-449TS	250	449TS	3570	460	95.8	0.90	276.58	700	374.96	120	220	85	2430
IEEE250-18-449T	250	449T	1785	460	96.2	0.88	281.69	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

IEEE XL Model - IEEE841, Large motor Three phase, TEFC, Foot mounted



Features

- Insulation Class F, Temperature rise B or F, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- Labyrinth seal (at 3600 RPM Motor),
Protech seal (at 1800, 1200 RPM Motor)
- WTD PT 100 Ohm 2 EA/Phase
- BTD PT 100 Ohm 1 EA/Bearing
- Heater 1 EA/Motor
- Auxiliary Terminal Box 2 EA/Motor
- Tap provision for Vib. sensor (Except Vib. sensor)

Catalog Number Suffix

- BB : Ball Bearing
- IB : Insulation Bearing on N-DE
- 2IB : Insulation Bearing on DE & N-DE
- BR : Bearing RTDs (1 EA/Bearing) with Aux. T/box
- SR : Stator RTDs (2 EA/Ph.) with Aux. T/box
- SH : Space Heater (1 EA/Motor) with Aux. T/box
- SP : Spare part (Spare cooling fan)
- LL : Long lead cable
- F : Temp. rise F (Standard Temp. rise B at Ambient temp. 40 °C)

Foot Mounted

Catalog Number	HP	Frame Number	RPM (SPEED)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE250-12-L449T-IBBRSRSH	250	L449T	1185	460	95.8	0.84	296.3	680	1129.6	135	200	80	2890
IEEE300-36-L449TS-IBBRSRSHSP	300	L449TS	3570	460	95.8	0.90	327.5	700	444.0	130	225	87	2890
IEEE300-18-L449T-IBBRSRSH	300	L449T	1785	460	96.2	0.88	333.6	710	888.1	135	225	85	2890
IEEE300-12-L449T-IBBRSRSH	300	L449T	1185	460	95.8	0.84	350.9	675	1337.7	135	220	80	3320
IEEE350-36-L449TS-IBBRSRSHSP	350	L449TS	3570	460	95.8	0.90	378.5	700	513.1	130	225	87	3090
IEEE350-18-L449T-IBBRSRSH	350	L449T	1785	460	96.2	0.88	385.5	715	1026.2	135	225	85	3090
IEEE350-12-L449T-IBBRSRSH	350	L449T	1185	460	95.8	0.84	407.1	650	1551.7	120	200	80	3380
IEEE400-36-L449TS-IBBRSRSHSP	400	L449TS	3570	460	95.8	0.90	436.7	680	592.0	145	240	87	3820
IEEE400-18-L449T-IBBRSRSH	400	L449T	1785	460	96.2	0.88	444.8	710	1184.1	135	225	85	3620
IEEE400-12-5009-IBBRSRSH	400	5009	1185	460	95.8	0.84	467.9	680	1783.6	135	220	84	3970
IEEE450-36-5009S-IBBRSRSHSP	450	5009S	3570	460	95.8	0.90	487.7	725	661.1	130	230	87	3860
IEEE450-18-5009-IBBRSRSH	450	5009	1785	460	96.2	0.89	491.1	720	1322.2	135	230	85	3970
IEEE450-12-5009-IBBRSRSH	450	5009	1185	460	95.8	0.84	522.5	675	1991.7	135	220	84	4030
IEEE500-36-5010S-IBBRSRSHSP	500	5010S	3570	460	95.8	0.90	545.9	725	740.0	145	240	87	4800
IEEE500-18-5010-IBBRSRSH	500	5010	1785	460	96.2	0.89	549.7	720	1480.1	135	220	85	4820
IEEE500-12-5011-IBBRSRSH	500	5011	1185	460	95.8	0.84	584.9	675	2229.5	135	220	84	4850
IEEE600-18-5011-IBBRSRSH	600	5011	1785	460	96.2	0.89	659.7	720	1776.1	135	230	85	4940
IEEE600-36-5812S-IBBRSRSHSP	600	5812S	3570	460	95.8	0.89	662.4	670	888.1	150	250	89	6730
IEEE600-12-5812-IBBRSRSH-F	600	5812	1185	460	95.8	0.84	701.9	675	2675.4	135	220	85	6019
IEEE700-36-5812S-IBBRSRSHSP	700	5812S	3570	460	95.8	0.89	768.4	720	1030.1	150	250	89	6730
IEEE700-18-5812-IBBRSRSH	700	5812	1785	460	96.2	0.88	771.0	650	2052.4	120	220	87	7174
IEEE750-36-5812S-IBBRSRSHSP	750	5812S	3570	460	95.8	0.89	824.4	710	1105.1	150	250	89	6730
IEEE800-36-5812S-IBBRSRSHSP	800	5812S	3570	460	95.8	0.89	883.2	650	1184.1	130	240	89	6730
IEEE900-36-5812S-IBBRSRSHSP-F	900	5812S	3570	460	95.8	0.89	987.8	700	1324.2	150	250	89	7130
IEEE250-12-L449T-IBSH	250	L449T	1185	460	95.8	0.84	296.3	680	1129.6	135	200	80	2890
IEEE300-36-L449TS-IBSHSP	300	L449TS	3570	460	95.8	0.90	327.5	700	444.0	130	225	87	2890
IEEE300-18-L449T-IBSH	300	L449T	1785	460	96.2	0.88	333.6	710	888.1	135	225	85	2890
IEEE300-12-L449T-IBSH	300	L449T	1185	460	95.8	0.84	350.9	675	1337.7	135	220	80	3320
IEEE350-36-L449TS-IBSHSP	350	L449TS	3570	460	95.8	0.90	378.5	700	513.1	130	225	87	3090
IEEE350-18-L449T-IBSH	350	L449T	1785	460	96.2	0.88	385.5	715	1026.2	135	225	85	3090
IEEE350-12-L449T-IBSH	350	L449T	1185	460	95.8	0.84	407.1	650	1551.7	120	200	80	3380
IEEE400-36-L449TS-IBSHSP	400	L449TS	3570	460	95.8	0.90	436.7	680	592.0	145	240	87	3820
IEEE400-18-L449T-IBSH	400	L449T	1785	460	96.2	0.88	444.8	710	1184.1	135	225	85	3620
IEEE400-12-5009-IBSH	400	5009	1185	460	95.8	0.84	467.9	680	1783.6	135	220	84	3970
IEEE450-36-5009S-IBSHSP	450	5009S	3570	460	95.8	0.90	487.7	725	661.1	130	230	87	3860
IEEE450-18-5009-IBSH	450	5009	1785	460	96.2	0.89	491.1	720	1322.2	135	230	85	3970
IEEE450-12-5009-IBSH	450	5009	1185	460	95.8	0.84	522.5	675	1991.7	135	220	84	4030
IEEE500-36-5010S-IBSHSP	500	5010S	3570	460	95.8	0.90	545.9	725	740.0	145	240	87	4800
IEEE500-18-5010-IBSH	500	5010	1785	460	96.2	0.89	549.7	720	1480.1	135	220	85	4820
IEEE500-12-5011-IBSH	500	5011	1185	460	95.8	0.84	584.9	675	2229.5	135	220	84	4850
IEEE600-18-5011-IBSH	600	5011	1785	460	96.2	0.89	659.7	720	1776.1	135	230	85	4940
IEEE600-36-5812S-IBSHSP	600	5812S	3570	460	95.8	0.89	662.4	670	888.1	150	250	89	6730
IEEE600-12-5812-IBSH-F	600	5812	1185	460	95.8	0.84	701.9	675	2675.4	135	220	85	6019
IEEE700-36-5812S-IBSHSP	700	5812S	3570	460	95.8	0.89	768.4	720	1030.1	150	250	89	6730
IEEE700-18-5812-IBSH	700	5812	1785	460	96.2	0.88	771.0	650	2052.4	120	220	87	7174
IEEE750-36-5812S-IBSHSP	750	5812S	3570	460	95.8	0.89	824.4	710	1105.1	150	250	89	6730
IEEE800-36-5812S-IBSHSP	800	5812S	3570	460	95.8	0.89	883.2	650	1184.1	130	240	89	6730
IEEE900-36-5812S-IBSHSP-F	900	5812S	3570	460	95.8	0.89	987.8	700	1324.2	150	250	89	7130

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

※ Remarks

1. Applicable to Each single of accessory (Ex. IB, SH, IBSH & etc.)
2. Standard temperature rise B for HSDE Model (Except 900 HP Motor)
3. Motor power(HP) for HSDE model : Up to 900 HP

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, C-face, Foot mounted



Features


- Insulation Class F, Temperature rise B, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Protech seal
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

C-Face, Foot Mounted

Catalog Number	HP	Frame Number	RPM (SPEED)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE1-36-143TC	1	143TC	3490	460	77.0	0.82	1.49	830	1.51	200	270	69	53
IEEE1-18-143TC	1	143TC	1755	460	85.5	0.70	1.57	930	3.01	280	310	56	53
IEEE1-12-145TC	1	145TC	1155	460	82.5	0.63	1.81	800	4.57	180	275	55	55
IEEE1.5-36-143TC	1.5	143TC	3485	460	84.0	0.84	1.96	1000	2.22	185	260	69	53
IEEE1.5-18-145TC	1.5	145TC	1750	460	86.5	0.72	2.22	900	4.43	260	290	56	55
IEEE1.5-12-182TC	1.5	182TC	1175	460	87.5	0.61	2.59	770	6.60	190	270	55	105
IEEE2-36-145TC	2	145TC	3480	460	85.5	0.85	2.59	950	3.04	180	250	69	55
IEEE2-18-145TC	2	145TC	1745	460	86.5	0.73	2.98	830	6.06	245	280	56	55
IEEE2-12-184TC	2	184TC	1175	460	88.5	0.68	3.13	790	8.99	180	260	55	105
IEEE3-36-182TC	3	182TC	3520	460	86.5	0.85	3.76	760	4.40	190	260	72	105
IEEE3-18-182TC	3	182TC	1770	460	89.5	0.79	3.91	930	8.76	220	280	60	105
IEEE3-12-213TC	3	213TC	1185	460	89.5	0.67	4.60	770	13.08	180	250	57	150
IEEE5-36-184TC	5	184TC	3515	460	88.5	0.86	6.10	800	7.42	190	260	72	105
IEEE5-18-184TC	5	184TC	1760	460	89.5	0.80	6.49	840	14.81	210	260	60	105
IEEE5-12-215TC	5	215TC	1180	460	89.5	0.68	7.63	680	22.09	170	220	57	175
IEEE7.5-36-213TC	7.5	213TC	3530	460	89.5	0.85	9.07	700	10.98	160	260	73	150
IEEE7.5-18-213TC	7.5	213TC	1775	460	91.7	0.77	9.78	940	21.83	190	250	62	150
IEEE7.5-12-254TC	7.5	254TC	1175	460	91.0	0.75	10.11	640	32.98	170	250	64	240
IEEE10-36-215TC	10	215TC	3525	460	90.2	0.86	12.13	680	14.99	160	260	73	175
IEEE10-18-215TC	10	215TC	1770	460	91.7	0.79	12.99	750	29.85	180	240	62	175
IEEE10-12-256TC	10	256TC	1175	460	91.0	0.75	13.79	680	44.97	170	250	64	290
IEEE15-36-254TC	15	254TC	3550	460	91.0	0.88	17.24	710	21.83	150	250	77	240
IEEE15-18-254TC	15	254TC	1775	460	92.4	0.82	18.22	750	43.66	200	240	70	240
IEEE15-12-284TC	15	284TC	1175	460	91.7	0.77	19.55	600	65.95	155	240	65	360
IEEE20-36-256TC	20	256TC	3550	460	91.0	0.89	23.25	740	29.77	150	250	77	290
IEEE20-18-256TC	20	256TC	1775	460	93.0	0.82	24.84	800	59.53	200	240	70	290
IEEE20-12-286TC	20	286TC	1175	460	91.7	0.77	26.66	650	89.94	150	230	65	410
IEEE25-36-284TSC	25	284TSC	3560	460	91.7	0.89	28.45	670	36.61	160	230	80	360
IEEE25-18-284TC	25	284TC	1775	460	93.6	0.81	30.63	790	73.43	170	220	72	360
IEEE25-12-324TC	25	324TC	1175	460	93.0	0.80	31.21	720	110.92	170	210	68	550
IEEE30-36-286TSC	30	286TSC	3560	460	91.7	0.89	33.83	685	43.54	160	230	80	410
IEEE30-18-286TC	30	286TC	1775	460	93.6	0.81	36.42	740	87.32	170	220	72	410
IEEE30-12-326TC	30	326TC	1175	460	93.0	0.80	37.11	830	131.91	170	210	68	560
IEEE40-36-324TSC	40	324TSC	3560	460	92.4	0.92	44.54	850	59.37	150	230	82	550
IEEE40-18-324TC	40	324TC	1780	460	94.1	0.82	48.80	850	118.74	170	220	74	550
IEEE40-12-364TC	40	364TC	1185	460	94.1	0.82	48.80	680	178.36	150	220	73	780
IEEE50-36-326TSC	50	326TSC	3560	460	93.0	0.92	54.57	850	73.22	150	230	82	560
IEEE50-18-326TC	50	326TC	1780	460	94.5	0.84	58.50	830	146.44	170	220	74	560
IEEE50-12-365TC	50	365TC	1185	460	94.1	0.82	60.18	680	219.98	150	220	73	820
IEEE60-36-364TSC	60	364TSC	3570	460	94.1	0.92	65.60	680	88.81	140	220	82	780
IEEE60-18-364TC	60	364TC	1780	460	95.0	0.85	69.94	670	178.11	150	220	82	780
IEEE60-12-404TC	60	404TC	1185	460	94.5	0.84	71.15	670	267.54	140	220	75	1120
IEEE75-36-365TSC	75	365TSC	3570	460	94.5	0.92	79.83	680	108.54	140	220	82	820
IEEE75-18-365TC	75	365TC	1780	460	95.4	0.85	85.13	690	217.69	150	220	82	820
IEEE75-12-405TC	75	405TC	1185	460	94.5	0.84	86.96	680	326.99	140	220	75	1120
IEEE100-36-405TSC	100	405TSC	3570	460	94.5	0.91	110.07	700	148.01	120	220	85	1120
IEEE100-18-405TC	100	405TC	1780	460	95.4	0.87	114.07	650	296.85	140	220	82	1120
IEEE100-12-444TC	100	444TC	1185	460	95	0.85	116.57	680	445.90	140	220	80	1530
IEEE125-36-444TSC	125	444TSC	3570	460	95	0.90	139.46	700	187.48	120	220	85	1610
IEEE125-18-444TC	125	444TC	1785	460	95.4	0.88	142.03	700	374.96	140	220	85	1530
IEEE125-12-445TC	125	445TC	1185	460	95	0.85	147.66	675	564.81	140	220	80	1640
IEEE150-36-445TSC	150	445TSC	3570	460	95	0.90	161.48	700	217.08	120	220	85	1770
IEEE150-18-445TC	150	445TC	1785	460	95.8	0.88	163.77	700	434.16	140	220	85	1640
IEEE150-12-447TC	150	447TC	1185	460	95.8	0.85	169.55	680	653.99	140	220	80	1860
IEEE200-36-447TSC	200	447TSC	3570	460	95.4	0.90	219.27	700	296.02	120	220	85	1900
IEEE200-18-447TC	200	447TC	1785	460	96.2	0.88	222.39	700	592.04	140	220	85	1860
IEEE200-12-449TC	200	449TC	1185	460	95.8	0.85	231.20	680	891.80	140	220	80	2430
IEEE250-36-449TSC	250	449TSC	3570	460	95.8	0.90	276.58	700	374.96	120	220	85	2430
IEEE250-18-449TC	250	449TC	1785	460	96.2	0.88	281.69	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

IEEE XL Model - IEEE841, Large motor Three phase, TEFC, C-face, Foot mounted



Features

- Insulation Class F, Temperature rise B or F, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- Labyrinth seal (at 3600 RPM Motor),
Protech seal (at 1800, 1200 RPM Motor)
- WTD PT 100 Ohm 2 EA/Phase
- BTD PT 100 Ohm 1 EA/Bearing
- Heater 1 EA/Motor
- Auxiliary Terminal Box 2 EA/Motor
- Tap provision for Vib. sensor (Except Vib. sensor)

Catalog Number Suffix

- BB : Ball Bearing
- IB : Insulation Bearing on N-DE
- 2IB : Insulation Bearing on DE & N-DE
- BR : Bearing RTDs (1 EA/Bearing) with Aux. T/box
- SR : Stator RTDs (2 EA/Ph.) with Aux. T/box
- SH : Space Heater (1 EA/Motor) with Aux. T/box
- SP : Spare part (Spare cooling fan)
- LL : Long lead cable
- F : Temp. rise F (Standard Temp. rise B at Ambient temp. 40 °C)

C-Face, Foot Mounted

Catalog Number	HP	Frame Number	rpm r/min	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE250-12-L449TC-IBBRSRSH	250	L449TC	1185	460	95.8	0.84	296.3	680	1129.6	135	200	80	2890
IEEE300-36-L449TSC-IBBRSRSHSP	300	L449TSC	3570	460	95.8	0.90	327.5	700	444.0	130	225	87	2890
IEEE300-18-L449TC-IBBRSRSH	300	L449TC	1785	460	96.2	0.88	333.6	710	888.1	135	225	85	2890
IEEE300-12-L449TC-IBBRSRSH	300	L449TC	1185	460	95.8	0.84	350.9	675	1337.7	135	220	80	3320
IEEE350-36-L449TSC-IBBRSRSHSP	350	L449TSC	3570	460	95.8	0.90	378.5	700	513.1	130	225	87	3090
IEEE350-18-L449TC-IBBRSRSH	350	L449TC	1785	460	96.2	0.88	385.5	715	1026.2	135	225	85	3090
IEEE350-12-L449TC-IBBRSRSH	350	L449TC	1185	460	95.8	0.84	407.1	650	1551.7	120	200	80	3380
IEEE400-36-L449TSC-IBBRSRSHSP	400	L449TSC	3570	460	95.8	0.90	436.7	680	592.0	145	240	87	3820
IEEE400-18-L449TC-IBBRSRSH	400	L449TC	1785	460	96.2	0.88	444.8	710	1184.1	135	225	85	3620
IEEE400-12-5009C-IBBRSRSH	400	5009C	1185	460	95.8	0.84	467.9	680	1783.6	135	220	84	3970
IEEE450-36-5009SC-IBBRSRSHSP	450	5009SC	3570	460	95.8	0.90	487.7	725	661.1	130	230	87	3860
IEEE450-18-5009C-IBBRSRSH	450	5009C	1785	460	96.2	0.89	491.1	720	1322.2	135	230	85	3970
IEEE450-12-5009C-IBBRSRSH	450	5009C	1185	460	95.8	0.84	522.5	675	1991.7	135	220	84	4030
IEEE500-36-5010SC-IBBRSRSHSP	500	5010SC	3570	460	95.8	0.90	545.9	725	740.0	145	240	87	4800
IEEE500-18-5010C-IBBRSRSH	500	5010C	1785	460	96.2	0.89	549.7	720	1480.1	135	220	85	4820
IEEE500-12-5011C-IBBRSRSH	500	5011C	1185	460	95.8	0.84	584.9	675	2229.5	135	220	84	4850
IEEE600-18-5011C-IBBRSRSH	600	5011C	1785	460	96.2	0.89	659.7	720	1776.1	135	230	85	4940
IEEE600-36-5812SC-IBBRSRSHSP	600	5812SC	3570	460	95.8	0.89	662.4	670	888.1	150	250	89	6730
IEEE600-12-5812C-IBBRSRSH-F	600	5812C	1185	460	95.8	0.84	701.9	675	2675.4	135	220	85	6019
IEEE700-36-5812SC-IBBRSRSHSP	700	5812SC	3570	460	95.8	0.89	768.4	720	1030.1	150	250	89	6730
IEEE700-18-5812C-IBBRSRSH	700	5812C	1785	460	96.2	0.88	771.0	650	2052.4	120	220	87	7174
IEEE750-36-5812SC-IBBRSRSHSP	750	5812SC	3570	460	95.8	0.89	824.4	710	1105.1	150	250	89	6730
IEEE800-36-5812SC-IBBRSRSHSP	800	5812SC	3570	460	95.8	0.89	883.2	650	1184.1	130	240	89	6730
IEEE900-36-5812SC-IBBRSRSHSP-F	900	5812SC	3570	460	95.8	0.89	987.8	700	1324.2	150	250	89	7130
IEEE250-12-L449TC-IBSH	250	L449TC	1185	460	95.8	0.84	296.3	680	1129.6	135	200	80	2890
IEEE300-36-L449TSC-IBSHSP	300	L449TSC	3570	460	95.8	0.90	327.5	700	444.0	130	225	87	2890
IEEE300-18-L449TC-IBSH	300	L449TC	1785	460	96.2	0.88	333.6	710	888.1	135	225	85	2890
IEEE300-12-L449TC-IBSH	300	L449TC	1185	460	95.8	0.84	350.9	675	1337.7	135	220	80	3320
IEEE350-36-L449TSC-IBSHSP	350	L449TSC	3570	460	95.8	0.90	378.5	700	513.1	130	225	87	3090
IEEE350-18-L449TC-IBSH	350	L449TC	1785	460	96.2	0.88	385.5	715	1026.2	135	225	85	3090
IEEE350-12-L449TC-IBSH	350	L449TC	1185	460	95.8	0.84	407.1	650	1551.7	120	200	80	3380
IEEE400-36-L449TSC-IBSHSP	400	L449TSC	3570	460	95.8	0.90	436.7	680	592.0	145	240	87	3820
IEEE400-18-L449TC-IBSH	400	L449TC	1785	460	96.2	0.88	444.8	710	1184.1	135	225	85	3620
IEEE400-12-5009C-IBSH	400	5009C	1185	460	95.8	0.84	467.9	680	1783.6	135	220	84	3970
IEEE450-36-5009SC-IBSHSP	450	5009SC	3570	460	95.8	0.90	487.7	725	661.1	130	230	87	3860
IEEE450-18-5009C-IBSH	450	5009C	1785	460	96.2	0.89	491.1	720	1322.2	135	230	85	3970
IEEE450-12-5009C-IBSH	450	5009C	1185	460	95.8	0.84	522.5	675	1991.7	135	220	84	4030
IEEE500-36-5010SC-IBSHSP	500	5010SC	3570	460	95.8	0.90	545.9	725	740.0	145	240	87	4800
IEEE500-18-5010C-IBSH	500	5010C	1785	460	96.2	0.89	549.7	720	1480.1	135	220	85	4820
IEEE500-12-5011C-IBSH	500	5011C	1185	460	95.8	0.84	584.9	675	2229.5	135	220	84	4850
IEEE600-18-5011C-IBSH	600	5011C	1785	460	96.2	0.89	659.7	720	1776.1	135	230	85	4940
IEEE600-36-5812SC-IBSHSP	600	5812SC	3570	460	95.8	0.89	662.4	670	888.1	150	250	89	6730
IEEE600-12-5812C-IBSH-F	600	5812C	1185	460	95.8	0.84	701.9	675	2675.4	135	220	85	6019
IEEE700-36-5812SC-IBSHSP	700	5812SC	3570	460	95.8	0.89	768.4	720	1030.1	150	250	89	6730
IEEE700-18-5812C-IBSH	700	5812C	1785	460	96.2	0.88	771.0	650	2052.4	120	220	87	7174
IEEE750-36-5812SC-IBSHSP	750	5812SC	3570	460	95.8	0.89	824.4	710	1105.1	150	250	89	6730
IEEE800-36-5812SC-IBSHSP	800	5812SC	3570	460	95.8	0.89	883.2	650	1184.1	130	240	89	6730
IEEE900-36-5812SC-IBSHSP-F	900	5812SC	3570	460	95.8	0.89	987.8	700	1324.2	150	250	89	7130

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

※ Remarks

1. Applicable to Each single of accessory (Ex. IB, SH, IBSH & etc.)
2. Standard temperature rise B for HSDE Model (Except 900 HP Motor)
3. Motor power(HP) for HSDE model : Up to 900 HP
4. Applicable to the following mounting type.
 - 1) D-flange with Foot
 - 2) Vertical, C-face without Foot
 - 3) Vertical, D-flange without Foot

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, D-Flange, Foot mounted



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Protech seal
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

D-Flange, Foot Mounted

Catalog Number	HP	Frame Number	RPM (SPEED)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE1.5-12-182TD	1.5	182TD	1175	460	87.5	0.61	2.59	770	6.60	190	270	55	105
IEEE2-12-184TD	2	184TD	1175	460	88.5	0.68	3.13	790	8.99	180	260	55	105
IEEE3-36-182TD	3	182TD	3520	460	86.5	0.85	3.76	760	4.40	190	260	72	105
IEEE3-18-182TD	3	182TD	1770	460	89.5	0.79	3.91	930	8.76	220	280	60	105
IEEE3-12-213TD	3	213TD	1185	460	89.5	0.67	4.60	770	13.08	180	250	57	150
IEEE5-36-184TD	5	184TD	3515	460	88.5	0.86	6.10	800	7.42	190	260	72	105
IEEE5-18-184TD	5	184TD	1760	460	89.5	0.80	6.49	840	14.81	210	260	60	105
IEEE5-12-215TD	5	215TD	1180	460	89.5	0.68	7.63	680	22.09	170	220	57	175
IEEE7.5-36-213TD	7.5	213TD	3530	460	89.5	0.85	9.07	700	10.98	160	260	73	150
IEEE7.5-18-213TD	7.5	213TD	1775	460	91.7	0.77	9.78	940	21.83	190	250	62	150
IEEE7.5-12-254TD	7.5	254TD	1175	460	91.0	0.75	10.11	640	32.98	170	250	64	240
IEEE10-36-215TD	10	215TD	3525	460	90.2	0.86	12.13	680	14.99	160	260	73	175
IEEE10-18-215TD	10	215TD	1770	460	91.7	0.79	12.99	750	29.85	180	240	62	175
IEEE10-12-256TD	10	256TD	1175	460	91.0	0.75	13.79	680	44.97	170	250	64	290
IEEE15-36-254TD	15	254TD	3550	460	91.0	0.88	17.24	710	21.83	150	250	77	240
IEEE15-18-254TD	15	254TD	1775	460	92.4	0.82	18.22	750	43.66	200	240	70	240
IEEE15-12-284TD	15	284TD	1175	460	91.7	0.77	19.55	600	65.95	155	240	65	360
IEEE20-36-256TD	20	256TD	3550	460	91.0	0.89	23.25	740	29.77	150	250	77	290
IEEE20-18-256TD	20	256TD	1775	460	93.0	0.82	24.84	800	59.53	200	240	70	290
IEEE20-12-286TD	20	286TD	1175	460	91.7	0.77	26.66	650	89.94	150	230	65	410
IEEE25-36-284TSD	25	284TSD	3560	460	91.7	0.89	28.45	670	36.61	160	230	80	360
IEEE25-18-284TD	25	284TD	1775	460	93.6	0.81	30.63	790	73.43	170	220	72	360
IEEE25-12-324TD	25	324TD	1175	460	93.0	0.80	31.21	720	110.92	170	210	68	550
IEEE30-36-286TSD	30	286TSD	3560	460	91.7	0.89	33.83	685	43.54	160	230	80	410
IEEE30-18-286TD	30	286TD	1775	460	93.6	0.81	36.42	740	87.32	170	220	72	410
IEEE30-12-326TD	30	326TD	1175	460	93.0	0.80	37.11	830	131.91	170	210	68	560
IEEE40-36-324TSD	40	324TSD	3560	460	92.4	0.92	44.54	850	59.37	150	230	82	550
IEEE40-18-324TD	40	324TD	1780	460	94.1	0.82	48.80	850	118.74	170	220	74	550
IEEE40-12-364TD	40	364TD	1185	460	94.1	0.82	48.80	680	178.36	150	220	73	780
IEEE50-36-326TSD	50	326TSD	3560	460	93.0	0.92	54.57	850	73.22	150	230	82	560
IEEE50-18-326TD	50	326TD	1780	460	94.5	0.84	58.50	830	146.44	170	220	74	560
IEEE50-12-365TD	50	365TD	1185	460	94.1	0.82	60.18	680	219.98	150	220	73	820
IEEE60-36-364TSD	60	364TSD	3570	460	94.1	0.92	65.60	680	88.81	140	220	82	780
IEEE60-18-364TD	60	364TD	1780	460	95.0	0.85	69.94	670	178.11	150	220	82	780
IEEE60-12-404TD	60	404TD	1185	460	94.5	0.84	71.15	670	267.54	140	220	75	1120
IEEE75-36-365TSD	75	365TSD	3570	460	94.5	0.92	79.83	680	108.54	140	220	82	820
IEEE75-18-365TD	75	365TD	1780	460	95.4	0.85	85.13	690	217.69	150	220	82	820
IEEE75-12-405TD	75	405TD	1185	460	94.5	0.84	86.96	680	326.99	140	220	75	1120
IEEE100-36-405TSD	100	405TSD	3570	460	94.5	0.91	110.07	700	148.01	120	220	85	1120
IEEE100-18-405TD	100	405TD	1780	460	95.4	0.87	114.07	650	296.85	140	220	82	1120
IEEE100-12-444TD	100	444TD	1185	460	95	0.85	116.57	680	445.90	140	220	80	1530
IEEE125-36-444TSD	125	444TSD	3570	460	95	0.90	139.46	700	187.48	120	220	85	1610
IEEE125-18-444TD	125	444TD	1785	460	95.4	0.88	142.03	700	374.96	140	220	85	1530
IEEE125-12-445TD	125	445TD	1185	460	95	0.85	147.66	675	564.81	140	220	80	1640
IEEE150-36-445TSD	150	445TSD	3570	460	95	0.90	161.48	700	217.08	120	220	85	1770
IEEE150-18-445TD	150	445TD	1785	460	95.8	0.88	163.77	700	434.16	140	220	85	1640
IEEE150-12-447TD	150	447TD	1185	460	95.8	0.85	169.55	680	653.99	140	220	80	1860
IEEE200-36-447TSD	200	447TSD	3570	460	95.4	0.90	219.27	700	296.02	120	220	85	1900
IEEE200-18-447TD	200	447TD	1785	460	96.2	0.88	222.39	700	592.04	140	220	85	1860
IEEE200-12-449TD	200	449TD	1185	460	95.8	0.85	231.20	680	891.80	140	220	80	2430
IEEE250-36-449TSD	250	449TSD	3570	460	95.8	0.90	276.58	700	374.96	120	220	85	2430
IEEE250-18-449TD	250	449TD	1785	460	96.2	0.88	281.69	700	749.91	140	220	85	2430

* For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, C-Face, Footless



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Protech seal
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

C-Face, Footless

Catalog Number	HP	Frame Number	RPM (SPEED)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE1-36-143TCRD	1	143TC	3490	460	77.0	0.82	1.49	830	1.51	200	270	69	53
IEEE1-18-143TCRD	1	143TC	1755	460	85.5	0.70	1.57	930	3.01	280	310	56	53
IEEE1-12-145TCRD	1	145TC	1155	460	82.5	0.63	1.81	800	4.57	180	275	55	55
IEEE1.5-36-143TCRD	1.5	143TC	3485	460	84.0	0.84	1.96	1000	2.22	185	260	69	53
IEEE1.5-18-145TCRD	1.5	145TC	1750	460	86.5	0.72	2.22	900	4.43	260	290	56	55
IEEE1.5-12-182TCRD	1.5	182TC	1175	460	87.5	0.61	2.59	770	6.60	190	270	55	105
IEEE2-36-145TCRD	2	145TC	3480	460	85.5	0.85	2.59	950	3.04	180	250	69	55
IEEE2-18-145TCRD	2	145TC	1745	460	86.5	0.73	2.98	830	6.06	245	280	56	55
IEEE2-12-184TCRD	2	184TC	1175	460	88.5	0.68	3.13	790	8.99	180	260	55	105
IEEE3-36-182TCRD	3	182TC	3520	460	86.5	0.85	3.76	760	4.40	190	260	72	105
IEEE3-18-182TCRD	3	182TC	1770	460	89.5	0.79	3.91	930	8.76	220	280	60	105
IEEE3-12-213TCRD	3	213TC	1185	460	89.5	0.67	4.60	770	13.08	180	250	57	150
IEEE5-36-184TCRD	5	184TC	3515	460	88.5	0.86	6.10	800	7.42	190	260	72	105
IEEE5-18-184TCRD	5	184TC	1760	460	89.5	0.80	6.49	840	14.81	210	260	60	105
IEEE5-12-215TCRD	5	215TC	1180	460	89.5	0.68	7.63	680	22.09	170	220	57	175
IEEE7.5-36-213TCRD	7.5	213TC	3530	460	89.5	0.85	9.07	700	10.98	160	260	73	150
IEEE7.5-18-213TCRD	7.5	213TC	1775	460	91.7	0.77	9.78	940	21.83	190	250	62	150
IEEE7.5-12-254TCRD	7.5	254TC	1175	460	91.0	0.75	10.11	640	32.98	170	250	64	240
IEEE10-36-215TCRD	10	215TC	3525	460	90.2	0.86	12.13	680	14.99	160	260	73	175
IEEE10-18-215TCRD	10	215TC	1770	460	91.7	0.79	12.99	750	29.85	180	240	62	175
IEEE10-12-256TCRD	10	256TC	1175	460	91.0	0.75	13.79	680	44.97	170	250	64	290
IEEE15-36-254TCRD	15	254TC	3550	460	91.0	0.88	17.24	710	21.83	150	250	77	240
IEEE15-18-254TCRD	15	254TC	1775	460	92.4	0.82	18.22	750	43.66	200	240	70	240
IEEE15-12-284TCRD	15	284TC	1175	460	91.7	0.77	19.55	600	65.95	155	240	65	360
IEEE20-36-256TCRD	20	256TC	3550	460	91.0	0.89	23.25	740	29.77	150	250	77	290
IEEE20-18-256TCRD	20	256TC	1775	460	93.0	0.82	24.84	800	59.53	200	240	70	290
IEEE20-12-286TCRD	20	286TC	1175	460	91.7	0.77	26.66	650	89.94	150	230	65	410
IEEE25-36-284TSCRD	25	284TSC	3560	460	91.7	0.89	28.45	670	36.61	160	230	80	360
IEEE25-18-284TSCRD	25	284TC	1775	460	93.6	0.81	30.63	790	73.43	170	220	72	360
IEEE25-12-324TSCRD	25	324TC	1175	460	93.0	0.80	31.21	720	110.92	170	210	68	550
IEEE30-36-286TSCRD	30	286TSC	3560	460	91.7	0.89	33.83	685	43.54	160	230	80	410
IEEE30-18-286TCRD	30	286TC	1775	460	93.6	0.81	36.42	740	87.32	170	220	72	410
IEEE30-12-326TCRD	30	326TC	1175	460	93.0	0.80	37.11	830	131.91	170	210	68	560
IEEE40-36-324TSCRD	40	324TSC	3560	460	92.4	0.92	44.54	850	59.37	150	230	82	550
IEEE40-18-324TCRD	40	324TC	1780	460	94.1	0.82	48.80	850	118.74	170	220	74	550
IEEE40-12-364TCRD	40	364TC	1185	460	94.1	0.82	48.80	680	178.36	150	220	73	780
IEEE50-36-326TSCRD	50	326TSC	3560	460	93.0	0.92	54.57	850	73.22	150	230	82	560
IEEE50-18-326TCRD	50	326TC	1780	460	94.5	0.84	58.50	830	146.44	170	220	74	560
IEEE50-12-365TCRD	50	365TC	1185	460	94.1	0.82	60.18	680	219.98	150	220	73	820
IEEE60-36-364TSCRD	60	364TSC	3570	460	94.1	0.92	65.60	680	88.81	140	220	82	780
IEEE60-18-364TCRD	60	364TC	1780	460	95.0	0.85	69.94	670	178.11	150	220	82	780
IEEE60-12-404TCRD	60	404TC	1185	460	94.5	0.84	71.15	670	267.54	140	220	75	1120
IEEE75-36-365TSCRD	75	365TSC	3570	460	94.5	0.92	79.83	680	108.54	140	220	82	820
IEEE75-18-365TCRD	75	365TC	1780	460	95.4	0.85	85.13	690	217.69	150	220	82	820
IEEE75-12-405TCRD	75	405TC	1185	460	94.5	0.84	86.96	680	326.99	140	220	75	1120
IEEE100-36-405TSCRD	100	405TSC	3570	460	94.5	0.91	110.07	700	148.01	120	220	85	1120
IEEE100-18-405TCRD	100	405TC	1780	460	95.4	0.87	114.07	650	296.85	140	220	82	1120
IEEE100-12-444TCRD	100	444TC	1185	460	95	0.85	116.57	680	445.90	140	220	80	1530
IEEE125-36-444TSCRD	125	444TSC	3570	460	95	0.90	139.46	700	187.48	120	220	85	1610
IEEE125-18-444TCRD	125	444TC	1785	460	95.4	0.88	142.03	700	374.96	140	220	85	1530
IEEE125-12-445TCRD	125	445TC	1185	460	95	0.85	147.66	675	564.81	140	220	80	1640
IEEE150-36-445TSCRD	150	445TSC	3570	460	95	0.90	161.48	700	217.08	120	220	85	1770
IEEE150-18-445TCRD	150	445TC	1785	460	95.8	0.88	163.77	700	434.16	140	220	85	1640
IEEE150-12-447TCRD	150	447TC	1185	460	95.8	0.85	169.55	680	653.99	140	220	80	1860
IEEE200-36-447TSCRD	200	447TSC	3570	460	95.4	0.90	219.27	700	296.02	120	220	85	1900
IEEE200-18-447TCRD	200	447TC	1785	460	96.2	0.88	222.39	700	592.04	140	220	85	1860
IEEE200-12-449TCRD	200	449TC	1185	460	95.8	0.85	231.20	680	891.80	140	220	80	2430
IEEE250-36-449TSCRD	250	449TSC	3570	460	95.8	0.90	276.58	700	374.96	120	220	85	2430
IEEE250-18-449TCRD	250	449TC	1785	460	96.2	0.88	281.69	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, D-Flange, Footless



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Protech seal
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

D-Flange, Footless

Catalog Number	HP	Frame Number	RPM (SPEED)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE1.5-12-182TDRD	1.5	182TD	1175	460	87.5	0.61	2.59	770	6.60	190	270	55	105
IEEE2-12-184TDRD	2	184TD	1175	460	88.5	0.68	3.13	790	8.99	180	260	55	105
IEEE3-36-182TDRD	3	182TD	3520	460	86.5	0.85	3.76	760	4.40	190	260	72	105
IEEE3-18-182TDRD	3	182TD	1770	460	89.5	0.79	3.91	930	8.76	220	280	60	105
IEEE3-12-213TDRD	3	213TD	1185	460	89.5	0.67	4.60	770	13.08	180	250	57	150
IEEE5-36-184TDRD	5	184TD	3515	460	88.5	0.86	6.10	800	7.42	190	260	72	105
IEEE5-18-184TDRD	5	184TD	1760	460	89.5	0.80	6.49	840	14.81	210	260	60	105
IEEE5-12-215TDRD	5	215TD	1180	460	89.5	0.68	7.63	680	22.09	170	220	57	175
IEEE7.5-36-213TDRD	7.5	213TD	3530	460	89.5	0.85	9.07	700	10.98	160	260	73	150
IEEE7.5-18-213TDRD	7.5	213TD	1775	460	91.7	0.77	9.78	940	21.83	190	250	62	150
IEEE7.5-12-254TDRD	7.5	254TD	1175	460	91.0	0.75	10.11	640	32.98	170	250	64	240
IEEE10-36-215TDRD	10	215TD	3525	460	90.2	0.86	12.13	680	14.99	160	260	73	175
IEEE10-18-215TDRD	10	215TD	1770	460	91.7	0.79	12.99	750	29.85	180	240	62	175
IEEE10-12-256TDRD	10	256TD	1175	460	91.0	0.75	13.79	680	44.97	170	250	64	290
IEEE15-36-254TDRD	15	254TD	3550	460	91.0	0.88	17.24	710	21.83	150	250	77	240
IEEE15-18-254TDRD	15	254TD	1775	460	92.4	0.82	18.22	750	43.66	200	240	70	240
IEEE15-12-284TDRD	15	284TD	1175	460	91.7	0.77	19.55	600	65.95	155	240	65	360
IEEE20-36-256TDRD	20	256TD	3550	460	91.0	0.89	23.25	740	29.77	150	250	77	290
IEEE20-18-256TDRD	20	256TD	1775	460	93.0	0.82	24.84	800	59.53	200	240	70	290
IEEE20-12-286TDRD	20	286TD	1175	460	91.7	0.77	26.66	650	89.94	150	230	65	410
IEEE25-36-284TSDRD	25	284TSD	3560	460	91.7	0.89	28.45	670	36.61	160	230	80	360
IEEE25-18-284TDRD	25	284TD	1775	460	93.6	0.81	30.63	790	73.43	170	220	72	360
IEEE25-12-324TDRD	25	324TD	1175	460	93.0	0.80	31.21	720	110.92	170	210	68	550
IEEE30-36-286TSDRD	30	286TSD	3560	460	91.7	0.89	33.83	685	43.54	160	230	80	410
IEEE30-18-286TDRD	30	286TD	1775	460	93.6	0.81	36.42	740	87.32	170	220	72	410
IEEE30-12-326TDRD	30	326TD	1175	460	93.0	0.80	37.11	830	131.91	170	210	68	560
IEEE40-36-324TSDRD	40	324TSD	3560	460	92.4	0.92	44.54	850	59.37	150	230	82	550
IEEE40-18-324TDRD	40	324TD	1780	460	94.1	0.82	48.80	850	118.74	170	220	74	550
IEEE40-12-364TDRD	40	364TD	1185	460	94.1	0.82	48.80	680	178.36	150	220	73	780
IEEE50-36-326TSDRD	50	326TSD	3560	460	93.0	0.92	54.57	850	73.22	150	230	82	560
IEEE50-18-326TDRD	50	326TD	1780	460	94.5	0.84	58.50	830	146.44	170	220	74	560
IEEE50-12-365TDRD	50	365TD	1185	460	94.1	0.82	60.18	680	219.98	150	220	73	820
IEEE60-36-364TSDRD	60	364TSD	3570	460	94.1	0.92	65.60	680	88.81	140	220	82	780
IEEE60-18-364TDRD	60	364TD	1780	460	95.0	0.85	69.94	670	178.11	150	220	82	780
IEEE60-12-404TDRD	60	404TD	1185	460	94.5	0.84	71.15	670	267.54	140	220	75	1120
IEEE75-36-365TSDRD	75	365TSD	3570	460	94.5	0.92	79.83	680	108.54	140	220	82	820
IEEE75-18-365TDRD	75	365TD	1780	460	95.4	0.85	85.13	690	217.69	150	220	82	820
IEEE75-12-405TDRD	75	405TD	1185	460	94.5	0.84	86.96	680	326.99	140	220	75	1120
IEEE100-36-405TSDRD	100	405TSD	3570	460	94.5	0.91	110.07	700	148.01	120	220	85	1120
IEEE100-18-405TDRD	100	405TD	1780	460	95.4	0.87	114.07	650	296.85	140	220	82	1120
IEEE100-12-444TDRD	100	444TD	1185	460	95	0.85	116.57	680	445.90	140	220	80	1530
IEEE125-36-444TSDRD	125	444TSD	3570	460	95	0.90	139.46	700	187.48	120	220	85	1610
IEEE125-18-444TDRD	125	444TD	1785	460	95.4	0.88	142.03	700	374.96	140	220	85	1530
IEEE125-12-445TDRD	125	445TD	1185	460	95	0.85	147.66	675	564.81	140	220	80	1640
IEEE150-36-445TSDRD	150	445TSD	3570	460	95	0.90	161.48	700	217.08	120	220	85	1770
IEEE150-18-445TDRD	150	445TD	1785	460	95.8	0.88	163.77	700	434.16	140	220	85	1640
IEEE150-12-447TDRD	150	447TD	1185	460	95.8	0.85	169.55	680	653.99	140	220	80	1860
IEEE200-36-447TSDRD	200	447TSD	3570	460	95.4	0.90	219.27	700	296.02	120	220	85	1900
IEEE200-18-447TDRD	200	447TD	1785	460	96.2	0.88	222.39	700	592.04	140	220	85	1860
IEEE200-12-449TDRD	200	449TD	1185	460	95.8	0.85	231.20	680	891.80	140	220	80	2430
IEEE250-36-449TSDRD	250	449TSD	3570	460	95.8	0.90	276.58	700	374.96	120	220	85	2430
IEEE250-18-449TDRD	250	449TD	1785	460	96.2	0.88	281.69	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, Vertical, C-Face, Footless



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Protech seal
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

Vertical C-Face, Footless

Catalog Number	HP	Frame Number	RPM (SPEED)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE1-36-143TCRDV	1	143TC	3490	460	77.0	0.82	1.49	830	1.51	200	270	69	53
IEEE1-18-143TCRDV	1	143TC	1755	460	85.5	0.70	1.57	930	3.01	280	310	56	53
IEEE1-12-145TCRDV	1	145TC	1155	460	82.5	0.63	1.81	800	4.57	180	275	55	55
IEEE1.5-36-143TCRDV	1.5	143TC	3485	460	84.0	0.84	1.96	1000	2.22	185	260	69	53
IEEE1.5-18-145TCRDV	1.5	145TC	1750	460	86.5	0.72	2.22	900	4.43	260	290	56	55
IEEE1.5-12-182TCRDV	1.5	182TC	1175	460	87.5	0.61	2.59	770	6.60	190	270	55	105
IEEE2-36-145TCRDV	2	145TC	3480	460	85.5	0.85	2.59	950	3.04	180	250	69	55
IEEE2-18-145TCRDV	2	145TC	1745	460	86.5	0.73	2.98	830	6.06	245	280	56	55
IEEE2-12-184TCRDV	2	184TC	1175	460	88.5	0.68	3.13	790	8.99	180	260	55	105
IEEE3-36-182TCRDV	3	182TC	3520	460	86.5	0.85	3.76	760	4.40	190	260	72	105
IEEE3-18-182TCRDV	3	182TC	1770	460	89.5	0.79	3.91	930	8.76	220	280	60	105
IEEE3-12-213TCRDV	3	213TC	1185	460	89.5	0.67	4.60	770	13.08	180	250	57	150
IEEE5-36-184TCRDV	5	184TC	3515	460	88.5	0.86	6.10	800	7.42	190	260	72	105
IEEE5-18-184TCRDV	5	184TC	1760	460	89.5	0.80	6.49	840	14.81	210	260	60	105
IEEE5-12-215TCRDV	5	215TC	1180	460	89.5	0.68	7.63	680	22.09	170	220	57	175
IEEE7.5-36-213TCRDV	7.5	213TC	3530	460	89.5	0.85	9.07	700	10.98	160	260	73	150
IEEE7.5-18-213TCRDV	7.5	213TC	1775	460	91.7	0.77	9.78	940	21.83	190	250	62	150
IEEE7.5-12-254TCRDV	7.5	254TC	1175	460	91.0	0.75	10.11	640	32.98	170	250	64	240
IEEE10-36-215TCRDV	10	215TC	3525	460	90.2	0.86	12.13	680	14.99	160	260	73	175
IEEE10-18-215TCRDV	10	215TC	1770	460	91.7	0.79	12.99	750	29.85	180	240	62	175
IEEE10-12-256TCRDV	10	256TC	1175	460	91.0	0.75	13.79	680	44.97	170	250	64	290
IEEE15-36-254TCRDV	15	254TC	3550	460	91.0	0.88	17.24	710	21.83	150	250	77	240
IEEE15-18-254TCRDV	15	254TC	1775	460	92.4	0.82	18.22	750	43.66	200	240	70	240
IEEE15-12-284TCRDV	15	284TC	1175	460	91.7	0.77	19.55	600	65.95	155	240	65	360
IEEE20-36-256TCRDV	20	256TC	3550	460	91.0	0.89	23.25	740	29.77	150	250	77	290
IEEE20-18-256TCRDV	20	256TC	1775	460	93.0	0.82	24.84	800	59.53	200	240	70	290
IEEE20-12-286TCRDV	20	286TC	1175	460	91.7	0.77	26.66	650	89.94	150	230	65	410
IEEE25-36-284TSCRDV	25	284TSC	3560	460	91.7	0.89	28.45	670	36.61	160	230	80	360
IEEE25-18-284TSCRDV	25	284TC	1775	460	93.6	0.81	30.63	790	73.43	170	220	72	360
IEEE25-12-324TSCRDV	25	324TC	1175	460	93.0	0.80	31.21	720	110.92	170	210	68	550
IEEE30-36-286TSCRDV	30	286TSC	3560	460	91.7	0.89	33.83	685	43.54	160	230	80	410
IEEE30-18-286TCRDV	30	286TC	1775	460	93.6	0.81	36.42	740	87.32	170	220	72	410
IEEE30-12-326TCRDV	30	326TC	1175	460	93.0	0.80	37.11	830	131.91	170	210	68	560
IEEE40-36-324TSCRDV	40	324TSC	3560	460	92.4	0.92	44.54	850	59.37	150	230	82	550
IEEE40-18-324TCRDV	40	324TC	1780	460	94.1	0.82	48.80	850	118.74	170	220	74	550
IEEE40-12-364TCRDV	40	364TC	1185	460	94.1	0.82	48.80	680	178.36	150	220	73	780
IEEE50-36-326TSCRDV	50	326TSC	3560	460	93.0	0.92	54.57	850	73.22	150	230	82	560
IEEE50-18-326TCRDV	50	326TC	1780	460	94.5	0.84	58.50	830	146.44	170	220	74	560
IEEE50-12-365TCRDV	50	365TC	1185	460	94.1	0.82	60.18	680	219.98	150	220	73	820
IEEE60-36-364TSCRDV	60	364TSC	3570	460	94.1	0.92	65.60	680	88.81	140	220	82	780
IEEE60-18-364TCRDV	60	364TC	1780	460	95.0	0.85	69.94	670	178.11	150	220	82	780
IEEE60-12-404TCRDV	60	404TC	1185	460	94.5	0.84	71.15	670	267.54	140	220	75	1120
IEEE75-36-365TSCRDV	75	365TSC	3570	460	94.5	0.92	79.83	680	108.54	140	220	82	820
IEEE75-18-365TCRDV	75	365TC	1780	460	95.4	0.85	85.13	690	217.69	150	220	82	820
IEEE75-12-405TCRDV	75	405TC	1185	460	94.5	0.84	86.96	680	326.99	140	220	75	1120
IEEE100-36-405TSCRDV	100	405TSC	3570	460	94.5	0.91	110.07	700	148.01	120	220	85	1120
IEEE100-18-405TCRDV	100	405TC	1780	460	95.4	0.87	114.07	650	296.85	140	220	82	1120
IEEE100-12-444TCRDV	100	444TC	1185	460	95	0.85	116.57	680	445.90	140	220	80	1530
IEEE125-36-444TSCRDV	125	444TSC	3570	460	95	0.90	139.46	700	187.48	120	220	85	1610
IEEE125-18-444TCRDV	125	444TC	1785	460	95.4	0.88	142.03	700	374.96	140	220	85	1530
IEEE125-12-445TCRDV	125	445TC	1185	460	95	0.85	147.66	675	564.81	140	220	80	1640
IEEE150-36-445TSCRDV	150	445TSC	3570	460	95	0.90	161.48	700	217.08	120	220	85	1770
IEEE150-18-445TCRDV	150	445TC	1785	460	95.8	0.88	163.77	700	434.16	140	220	85	1640
IEEE150-12-447TCRDV	150	447TC	1185	460	95.8	0.85	169.55	680	653.99	140	220	80	1860
IEEE200-36-447TSCRDV	200	447TSC	3570	460	95.4	0.90	219.27	700	296.02	120	220	85	1900
IEEE200-18-447TCRDV	200	447TC	1785	460	96.2	0.88	222.39	700	592.04	140	220	85	1860
IEEE200-12-449TCRDV	200	449TC	1185	460	95.8	0.85	231.20	680	891.80	140	220	80	2430
IEEE250-36-449TSCRDV	250	449TSC	3570	460	95.8	0.90	276.58	700	374.96	120	220	85	2430
IEEE250-18-449TCRDV	250	449TC	1785	460	96.2	0.88	281.69	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, Vertical, D-Flange, Footless



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- Cast Iron construction, 460 V, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Protech seal
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

Vertical D-Flange with Footless Mounted (V1)

Catalog Number	HP	Frame Number	Frame Number	RPM (SPEED)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
										Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IEEE1.5-12-182TDRDV	1.5	182TD	182TD	1175	460	87.5	0.61	2.59	770	6.60	190	270	55	105
IEEE2-12-184TDRDV	2	184TD	184TD	1175	460	88.5	0.68	3.13	790	8.99	180	260	55	105
IEEE3-36-182TDRDV	3	182TD	182TD	3520	460	86.5	0.85	3.76	760	4.40	190	260	72	105
IEEE3-18-182TDRDV	3	182TD	182TD	1770	460	89.5	0.79	3.91	930	8.76	220	280	60	105
IEEE3-12-213TDRDV	3	213TD	213TD	1185	460	89.5	0.67	4.60	770	13.08	180	250	57	150
IEEE5-36-184TDRDV	5	184TD	184TD	3515	460	88.5	0.86	6.10	800	7.42	190	260	72	105
IEEE5-18-184TDRDV	5	184TD	184TD	1760	460	89.5	0.80	6.49	840	14.81	210	260	60	105
IEEE5-12-215TDRDV	5	215TD	215TD	1180	460	89.5	0.68	7.63	680	22.09	170	220	57	175
IEEE7.5-36-213TDRDV	7.5	213TD	213TD	3530	460	89.5	0.85	9.07	700	10.98	160	260	73	150
IEEE7.5-18-213TDRDV	7.5	213TD	213TD	1775	460	91.7	0.77	9.78	940	21.83	190	250	62	150
IEEE7.5-12-254TDRDV	7.5	254TD	254TD	1175	460	91.0	0.75	10.11	640	32.98	170	250	64	240
IEEE10-36-215TDRDV	10	215TD	215TD	3525	460	90.2	0.86	12.13	680	14.99	160	260	73	175
IEEE10-18-215TDRDV	10	215TD	215TD	1770	460	91.7	0.79	12.99	750	29.85	180	240	62	175
IEEE10-12-256TDRDV	10	256TD	256TD	1175	460	91.0	0.75	13.79	680	44.97	170	250	64	290
IEEE15-36-254TDRDV	15	254TD	254TD	3550	460	91.0	0.88	17.24	710	21.83	150	250	77	240
IEEE15-18-254TDRDV	15	254TD	254TD	1775	460	92.4	0.82	18.22	750	43.66	200	240	70	240
IEEE15-12-284TDRDV	15	284TD	284TD	1175	460	91.7	0.77	19.55	600	65.95	155	240	65	360
IEEE20-36-256TDRDV	20	256TD	256TD	3550	460	91.0	0.89	23.25	740	29.77	150	250	77	290
IEEE20-18-256TDRDV	20	256TD	256TD	1775	460	93.0	0.82	24.84	800	59.53	200	240	70	290
IEEE20-12-286TDRDV	20	286TD	286TD	1175	460	91.7	0.77	26.66	650	89.94	150	230	65	410
IEEE25-36-284TSDRDV	25	284TSD	284TSD	3560	460	91.7	0.89	28.45	670	36.61	160	230	80	360
IEEE25-18-284TDRDV	25	284TD	284TD	1775	460	93.6	0.81	30.63	790	73.43	170	220	72	360
IEEE25-12-324TDRDV	25	324TD	324TD	1175	460	93.0	0.80	31.21	720	110.92	170	210	68	550
IEEE30-36-286TSDRDV	30	286TSD	286TSD	3560	460	91.7	0.89	33.83	685	43.54	160	230	80	410
IEEE30-18-286TDRDV	30	286TD	286TD	1775	460	93.6	0.81	36.42	740	87.32	170	220	72	410
IEEE30-12-326TDRDV	30	326TD	326TD	1175	460	93.0	0.80	37.11	830	131.91	170	210	68	560
IEEE40-36-324TSDRDV	40	324TSD	324TSD	3560	460	92.4	0.92	44.54	850	59.37	150	230	82	550
IEEE40-18-324TDRDV	40	324TD	324TD	1780	460	94.1	0.82	48.80	850	118.74	170	220	74	550
IEEE40-12-364TDRDV	40	364TD	364TD	1185	460	94.1	0.82	48.80	680	178.36	150	220	73	780
IEEE50-36-326TSDRDV	50	326TSD	326TSD	3560	460	93.0	0.92	54.57	850	73.22	150	230	82	560
IEEE50-18-326TDRDV	50	326TD	326TD	1780	460	94.5	0.84	58.50	830	146.44	170	220	74	560
IEEE50-12-365TDRDV	50	365TD	365TD	1185	460	94.1	0.82	60.18	680	219.98	150	220	73	820
IEEE60-36-364TSDRDV	60	364TSD	364TSD	3570	460	94.1	0.92	65.60	680	88.81	140	220	82	780
IEEE60-18-364TDRDV	60	364TD	364TD	1780	460	95.0	0.85	69.94	670	178.11	150	220	82	780
IEEE60-12-404TDRDV	60	404TD	404TD	1185	460	94.5	0.84	71.15	670	267.54	140	220	75	1120
IEEE75-36-365TSDRDV	75	365TSD	365TSD	3570	460	94.5	0.92	79.83	680	108.54	140	220	82	820
IEEE75-18-365TDRDV	75	365TD	365TD	1780	460	95.4	0.85	85.13	690	217.69	150	220	82	820
IEEE75-12-405TDRDV	75	405TD	405TD	1185	460	94.5	0.84	86.96	680	326.99	140	220	75	1120
IEEE100-36-405TSDRDV	100	405TSD	405TSD	3570	460	94.5	0.91	110.07	700	148.01	120	220	85	1120
IEEE100-18-405TDRDV	100	405TD	405TD	1780	460	95.4	0.87	114.07	650	296.85	140	220	82	1120
IEEE100-12-444TDRDV	100	444TD	444TD	1185	460	95	0.85	116.57	680	445.90	140	220	80	1530
IEEE125-36-444TSDRDV	125	444TSD	444TSD	3570	460	95	0.90	139.46	700	187.48	120	220	85	1610
IEEE125-18-444TDRDV	125	444TD	444TD	1785	460	95.4	0.88	142.03	700	374.96	140	220	85	1530
IEEE125-12-445TDRDV	125	445TD	445TD	1185	460	95	0.85	147.66	675	564.81	140	220	80	1640
IEEE150-36-445TSDRDV	150	445TSD	445TSD	3570	460	95	0.90	161.48	700	217.08	120	220	85	1770
IEEE150-18-445TDRDV	150	445TD	445TD	1785	460	95.8	0.88	163.77	700	434.16	140	220	85	1640
IEEE150-12-447TDRDV	150	447TD	447TD	1185	460	95.8	0.85	169.55	680	653.99	140	220	80	1860
IEEE200-36-447TSDRDV	200	447TSD	447TSD	3570	460	95.4	0.90	219.27	700	296.02	120	220	85	1900
IEEE200-18-447TDRDV	200	447TD	447TD	1785	460	96.2	0.88	222.39	700	592.04	140	220	85	1860
IEEE200-12-449TDRDV	200	449TD	449TD	1185	460	95.8	0.85	231.20	680	891.80	140	220	80	2430
IEEE250-36-449TSDRDV	250	449TSD	449TSD	3570	460	95.8	0.90	276.58	700	374.96	120	220	85	2430
IEEE250-18-449TDRDV	250	449TD	449TD	1785	460	96.2	0.88	281.69	700	749.91	140	220	85	2430

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

Severe duty Features HES/HHI Model
Severe duty Features HSDE Model
IEEE841 Features HL Model
IEEE841 Features XL Model
Explosion proof Features DXHHI Model
Severe duty Performances HES/HHI Model
Severe duty Performances HSDE Model
IEEE841 Performances HL Model
IEEE841 Performances XL Model
Explosion proof Performances DXHHI Model
Severe duty Dimensions HES/HHI Model
Severe duty Dimensions HSDE Model
IEEE841 Dimensions HL Model
IEEE841 Dimensions XL Model
Explosion proof Dimensions DXHHI Model

IXHHI Model - Explosion proof, Premium Efficiency Three phase, TEFC, Foot mounted



Features


- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~ 125 HP), 460 V (150 HP ~ 250 HP)
- Class 1 Division 1 Group C&D Temp. code T4 with Thermostat (1 EA/Ph.)
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

Foot Mounted

	Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
										Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
Severe duty Features HES/HHI Model	IXHHI1-36-143T	1	143T	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	73	64
	IXHHI1-18-143T	1	143T	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	64	64
Severe duty Features HSDE Model	IXHHI1-12-145T	1	145T	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	66
	IXHHI1.5-36-143T	1.5	143T	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	73	64
Explosion proof Features IXHHI Model	IXHHI1.5-18-145T	1.5	145T	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	64	66
	IXHHI1.5-12-182T	1.5	182T	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	60	112
Explosion proof Features XL Model	IXHHI2-36-145T	2	145T	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	73	66
	IXHHI2-18-145T	2	145T	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	64	66
Severe duty Performances HES/HHI Model	IXHHI2-12-184T	2	184T	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	60	121
	IXHHI3-36-182T	3	182T	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	73	112
Severe duty Performances HSDE Model	IXHHI3-18-182T	3	182T	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	64	112
	IXHHI3-12-213T	3	213T	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	60	160
Explosion proof Features XL Model	IXHHI5-36-184T	5	184T	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	73	121
	IXHHI5-18-184T	5	184T	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	64	121
Severe duty Performances HSDE Model	IXHHI5-12-215T	5	215T	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	62	180
	IXHHI7.5-36-213T	7.5	213T	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	76	160
Explosion proof Features XL Model	IXHHI7.5-18-213T	7.5	213T	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	69	160
	IXHHI7.5-12-254T	7.5	254T	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	310
Severe duty Performances HSDE Model	IXHHI10-36-215T	10	215T	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	76	180
	IXHHI10-18-215T	10	215T	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	70	180
Explosion proof Features XL Model	IXHHI10-12-256T	10	256T	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	350
	IXHHI15-36-254T	15	254T	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	79	310
Severe duty Performances HSDE Model	IXHHI15-18-254T	15	254T	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	74	310
	IXHHI15-12-284T	15	284T	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	66	440
Explosion proof Features XL Model	IXHHI20-36-256T	20	256T	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	79	350
	IXHHI20-18-256T	20	256T	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	74	350
Severe duty Performances HSDE Model	IXHHI20-12-286T	20	286T	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	68	480
	IXHHI25-36-284TS	25	284TS	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	86	440
Explosion proof Features XL Model	IXHHI25-18-284T	25	284T	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	77	440
	IXHHI25-12-324T	25	324T	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	70	820
Severe duty Performances HSDE Model	IXHHI30-36-286TS	30	286TS	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	86	480
	IXHHI30-18-286T	30	286T	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	77	480
Explosion proof Features XL Model	IXHHI30-12-326T	30	326T	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	70	840
	IXHHI40-36-324TS	40	324TS	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	86	800
Severe duty Performances HSDE Model	IXHHI40-18-324T	40	324T	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	77	820
	IXHHI40-12-364T	40	364T	1185	230/460	94.1	0.82	97.6/48.8	680	178.36	150	220	73	1113
Explosion proof Features XL Model	IXHHI50-36-326TS	50	326TS	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	86	820
	IXHHI50-18-326T	50	326T	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	77	840
Severe duty Performances HSDE Model	IXHHI50-12-365T	50	365T	1185	230/460	94.1	0.82	120.4/60.2	680	219.98	150	220	73	1173
	IXHHI60-36-364TS	60	364TS	3570	230/460	94.1	0.92	131.2/65.6	680	88.81	140	220	82	1047
Explosion proof Features XL Model	IXHHI60-18-364T	60	364T	1780	230/460	95.0	0.85	139.9/69.9	670	178.11	150	220	82	1113
	IXHHI60-12-404T	60	404T	1185	230/460	94.5	0.84	142.3/71.2	670	267.54	140	220	75	1532
Severe duty Performances HSDE Model	IXHHI75-36-365TS	75	365TS	3570	230/460	94.5	0.92	159.7/79.8	680	108.54	140	220	82	1087
	IXHHI75-18-365T	75	365T	1780	230/460	95.4	0.85	170.3/85.1	690	217.69	150	220	82	1153
Explosion proof Features XL Model	IXHHI75-12-405T	75	405T	1185	230/460	94.5	0.84	173.9/87	680	326.99	140	220	75	1830
	IXHHI100-36-405TS	100	405TS	3570	230/460	94.5	0.91	220.1/110.1	700	148.01	120	220	87	1852
Severe duty Performances HSDE Model	IXHHI100-18-405T	100	405T	1780	230/460	95.4	0.87	228.1/114.1	650	296.85	140	220	82	1830
	IXHHI100-12-444T	100	444T	1185	230/460	95	0.85	233.1/116.6	680	445.90	140	220	80	2116
Explosion proof Features XL Model	IXHHI125-36-444TS	125	444TS	3570	230/460	95	0.90	278.9/139.5	700	187.48	120	220	92	2006
	IXHHI125-18-444T	125	444T	1785	230/460	95.4	0.88	284.1/142	700	374.96	140	220	85	2116
Severe duty Performances HSDE Model	IXHHI125-12-445T	125	445T	1185	230/460	95	0.85	295.3/147.7	675	564.81	140	220	80	2293
	IXHHI150-36-445TS	150	445TS	3570	460	95	0.90	323/161.5	700	217.08	120	220	92	2249
Explosion proof Features XL Model	IXHHI150-18-445T	150	445T	1785	460	95.8	0.88	327.5/163.8	700	434.16	140	220	85	2293
	IXHHI150-12-447T	150	447T	1185	460	95.8	0.85	339.1/169.5	680	653.99	140	220	80	2756
Severe duty Performances HSDE Model	IXHHI200-36-447TS	200	447TS	3570	460	95.4	0.90	438.5/219.3	700	296.02	120	220	92	2690
	IXHHI200-18-447T	200	447T	1785	460	96.2	0.88	444.8/222.4	700	592.04	140	220	85	2756
Explosion proof Features XL Model	IXHHI200-12-449T	200	449T	1185	460	95.8	0.85	462.4/231.2	680	891.80	140	220	80	3086
	IXHHI250-36-449TS	250	449TS	3570	460	95.8	0.90	553.2/276.6	700	374.96	120	220	92	3020
Severe duty Performances HSDE Model	IXHHI250-18-449T	250	449T	1785	460	96.2	0.88	563.4/281.7	700	749.91	140	220	85	3086

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.

IXHHI Model - Explosion proof, Premium Efficiency Three phase, TEFC, C-Face, Foot mounted



Features

- Insulation Class F, Temperature rise B, 40 °C ambient
- 230/460 V (~ 125 HP), 460 V (150 HP ~ 250 HP)
- Class 1 Division 1 Group C&D Temp. code T4 with Thermostat (1 EA/Ph.)
- Cast Iron construction, Direct-on-line & Inverter duty
- IP55, Diagonally split, Gasketed terminal box, Fully rotatable at 90 increments
- Tap provision for Vib. sensor & Bearing Temp. Detector (Except Vib. sensor & Bearing Temp. Detector)

C-Face, Foot Mounted

Catalog Number	HP	Frame Number	RPM (Speed)	Volts (V)	FL EFF. (%)	FL PF	FL AMPS (A)	Locked Rotor AMPS (%)	Torque			Sound pressure Level dB(A)	Approx. Weight (LB.)
									Rated (LB.FT)	Locked Rotor %FLT	Break down %FLT		
IXHHI1-36-143TC	1	143TC	3490	230/460	77.0	0.82	2.98/1.49	830	1.51	200	270	73	64
IXHHI1-18-143TC	1	143TC	1755	230/460	85.5	0.70	3.15/1.57	930	3.01	280	310	64	64
IXHHI1-12-145TC	1	145TC	1155	230/460	82.5	0.63	3.62/1.81	800	4.57	180	275	55	66
IXHHI1.5-36-143TC	1.5	143TC	3485	230/460	84.0	0.84	3.91/1.96	1000	2.22	185	260	73	64
IXHHI1.5-18-145TC	1.5	145TC	1750	230/460	86.5	0.72	4.43/2.22	900	4.43	260	290	64	66
IXHHI1.5-12-182TC	1.5	182TC	1175	230/460	87.5	0.61	5.17/2.59	770	6.60	190	270	60	112
IXHHI2-36-145TC	2	145TC	3480	230/460	85.5	0.85	5.18/2.59	950	3.04	180	250	73	66
IXHHI2-18-145TC	2	145TC	1745	230/460	86.5	0.73	5.96/2.98	830	6.06	245	280	64	66
IXHHI2-12-184TC	2	184TC	1175	230/460	88.5	0.68	6.26/3.13	790	8.99	180	260	60	121
IXHHI3-36-182TC	3	182TC	3520	230/460	86.5	0.85	7.51/3.76	760	4.40	190	260	73	112
IXHHI3-18-182TC	3	182TC	1770	230/460	89.5	0.79	7.81/3.91	930	8.76	220	280	64	112
IXHHI3-12-213TC	3	213TC	1185	230/460	89.5	0.67	9.21/4.6	770	13.08	180	250	60	160
IXHHI5-36-184TC	5	184TC	3515	230/460	88.5	0.86	12.2/6.1	800	7.42	190	260	73	121
IXHHI5-18-184TC	5	184TC	1760	230/460	89.5	0.80	12.97/6.49	840	14.81	210	260	64	121
IXHHI5-12-215TC	5	215TC	1180	230/460	89.5	0.68	15.26/7.63	680	22.09	170	220	62	180
IXHHI7.5-36-213TC	7.5	213TC	3530	230/460	89.5	0.85	18.15/9.07	700	10.98	160	260	76	160
IXHHI7.5-18-213TC	7.5	213TC	1775	230/460	91.7	0.77	19.55/9.78	940	21.83	190	250	69	160
IXHHI7.5-12-254TC	7.5	254TC	1175	230/460	91.0	0.75	20.23/10.11	640	32.98	170	250	64	260
IXHHI10-36-215TC	10	215TC	3525	230/460	90.2	0.86	24.27/12.13	680	14.99	160	260	76	180
IXHHI10-18-215TC	10	215TC	1770	230/460	91.7	0.79	25.99/12.99	750	29.85	180	240	70	180
IXHHI10-12-256TC	10	256TC	1175	230/460	91.0	0.75	27.58/13.79	680	44.97	170	250	64	300
IXHHI15-36-254TC	15	254TC	3550	230/460	91.0	0.88	34.5/17.2	710	21.83	150	250	79	260
IXHHI15-18-254TC	15	254TC	1775	230/460	92.4	0.82	36.4/18.2	750	43.66	200	240	74	260
IXHHI15-12-284TC	15	284TC	1175	230/460	91.7	0.77	39.1/19.6	600	65.95	155	240	66	380
IXHHI20-36-256TC	20	256TC	3550	230/460	91.0	0.89	46.5/23.2	740	29.77	150	250	79	300
IXHHI20-18-256TC	20	256TC	1775	230/460	93.0	0.82	49.7/24.8	800	59.53	200	240	74	300
IXHHI20-12-286TC	20	286TC	1175	230/460	91.7	0.77	53.3/26.7	650	89.94	150	230	68	410
IXHHI25-36-284TSC	25	284TSC	3560	230/460	91.7	0.89	56.9/28.5	670	36.61	160	230	86	380
IXHHI25-18-284TC	25	284TC	1775	230/460	93.6	0.81	61.3/30.6	790	73.43	170	220	77	380
IXHHI25-12-324TC	25	324TC	1175	230/460	93.0	0.80	62.4/31.2	720	110.92	170	210	70	550
IXHHI30-36-286TSC	30	286TSC	3560	230/460	91.7	0.89	67.7/33.8	685	43.54	160	230	86	410
IXHHI30-18-286TC	30	286TC	1775	230/460	93.6	0.81	72.8/36.4	740	87.32	170	220	77	410
IXHHI30-12-326TC	30	326TC	1175	230/460	93.0	0.80	74.2/37.1	830	131.91	170	210	70	560
IXHHI40-36-324TSC	40	324TSC	3560	230/460	92.4	0.92	89.1/44.5	850	59.37	150	230	86	530
IXHHI40-18-324TC	40	324TC	1780	230/460	94.1	0.82	97.6/48.8	850	118.74	170	220	77	550
IXHHI50-36-326TSC	50	326TSC	3560	230/460	93.0	0.92	109.1/54.6	850	73.22	150	230	86	540
IXHHI50-18-326TC	50	326TC	1780	230/460	94.5	0.84	117/58.5	830	146.44	170	220	77	560

※ For Electrical performances of 575 V Motor(s), please inquire with us, HD Hyundai Electric America.
※ Remarks

1. Applicable to the following mounting type.
1) C-face without Foot (Fr. 143 - 326)
2) Vertical, C-face without Foot (Fr. 143 - 326)

HES Model - Severe duty, Premium Efficiency Three phase, TEFC, Foot mounted




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Shaft & Keyway					Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				U	N-W	R	S	ES		
143T	3.5	5.5	1.47	6.81	0.47	(5)	4	6.14	2.25	0.34	11.03	8.8	12.97	0.875	2.25	0.771	0.188	1.41	3/4"	A
145T	3.5	5.5	1.47	6.81	0.47	5	(4)	6.14	2.25	0.34	11.03	8.8	12.97	0.875	2.25	0.771	0.188	1.41	3/4"	
182T	4.5	7.5	1.64	8.65	0.6	(5.5)	4.5	6.69	2.75	0.41	12.79	10.73	15.59	1.125	2.75	0.986	0.25	1.78	3/4"	
184T	4.5	7.5	1.64	8.65	0.6	5.5	(4.5)	6.69	2.75	0.41	12.79	10.73	15.59	1.125	2.75	0.986	0.25	1.78	3/4"	
213T	5.25	8.5	1.69	9.88	0.66	5.5	-	6.69	3.5	0.41	14.56	12.32	18.31	1.375	3.38	1.201	0.312	2.41	1"	
215T	5.25	8.5	1.72	9.91	0.68	7	-	8.19	3.5	0.41	14.56	12.32	19.73	1.375	3.38	1.201	0.312	2.41	1"	
254T	6.25	10	2.13	11.69	0.72	8.25	-	9.57	4.25	0.53	18.43	14.75	23.54	1.625	4.00	1.416	0.375	2.91	1 1/4"	
256T	6.25	10	2.13	11.69	0.72	10	-	11.30	4.25	0.53	18.43	14.75	25.28	1.625	4.00	1.416	0.375	2.91	1 1/4"	
284TS	7	11	2.40	12.99	0.78	9.5	-	11.18	4.75	0.53	19.84	16.25	25.35	1.625	3.25	1.416	0.375	1.91	1 1/2"	
284T	7	11	2.40	12.99	0.78	9.5	-	11.18	4.75	0.53	19.84	16.25	26.72	1.875	4.62	1.591	0.5	3.28	1 1/2"	
286TS	7	11	2.40	12.99	0.78	11	-	12.68	4.75	0.53	19.84	16.25	27.28	1.625	3.25	1.416	0.375	1.91	1 1/2"	
286T	7	11	2.40	12.99	0.78	11	-	12.68	4.75	0.53	19.84	16.25	28.22	1.875	4.62	1.591	0.5	3.28	1 1/2"	
324TS	8	12.5	2.52	14.72	1.03	(12)	10.5	13.78	5.25	0.66	23.18	18.55	29.72	1.875	3.75	1.591	0.5	2.03	2"	
324T	8	12.5	2.52	14.72	1.03	(12)	10.5	13.78	5.25	0.66	23.18	18.55	31.22	2.125	5.25	1.845	0.5	3.91	2"	
326TS	8	12.5	2.52	14.72	1.03	12	(10.5)	13.78	5.25	0.66	23.18	18.55	29.72	1.875	3.75	1.591	0.5	2.03	2"	
326T	8	12.5	2.52	14.72	1.03	12	(10.5)	13.78	5.25	0.66	23.18	18.55	31.22	2.125	5.25	1.845	0.5	3.91	2"	

Fig. A
143 - 326Fr.

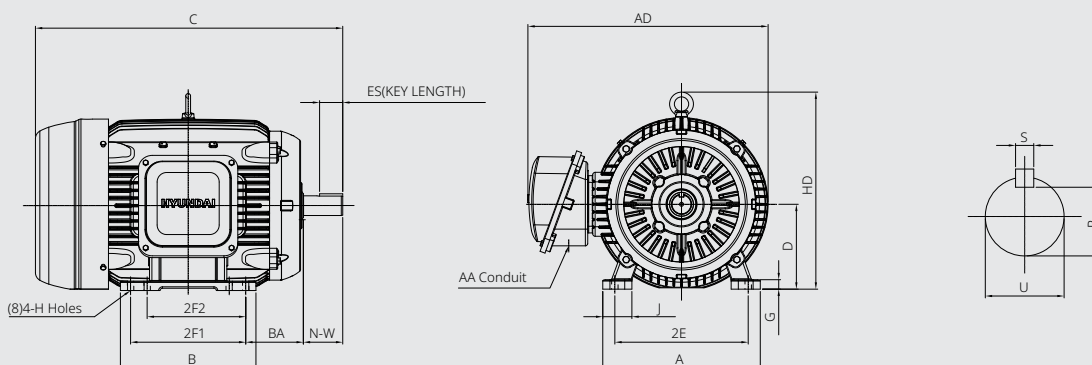

HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, Foot mounted



Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Shaft & Keyway					Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				U	N-W	R	S	ES		
364TS	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.24	21.3	31.88	1.875	3.75	1.591	0.5	2.03	2 1/2"	A
364T	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.24	21.3	34.01	2.375	5.88	2.021	0.625	4.28	3"	
365TS	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.24	21.3	31.88	1.875	3.75	1.591	0.5	2.03	2 1/2"	
365T	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.24	21.3	34.01	2.375	5.88	2.021	0.625	4.28	3"	
404T	10	16	3.03	18.43	1.18	(13.75)	12.25	16.46	6.62	0.81	30.36	24.34	39.42	2.875	7.25	2.45	0.75	5.65	3"	B
405TS	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.36	24.34	36.42	2.125	4.25	1.845	0.5	2.8	3"	
405T	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.36	24.34	39.42	2.875	7.25	2.45	0.75	5.65	3"	
444TS	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.46	27.52	41.46	2.375	4.75	2.021	0.625	3.03	3"	
444T	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.46	27.52	45.21	3.375	8.5	2.88	0.875	6.93	3"	
445TS	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.46	27.52	41.46	2.375	4.75	2.021	0.625	3.03	3"	
445T	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.46	27.52	45.21	3.375	8.5	2.88	0.875	6.93	3"	
447TS	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	32.46	27.52	44.96	2.375	4.75	2.021	0.625	3.03	3"	
447T	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	32.46	27.52	48.71	3.375	8.5	2.88	0.875	6.93	3"	
449TS	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	32.46	27.52	50.08	2.375	4.75	2.021	0.625	3.03	3"	
449T	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	32.46	27.52	53.83	3.375	8.5	2.88	0.875	6.93	3"	

Fig. A
364/5Fr.



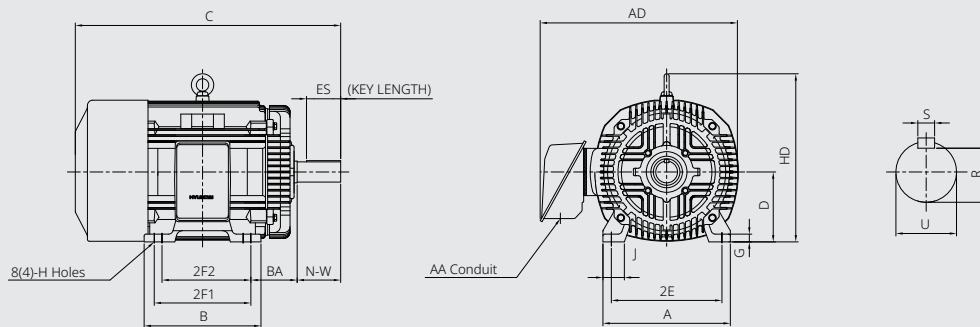


Fig. B
404 - 449Fr.

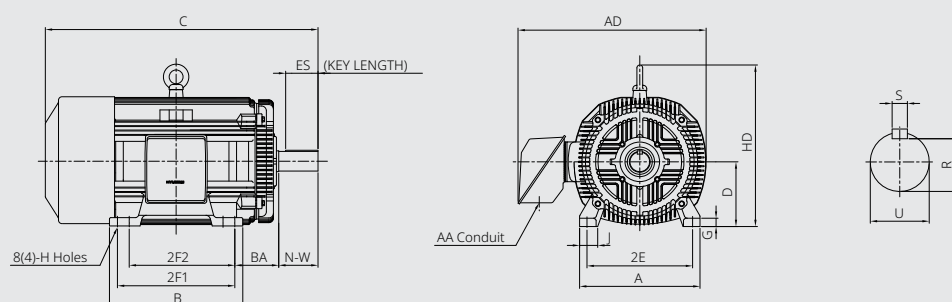

HSDE Model - Severe duty, Premium Efficiency, Large Motor Three phase, TEFC, Foot mounted



Features

- Cast-iron terminal box
 - Fully rotatable at 90 increments
- Fabricated steel terminal box (Fr. 5812)

Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Shaft & Keyway					Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				U	N-W	R	S	ES		
L449TS	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	55.89	2.375	4.75	2.021	0.625	3.03	4"	A
L449T-4P	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	55.18	3.375	8.5	2.88	0.875	6.93	4"	
L449T-6P	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	59.98	3.375	8.5	2.88	0.875	6.93	4"	
5008S	12.5	20	4.88	25.04	1.26	(28)	25	33.07	8.5	0.94	42.01	36.3	62.03	2.625	5.75	2.275	0.625	4	4"	
5008	12.5	20	4.88	25.04	1.26	(28)	25	33.07	8.5	0.94	42.01	36.3	67.96	3.875	11.625	3.309	1	10	4"	
5009S	12.5	20	4.88	25.04	1.26	28	(25)	33.07	8.5	0.94	42.01	36.3	62.03	2.625	5.75	2.275	0.625	4	4"	
5009	12.5	20	4.88	25.04	1.26	28	(25)	33.07	8.5	0.94	42.01	36.3	67.96	3.875	11.625	3.309	1	10	4"	
5010S	12.5	20	4.88	25.04	1.26	(36)	32	41	8.5	0.94	42.01	36.3	67.54	2.625	5.75	2.275	0.625	4	4"	
5010	12.5	20	4.88	25.04	1.26	(36)	32	41	8.5	0.94	42.01	36.3	70.84	3.875	11.625	3.309	1	10	4"	
5011S	12.5	20	4.88	25.04	1.26	36	(32)	41	8.5	0.94	42.01	36.3	67.54	2.625	5.75	2.275	0.625	4	4"	
5011	12.5	20	4.88	25.04	1.26	36	(32)	41	8.5	0.94	42.01	36.3	70.84	3.875	11.625	3.309	1	10	4"	B
5812S-2P	14.5	23	5.85	29.53	1.97	45	40	51.77	10	1.18	51.87	40.4	82.04	2.875	6.75	2.45	0.75	6.55	4"	
5812-4P	14.5	23	5.85	29.53	1.97	45	40	51.77	10	1.18	51.87	40.4	83.6	4.375	8.3	3.817	1	8.05	4"	
5812-6P	14.5	23	5.85	29.53	1.97	45	40	51.77	10	1.18	51.87	40.4	83.6	4.375	8.3	3.817	1	8.05	4"	

Fig. A
L449 - 5011Fr.


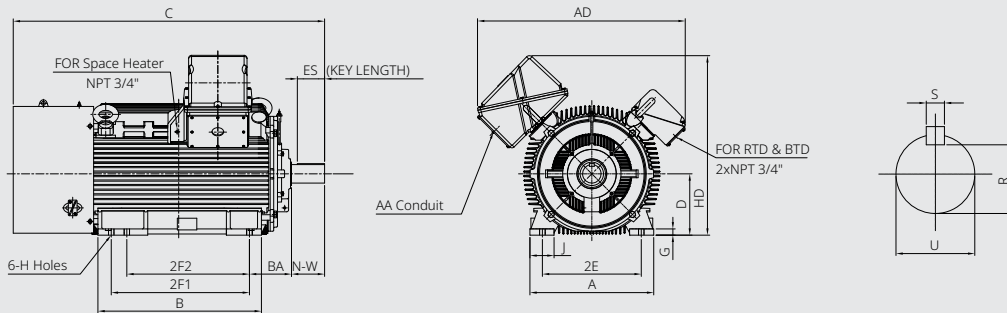


Fig. B
5812Fr.



HES Model - Severe duty, Premium Efficiency Three phase, TEFC, C-Face, Foot mounted

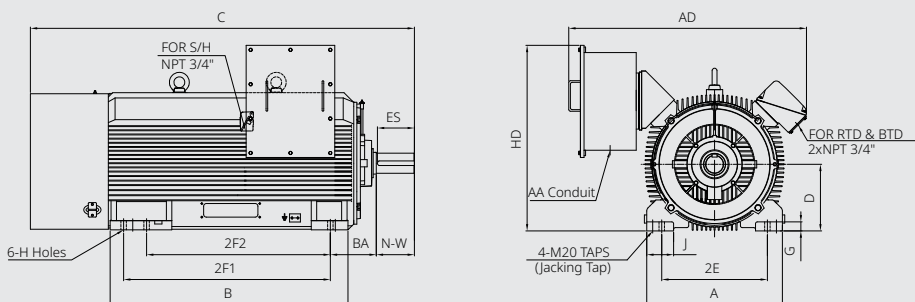

Features


- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

C-Face, Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				AA	
143TC	3.5	5.5	1.47	6.81	0.47	(5)	4	6.14	2.25	0.34	11.03	8.8	12.96	3/4"	A
145TC	3.5	5.5	1.47	6.81	0.47	5	(4)	6.14	2.25	0.34	11.03	8.8	12.96	3/4"	
182TC	4.5	7.5	1.64	8.65	0.6	(5.5)	4.5	6.69	2.75	0.41	12.79	10.73	15.59	3/4"	
184TC	4.5	7.5	1.64	8.65	0.6	5.5	(4.5)	6.69	2.75	0.41	12.79	10.73	15.59	3/4"	
213TC	5.25	8.5	1.72	9.91	0.68	5.5	-	6.69	3.5	0.41	14.56	12.32	18.31	1"	
215TC	5.25	8.5	1.72	9.91	0.68	7	-	8.19	3.5	0.41	14.56	12.32	19.73	1"	
254TC	6.25	10	2.13	11.69	0.72	8.25	-	9.57	4.25	0.53	18.43	14.75	23.54	1 1/4"	
256TC	6.25	10	2.13	11.69	0.72	10	-	11.30	4.25	0.53	18.43	14.75	25.27	1 1/4"	
284TSC	7	11	2.40	12.99	0.78	9.5	-	11.18	4.75	0.53	19.84	16.25	25.35	1 1/2"	
284TC	7	11	2.40	12.99	0.78	9.5	-	11.18	4.75	0.53	19.84	16.25	26.72	1 1/2"	
286TSC	7	11	2.40	12.99	0.78	11	-	12.68	4.75	0.53	19.84	16.25	26.84	1 1/2"	
286TC	7	11	2.40	12.99	0.78	11	-	12.68	4.75	0.53	19.84	16.25	28.21	1 1/2"	
324TSC	8	12.5	2.52	14.72	1.03	(12)	10.5	13.78	5.25	0.66	23.18	18.55	29.72	2"	
324TC	8	12.5	2.52	14.72	1.03	(12)	10.5	13.78	5.25	0.66	23.18	18.55	31.22	2"	
326TSC	8	12.5	2.52	14.72	1.03	12	(10.5)	13.78	5.25	0.66	23.18	18.55	29.72	2"	
326TC	8	12.5	2.52	14.72	1.03	12	(10.5)	13.78	5.25	0.66	23.18	18.55	31.22	2"	

Frame Size	C-Face								Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	U	N-W	R	S	ES(Length)	
143TC	5.875	4.50	0.18	0.12	6.5	3/8-16	4	0.56	0.875	2.25	0.771	0.188	1.41	A
145TC	5.875	4.50	0.18	0.12	6.5	3/8-16	4	0.56	0.875	2.25	0.771	0.188	1.41	
182TC	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	1.125	2.75	0.986	0.25	1.78	
184TC	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	1.125	2.75	0.986	0.25	1.78	
213TC	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	1.375	3.38	1.201	0.312	2.41	
215TC	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	1.375	3.38	1.201	0.312	2.41	
254TC	7.25	8.50	0.28	0.25	9.25	1/2-13	4	0.75	1.625	4.00	1.416	0.375	2.91	
256TC	7.25	8.50	0.28	0.25	9.25	1/2-13	4	0.75	1.625	4.00	1.416	0.375	2.91	
284TSC	9.0	10.50	0.28	0.25	11.02	1/2-13	4	0.75	1.625	3.25	1.416	0.375	1.91	
284TC	9.0	10.50	0.28	0.25	11.02	1/2-13	4	0.75	1.875	4.62	1.591	0.5	3.28	
286TSC	9.0	10.50	0.28	0.25	11.02	1/2-13	4	0.75	1.625	3.25	1.416	0.375	1.91	
286TC	9.0	10.50	0.28	0.25	11.02	1/2-13	4	0.75	1.875	4.62	1.591	0.5	3.28	
324TSC	11.0	12.50	0.28	0.25	12.99	5/8-11	4	0.94	1.875	3.75	1.591	0.5	2.03	
324TC	11.0	12.50	0.28	0.25	12.99	5/8-11	4	0.94	2.125	5.25	1.845	0.5	3.91	
326TSC	11.0	12.50	0.28	0.25	12.99	5/8-11	4	0.94	1.875	3.75	1.591	0.5	2.03	
326TC	11.0	12.50	0.28	0.25	12.99	5/8-11	4	0.94	2.125	5.25	1.845	0.5	3.91	

Fig. A
143 - 326Fr.

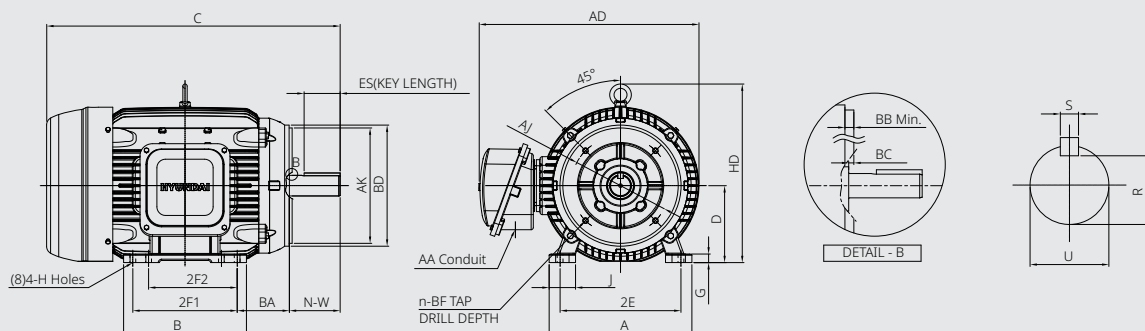

HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, C-Face, Foot mounted



Features


- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

C-Face, Foot Mounted NEMA Dimensions


Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				AA	
364TSC	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.01	36.25	31.88	3"	A
364TC	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.01	36.25	34.01	3"	
365TSC	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.01	36.25	31.88	3"	
365TC	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.01	36.25	34.01	3"	
404TC	10	16	3.03	18.43	1.18	(13.75)	12.25	16.46	6.62	0.81	30.13	40.48	39.42	3"	
405TSC	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.13	40.48	36.42	3"	
405TC	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.13	40.48	39.42	3"	
444TSC	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.48	45.63	41.46	3"	
444TC	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.48	45.63	45.21	3"	
445TSC	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.48	45.63	41.46	3"	
445TC	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.48	45.63	45.21	3"	
447TSC	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	32.48	45.63	44.96	3"	
447TC	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	32.48	45.63	48.71	3"	
449TSC	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	32.48	45.63	50.08	3"	
449TC	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	32.48	45.63	53.83	3"	

Frame Size	C-Face								Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	U	N-W	R	S	ES(Length)	
364TSC	11	12.5	0.25	0.25	13.54	5/8-11	8	0.94	1.875	3.75	1.591	0.5	2.03	A
364TC	11	12.5	0.25	0.25	13.54	5/8-11	8	0.94	2.375	5.88	2.021	0.625	4.28	
365TSC	11	12.5	0.25	0.25	13.54	5/8-11	8	0.94	1.875	3.75	1.591	0.5	2.03	
365TC	11	12.5	0.25	0.25	13.54	5/8-11	8	0.94	2.375	5.88	2.021	0.625	4.28	
404TC	11	12.5	0.25	0.25	13.94	5/8-11	8	0.94	2.875	7.25	2.45	0.75	5.65	
405TSC	11	12.5	0.25	0.25	13.94	5/8-11	8	0.94	2.125	4.25	1.845	0.5	2.8	
405TC	11	12.5	0.25	0.25	13.94	5/8-11	8	0.94	2.875	7.25	2.45	0.75	5.65	
444TSC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	
444TC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	
445TSC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	
445TC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	
447TSC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	
447TC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	
449TSC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	
449TC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	

Fig. A
364 - 449Fr.

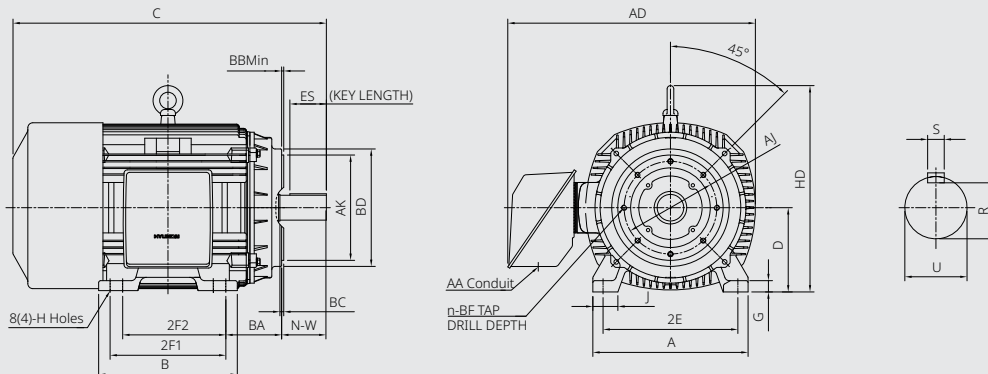

HSDE Model - Severe duty, Premium Efficiency, Large Motor Three phase, TEFC, C-Face, Foot mounted



Features


- Cast-iron terminal box
 - Fully rotatable at 90 increments
- Fabricated steel terminal box (Fr. 5812)

C-Face, Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H					
L449TSC	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	55.89	4"	A
L449TC-4P	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	55.18	4"	
L449TC-6P	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	59.98	4"	
5008SC	12.5	20	4.88	25.04	1.26	(28)	25	33.07	8.5	0.94	42.01	36.3	62.03	4"	
5008C	12.5	20	4.88	25.04	1.26	(28)	25	33.07	8.5	0.94	42.01	36.3	67.96	4"	
5009SC	12.5	20	4.88	25.04	1.26	28	(25)	33.07	8.5	0.94	42.01	36.3	62.03	4"	
5009C	12.5	20	4.88	25.04	1.26	28	(25)	33.07	8.5	0.94	42.01	36.3	67.96	4"	
5010SC	12.5	20	4.88	25.04	1.26	(36)	32	41	8.5	0.94	42.01	36.3	67.54	4"	
5010C	12.5	20	4.88	25.04	1.26	(36)	32	41	8.5	0.94	42.01	36.3	70.84	4"	
5011SC	12.5	20	4.88	25.04	1.26	36	(32)	41	8.5	0.94	42.01	36.3	67.54	4"	
5011C	12.5	20	4.88	25.04	1.26	36	(32)	41	8.5	0.94	42.01	36.3	70.84	4"	

Frame Size	C-Face									Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH		U	N-W	R	S	ES(Length)	
L449TSC	14	16	0.25	0.25	18	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03		A
L449TC-4P	14	16	0.25	0.25	18	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93		
L449TC-6P	14	16	0.25	0.25	18	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93		
5008SC	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	2.625	5.75	2.275	0.625	4		
5008C	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	3.875	11.625	3.309	1	10		
5009SC	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	2.625	5.75	2.275	0.625	4		
5009C	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	3.875	11.625	3.309	1	10		
5010SC	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	2.625	5.75	2.275	0.625	4		
5010C	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	3.875	11.625	3.309	1	10		
5011SC	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	2.625	5.75	2.275	0.625	4		
5011C	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	3.875	11.625	3.309	1	10		

Fig. A
L449 - 5011Fr.

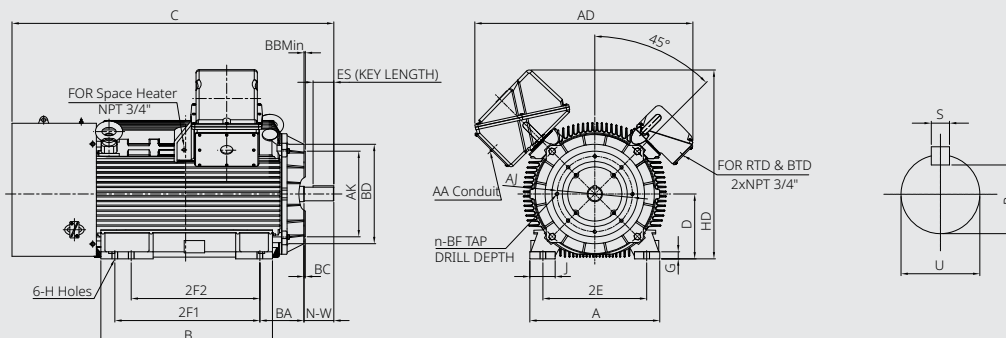

HES Model - Severe duty, Premium Efficiency Three phase, TEFC, D-Flange, Foot mounted



Features


- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

D-Flange, Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H					
143TD	3.5	5.5	1.49	6.88	0.48	(5)	4	6.14	2.25	0.34	12.46	11	12.96	3/4"	A
145TD	3.5	5.5	1.49	6.88	0.48	5	(4)	6.14	2.25	0.34	12.46	11	12.96	3/4"	
182TD	4.5	7.5	1.64	8.65	0.6	(5.5)	4.5	6.69	2.75	0.41	13.42	11.74	15.59	3/4"	
184TD	4.5	7.5	1.64	8.65	0.6	5.5	(4.5)	6.69	2.75	0.41	13.42	11.74	15.59	3/4"	
213TD	5.25	8.5	1.72	9.91	0.68	5.5	-	6.69	3.5	0.41	14.7	12.57	18.31	1"	
215TD	5.25	8.5	1.72	9.91	0.68	7	-	8.19	3.5	0.41	14.7	12.57	19.79	1"	
254TD	6.25	10	2.13	11.69	0.72	8.25	-	9.57	4.25	0.53	18.51	15.39	23.54	1 1/4"	
256TD	6.25	10	2.13	11.69	0.72	10	-	11.30	4.25	0.53	18.51	15.39	25.27	1 1/4"	
284TSD	7	11	2.40	12.99	0.78	9.5	-	11.18	4.75	0.53	19.84	16.51	25.35	1 1/2"	
284TD	7	11	2.40	12.99	0.78	9.5	-	11.18	4.75	0.53	19.84	16.51	26.72	1 1/2"	
286TSD	7	11	2.40	12.99	0.78	11	-	12.68	4.75	0.53	19.84	16.51	26.84	1 1/2"	
286TD	7	11	2.40	12.99	0.78	11	-	12.68	4.75	0.53	19.84	16.51	28.21	1 1/2"	
324TSD	8	12.5	2.52	14.72	1.03	(12)	10.5	13.78	5.25	0.66	24.14	19.41	29.72	2"	
324TD	8	12.5	2.52	14.72	1.03	(12)	10.5	13.78	5.25	0.66	24.14	19.41	31.22	2"	
326TSD	8	12.5	2.52	14.72	1.03	12	(10.5)	13.78	5.25	0.66	24.14	19.41	29.72	2"	
326TD	8	12.5	2.52	14.72	1.03	12	(10.5)	13.78	5.25	0.66	24.14	19.41	31.22	2"	

Frame Size	D-Flange						Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	U	N-W	R	S	ES(Length)	
143TD	10.00	9.00	0.25	11	0.53	4	0.875	2.25	0.771	0.188	1.41	A
145TD	10.00	9.00	0.25	11	0.53	4	0.875	2.25	0.771	0.188	1.41	
182TD	10.00	9.00	0.25	11	0.53	4	1.125	2.75	0.986	0.25	1.78	
184TD	10.00	9.00	0.25	11	0.53	4	1.125	2.75	0.986	0.25	1.78	
213TD	10.00	9.00	0.25	11	0.53	4	1.375	3.38	1.201	0.312	2.41	
215TD	10.00	9.00	0.25	11	0.53	4	1.375	3.38	1.201	0.312	2.41	
254TD	12.50	11.00	0.25	13.78	0.81	4	1.625	4.00	1.416	0.375	2.91	
256TD	12.50	11.00	0.25	13.78	0.81	4	1.625	4.00	1.416	0.375	2.91	
284TSD	12.50	11.00	0.25	13.78	0.81	4	1.625	3.25	1.416	0.375	1.91	
284TD	12.50	11.00	0.25	13.78	0.81	4	1.875	4.62	1.591	0.5	3.28	
286TSD	12.50	11.00	0.25	13.78	0.81	4	1.625	3.25	1.416	0.375	1.91	
286TD	12.50	11.00	0.25	13.78	0.81	4	1.875	4.62	1.591	0.5	3.28	
324TSD	16.00	14.00	0.25	17.72	0.81	4	1.875	3.75	1.591	0.5	2.03	
324TD	16.00	14.00	0.25	17.72	0.81	4	2.125	5.25	1.845	0.5	3.91	
326TSD	16.00	14.00	0.25	17.72	0.81	4	1.875	3.75	1.591	0.5	2.03	
326TD	16.00	14.00	0.25	17.72	0.81	4	2.125	5.25	1.845	0.5	3.91	

Fig. A
143 - 326Fr.

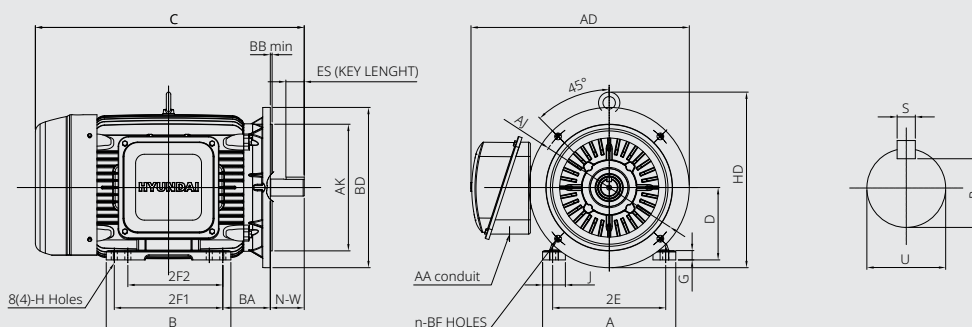

HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, D-Flange, Foot mounted



Features


- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

D-Flange, Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H					
364TSD	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.01	36.25	31.88	3"	A
364TD	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.01	36.25	34.01	3"	
365TSD	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.01	36.25	31.88	3"	
365TD	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.01	36.25	34.01	3"	
404TD	10	16	3.03	18.43	1.18	(13.75)	12.25	16.46	6.62	0.81	30.13	40.48	39.42	3"	
405TSD	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.13	40.48	36.42	3"	
405TD	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.13	40.48	39.42	3"	
444TSD	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.48	45.63	41.46	3"	
444TD	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.48	45.63	45.21	3"	
445TSD	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.48	45.63	41.46	3"	
445TD	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.48	45.63	45.21	3"	
447TSD	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	32.48	45.63	44.96	3"	
447TD	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	32.48	45.63	48.71	3"	
449TSD	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	32.48	45.63	50.08	3"	
449TD	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	32.48	45.63	53.83	3"	

Frame Size	D-Flange						Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	U	N-W	R	S	ES(Length)	
364TSD	16	14	0.25	17.99	0.81	8	1.875	3.75	1.591	0.5	2.03	A
364TD	16	14	0.25	17.99	0.81	8	2.375	5.88	2.021	0.625	4.28	
365TSD	16	14	0.25	17.99	0.81	8	1.875	3.75	1.591	0.5	2.03	
365TD	16	14	0.25	17.99	0.81	8	2.375	5.88	2.021	0.625	4.28	
404TD	20	18	0.25	21.65	0.81	8	2.875	7.25	2.45	0.75	5.65	
405TSD	20	18	0.25	21.65	0.81	8	2.125	4.25	1.845	0.5	2.8	
405TD	20	18	0.25	21.65	0.81	8	2.875	7.25	2.45	0.75	5.65	
444TSD	20	18	0.25	22	0.81	8	2.375	4.75	2.021	0.625	3.03	
444TD	20	18	0.25	22	0.81	8	3.375	8.5	2.88	0.875	6.93	
445TSD	20	18	0.25	22	0.81	8	2.375	4.75	2.021	0.625	3.03	
445TD	20	18	0.25	22	0.81	8	3.375	8.5	2.88	0.875	6.93	
447TSD	20	18	0.25	22	0.81	8	2.375	4.75	2.021	0.625	3.03	
447TD	20	18	0.25	22	0.81	8	3.375	8.5	2.88	0.875	6.93	
449TSD	20	18	0.25	22	0.81	8	2.375	4.75	2.021	0.625	3.03	
449TD	20	18	0.25	22	0.81	8	3.375	8.5	2.88	0.875	6.93	

Fig. A
364 - 449Fr.

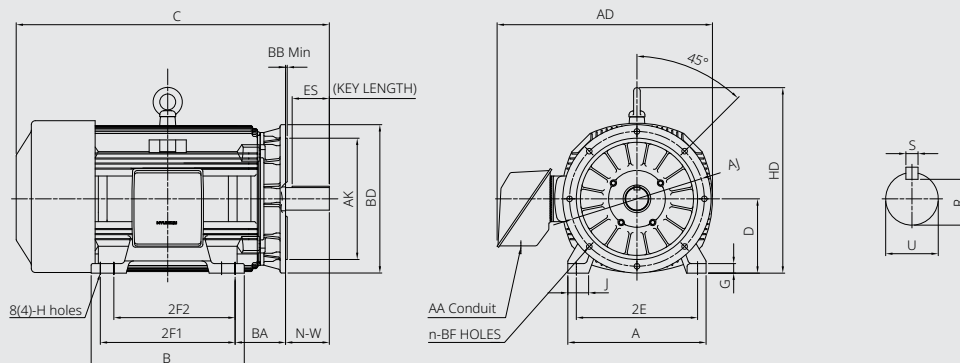

HES Model - Severe duty, Premium Efficiency Three phase, TEFC, C-Face, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

C-Face, Footless NEMA Dimensions

Frame Size	C-Face								Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
143TCRD	5.875	4.50	0.18	0.12	6.50	3/8-16	4	0.56	11.03	9.30	12.96	3/4"	0.875	2.25	0.771	0.188	1.41	A
145TCRD	5.875	4.50	0.18	0.12	6.50	3/8-16	4	0.56	11.03	9.30	12.96	3/4"	0.875	2.25	0.771	0.188	1.41	
182TCRD	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	12.79	11.15	15.59	3/4"	1.125	2.75	0.986	0.250	1.78	
184TCRD	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	12.79	11.15	15.59	3/4"	1.125	2.75	0.986	0.250	1.78	
213TCRD	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	14.56	12.09	18.31	1"	1.375	3.38	1.201	0.312	2.41	
215TCRD	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	14.56	12.09	19.73	1"	1.375	3.38	1.201	0.312	2.41	
254TCRD	7.25	8.50	0.28	0.25	9.25	1/2-13	4	0.75	18.43	14.67	23.54	1 1/4"	1.625	4.00	1.416	0.375	2.91	
256TCRD	7.25	8.50	0.28	0.25	9.25	1/2-13	4	0.75	18.43	14.67	25.27	1 1/4"	1.625	4.00	1.416	0.375	2.91	
284TSCRD	9.00	10.50	0.28	0.25	11.02	1/2-13	4	0.75	19.84	16.14	25.35	1 1/2"	1.625	3.25	1.416	0.375	1.91	
284TCRD	9.00	10.50	0.28	0.25	11.02	1/2-13	4	0.75	19.84	16.14	26.72	1 1/2"	1.875	4.62	1.591	0.500	3.28	
286TSCRD	9.00	10.50	0.28	0.25	11.02	1/2-13	4	0.75	19.84	16.14	26.84	1 1/2"	1.625	3.25	1.416	0.375	1.91	
286TCRD	9.00	10.50	0.28	0.25	11.02	1/2-13	4	0.75	19.84	16.14	28.21	1 1/2"	1.875	4.62	1.591	0.500	3.28	
324TSCRD	11.00	12.50	0.28	0.25	12.99	5/8-11	4	0.94	23.18	18.43	29.72	2"	1.875	3.75	1.591	0.500	2.03	
324TCRD	11.00	12.50	0.28	0.25	12.99	5/8-11	4	0.94	23.18	18.43	31.22	2"	2.125	5.25	1.845	0.500	3.91	
326TSCRD	11.00	12.50	0.28	0.25	12.99	5/8-11	4	0.94	23.18	18.43	29.72	2"	1.875	3.75	1.591	0.500	2.03	
326TCRD	11.00	12.50	0.28	0.25	12.99	5/8-11	4	0.94	23.18	18.43	31.22	2"	2.125	5.25	1.845	0.500	3.91	

Fig. A
140 - 326Fr.

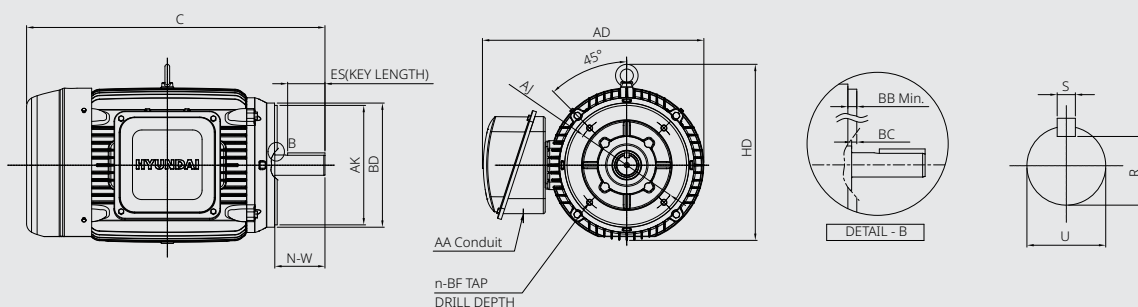

HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, C-Face, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

C-Face, Footless NEMA Dimensions

Frame Size	C-Face								Overall			Conduit Box	Shaft & Keyway						Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)		
364TSCRD	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	31.88	3"	1.875	3.75	1.591	0.500	2.03	A	
364TCRD	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	34.01	3"	2.375	5.88	2.021	0.625	4.28		
365TSCRD	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	31.88	3"	1.875	3.75	1.591	0.500	2.03		
365TCRD	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	34.01	3"	2.375	5.88	2.021	0.625	4.28		
404TCRD	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	39.42	3"	2.875	7.25	2.450	0.750	5.65		
405TSCRD	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	36.42	3"	2.125	4.25	1.845	0.500	2.80		
405TCRD	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	39.42	3"	2.875	7.25	2.450	0.750	5.65		
444TSCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	41.46	3"	2.375	4.75	2.021	0.625	3.03		
444TCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	45.21	3"	3.375	8.50	2.880	0.875	6.93		
445TSCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	41.46	3"	2.375	4.75	2.021	0.625	3.03		
445TCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	45.21	3"	3.375	8.50	2.880	0.875	6.93		
447TSCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	44.96	3"	2.375	4.75	2.021	0.625	3.03		
447TCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	48.71	3"	3.375	8.50	2.880	0.875	6.93		
449TSCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	50.08	3"	2.375	4.75	2.021	0.625	3.03		
449TCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	53.83	3"	3.375	8.50	2.880	0.875	6.93		

Fig. A
364 - 449Fr.

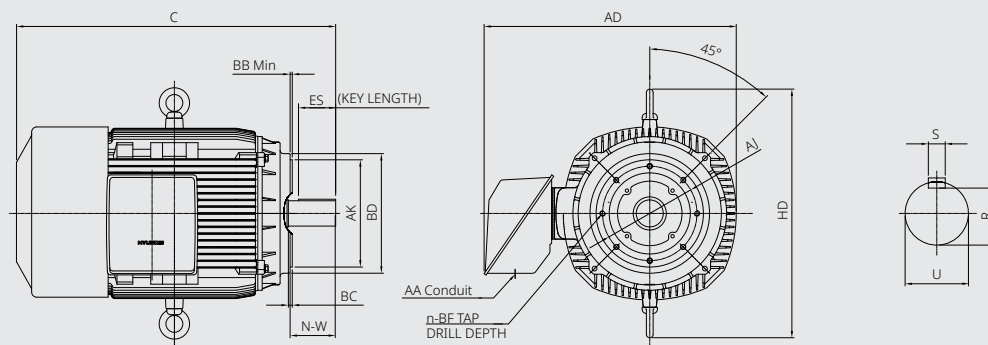

HES Model - Severe duty, Premium Efficiency Three phase, TEFC, D-Flange, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

D-Flange, Footless NEMA Dimensions

Frame Size	D-Flange						Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
143TDRD	10.00	9.00	0.25	11.00	0.53	4	12.46	11.00	12.96	3/4"	0.875	2.25	0.771	0.188	1.41	A
145TDRD	10.00	9.00	0.25	11.00	0.53	4	12.46	11.00	12.96	3/4"	0.875	2.25	0.771	0.188	1.41	
182TDRD	10.00	9.00	0.25	11.00	0.53	4	13.42	11.74	15.59	3/4"	1.125	2.75	0.986	0.25	1.78	
184TDRD	10.00	9.00	0.25	11.00	0.53	4	13.42	11.74	15.59	3/4"	1.125	2.75	0.986	0.25	1.78	
213TDRD	10.00	9.00	0.25	11.00	0.53	4	14.70	12.57	18.31	1"	1.375	3.38	1.201	0.312	2.41	
215TDRD	10.00	9.00	0.25	11.00	0.53	4	14.70	12.57	19.79	1"	1.375	3.38	1.201	0.312	2.41	
254TDRD	12.50	11.00	0.25	13.78	0.81	4	18.51	15.39	23.54	1 1/4"	1.625	4.00	1.416	0.375	2.91	
256TDRD	12.50	11.00	0.25	13.78	0.81	4	18.51	15.39	25.27	1 1/4"	1.625	4.00	1.416	0.375	2.91	
284TSDRD	12.50	11.00	0.25	13.78	0.81	4	19.84	16.14	25.35	1 1/2"	1.625	3.25	1.416	0.375	1.91	
284TDRD	12.50	11.00	0.25	13.78	0.81	4	19.84	16.14	26.72	1 1/2"	1.875	4.62	1.591	0.5	3.28	
286TSDRD	12.50	11.00	0.25	13.78	0.81	4	19.84	16.14	26.84	1 1/2"	1.625	3.25	1.416	0.375	1.91	
286TDRD	12.50	11.00	0.25	13.78	0.81	4	19.84	16.14	28.21	1 1/2"	1.875	4.62	1.591	0.5	3.28	
324TSDRD	16.00	14.00	0.25	17.72	0.81	4	24.14	19.41	29.72	2"	1.875	3.75	1.591	0.5	2.03	
324TDRD	16.00	14.00	0.25	17.72	0.81	4	24.14	19.41	31.22	2"	2.125	5.25	1.845	0.5	3.91	
326TSDRD	16.00	14.00	0.25	17.72	0.81	4	24.14	19.41	29.72	2"	1.875	3.75	1.591	0.5	2.03	
326TDRD	16.00	14.00	0.25	17.72	0.81	4	24.14	19.41	31.22	2"	2.125	5.25	1.845	0.5	3.91	

Fig. A
143 - 326Fr.

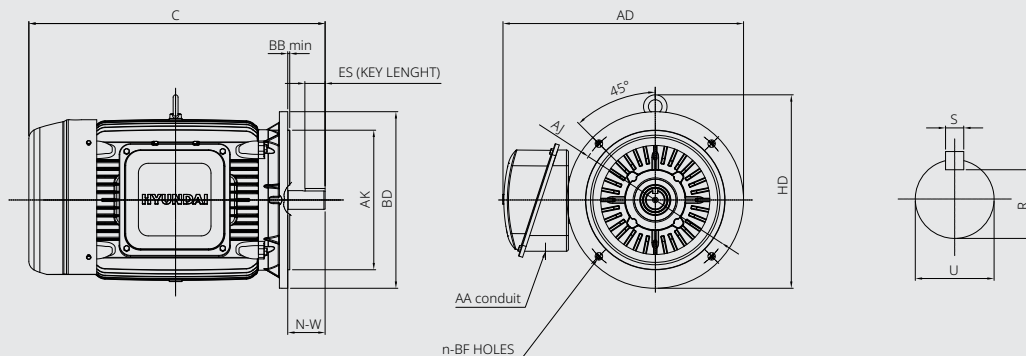

HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, D-Flange, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

D-Flange, Footless NEMA Dimensions

Frame Size	D-Flange						Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
364TSDRD	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	31.88	3"	1.875	3.75	1.591	0.5	2.03	A
364TDRD	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	34.01	3"	2.375	5.88	2.021	0.625	4.28	
365TSDRD	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	31.88	3"	1.875	3.75	1.591	0.5	2.03	
365TDRD	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	34.01	3"	2.375	5.88	2.021	0.625	4.28	
404TDRD	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	39.42	3"	2.875	7.25	2.450	0.75	5.65	
405TSDRD	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	36.42	3"	2.125	4.25	1.845	0.5	2.8	
405TDRD	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	39.42	3"	2.875	7.25	2.450	0.75	5.65	
444TSDRD	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	41.46	3"	2.375	4.75	2.021	0.625	3.03	
444TDRD	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	45.21	3"	3.375	8.50	2.880	0.875	6.93	
445TSDRD	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	41.46	3"	2.375	4.75	2.021	0.625	3.03	
445TDRD	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	45.21	3"	3.375	8.50	2.880	0.875	6.93	
447TSDRD	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	44.96	3"	2.375	4.75	2.021	0.625	3.03	
447TDRD	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	48.71	3"	3.375	8.50	2.880	0.875	6.93	
449TSDRD	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	50.08	3"	2.375	4.75	2.021	0.625	3.03	
449TDRD	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	53.83	3"	3.375	8.50	2.880	0.875	6.93	

Fig. A
364 - 449Fr.

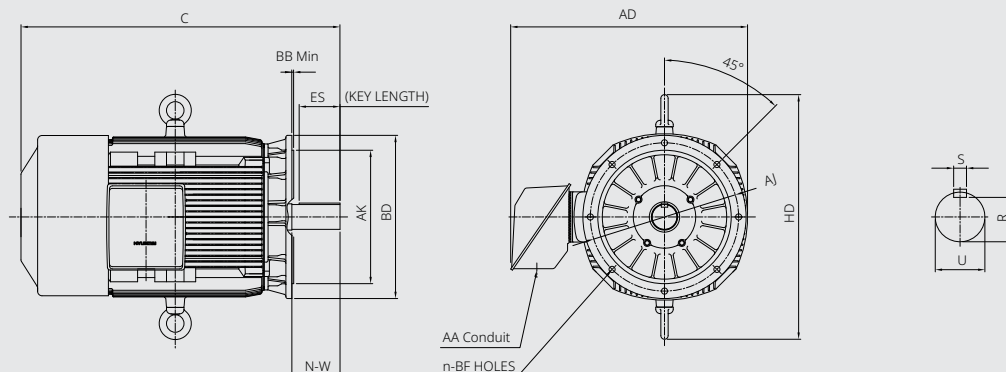

HES Model - Severe duty, Premium Efficiency Three phase, TEFC, Vertical, C-Face, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

Vertical, C-Face, Footless NEMA Dimensions

Frame Size	C-Face								Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
143TCRDV	5.875	4.50	0.18	0.12	6.50	3/8-16	4	0.56	11.03	10.60	14.15	3/4"	0.875	2.25	0.771	0.188	1.41	A
145TCRDV	5.875	4.50	0.18	0.12	6.50	3/8-16	4	0.56	11.03	10.60	14.15	3/4"	0.875	2.25	0.771	0.188	1.41	
182TCRDV	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	12.79	12.46	16.77	3/4"	1.125	2.75	0.986	0.250	1.78	
184TCRDV	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	12.79	12.46	16.77	3/4"	1.125	2.75	0.986	0.250	1.78	
213TCRDV	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	14.56	14.13	19.49	1"	1.375	3.38	1.201	0.312	2.41	
215TCRDV	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	14.56	14.13	20.97	1"	1.375	3.38	1.201	0.312	2.41	
254TCRDV	7.25	8.50	0.28	0.25	9.25	1/2-13	4	0.75	18.43	17.01	25.35	1 1/4"	1.625	4.00	1.416	0.375	2.91	
256TCRDV	7.25	8.50	0.28	0.25	9.25	1/2-13	4	0.75	18.43	17.01	27.08	1 1/4"	1.625	4.00	1.416	0.375	2.91	
284TCRDV	9.00	10.50	0.28	0.25	11.02	1/2-13	4	0.75	19.84	18.50	27.16	1 1/2"	1.625	3.25	1.416	0.375	1.91	
284TCRDV	9.00	10.50	0.28	0.25	11.02	1/2-13	4	0.75	19.84	18.50	28.53	1 1/2"	1.875	4.62	1.591	0.500	3.28	
286TCRDV	9.00	10.50	0.28	0.25	11.02	1/2-13	4	0.75	19.84	18.50	28.66	1 1/2"	1.625	3.25	1.416	0.375	1.91	
286TCRDV	9.00	10.50	0.28	0.25	11.02	1/2-13	4	0.75	19.84	18.50	30.03	1 1/2"	1.875	4.62	1.591	0.500	3.28	
324TCRDV	11.00	12.50	0.28	0.25	12.99	5/8-11	4	0.94	23.18	21.10	31.54	2"	1.875	3.75	1.591	0.500	2.03	
324TCRDV	11.00	12.50	0.28	0.25	12.99	5/8-11	4	0.94	23.18	21.10	33.04	2"	2.125	5.25	1.845	0.500	3.91	
326TCRDV	11.00	12.50	0.28	0.25	12.99	5/8-11	4	0.94	23.18	21.10	31.54	2"	1.875	3.75	1.591	0.500	2.03	
326TCRDV	11.00	12.50	0.28	0.25	12.99	5/8-11	4	0.94	23.18	21.10	33.04	2"	2.125	5.25	1.845	0.500	3.91	

Fig. A
143 - 326Fr.

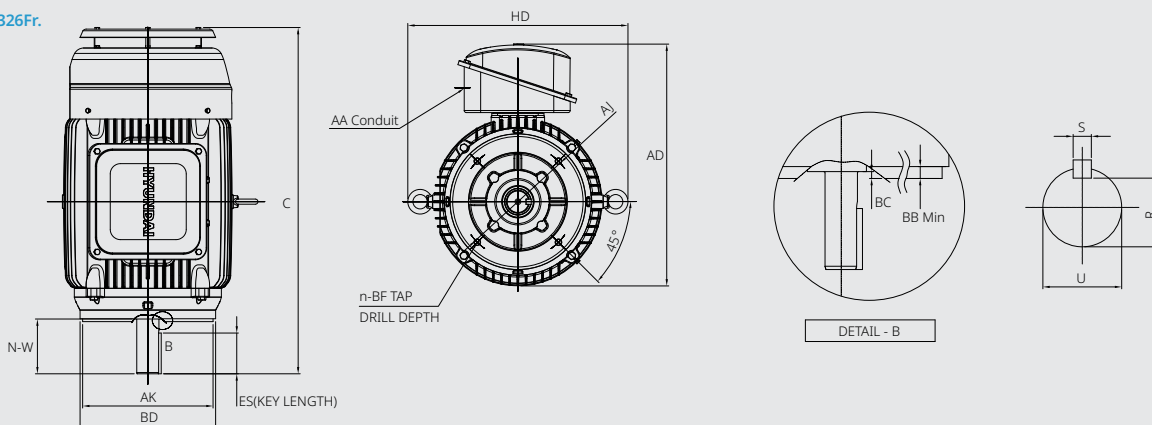

HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, Vertical, C-Face, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

Vertical, C-Face, Footless NEMA Dimensions

Frame Size	C-Face								Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
364TSCRDV	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	34.51	3"	1.875	3.75	1.591	0.500	2.03	A
364TCRDV	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	36.63	3"	2.375	5.88	2.021	0.625	4.28	
365TSCRDV	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	34.51	3"	1.875	3.75	1.591	0.500	2.03	
365TCRDV	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	36.63	3"	2.375	5.88	2.021	0.625	4.28	
404TCRDV	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	42.03	3"	2.875	7.25	2.450	0.750	5.65	
405TSCRDV	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	39.03	3"	2.125	4.25	1.845	0.500	2.80	
405TCRDV	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	42.03	3"	2.875	7.25	2.450	0.750	5.65	
444TSCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	43.75	3"	2.375	4.75	2.021	0.625	3.03	
444TCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	46.49	3"	3.375	8.50	2.880	0.875	6.93	
445TSCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	43.75	3"	2.375	4.75	2.021	0.625	3.03	
445TCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	47.75	3"	3.375	8.50	2.880	0.875	6.93	
447TSCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	46.27	3"	2.375	4.75	2.021	0.625	3.03	
447TCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	51.25	3"	3.375	8.50	2.880	0.875	6.93	
449TSCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	52.37	3"	2.375	4.75	2.021	0.625	3.03	
449TCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	56.40	3"	3.375	8.50	2.880	0.875	6.93	

Fig. A
364 - 449Fr.

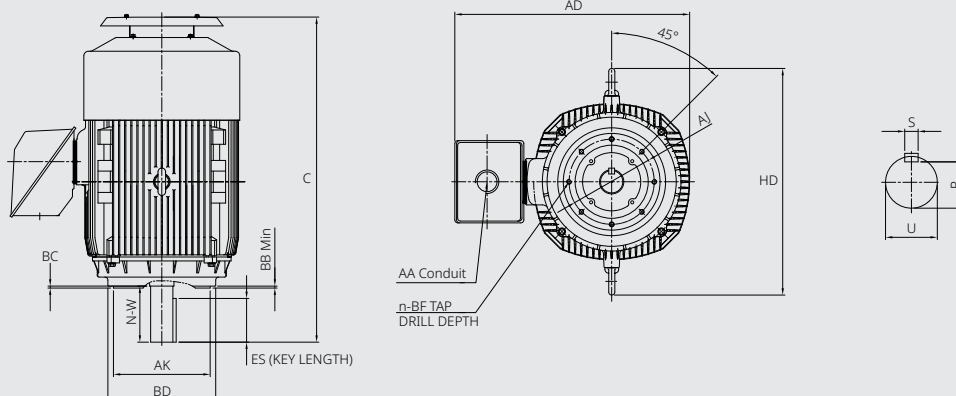

HES Model - Severe duty, Premium Efficiency Three phase, TEFC, Vertical, D-Flange, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

Vertical, D-Flange, Footless NEMA Dimensions

Frame Size	D-Flange						Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
143TDRDV	10.00	9.00	0.25	11.00	0.53	4	12.46	11.00	14.15	3/4"	0.875	2.25	0.771	0.188	1.41	A
145TDRDV	10.00	9.00	0.25	11.00	0.53	4	12.46	11.00	14.15	3/4"	0.875	2.25	0.771	0.188	1.41	
182TDRDV	10.00	9.00	0.25	11.00	0.53	4	13.42	12.46	16.77	3/4"	1.125	2.75	0.986	0.25	1.78	
184TDRDV	10.00	9.00	0.25	11.00	0.53	4	13.42	12.46	16.77	3/4"	1.125	2.75	0.986	0.25	1.78	
213TDRDV	10.00	9.00	0.25	11.00	0.53	4	15.13	14.13	19.49	1"	1.375	3.38	1.201	0.312	2.41	
215TDRDV	10.00	9.00	0.25	11.00	0.53	4	15.13	14.13	20.97	1"	1.375	3.38	1.201	0.312	2.41	
254TDRDV	12.50	11.00	0.25	13.78	0.81	4	18.51	17.01	25.35	1 1/4"	1.625	4.00	1.416	0.375	2.91	
256TDRDV	12.50	11.00	0.25	13.78	0.81	4	18.51	17.01	27.08	1 1/4"	1.625	4.00	1.416	0.375	2.91	
284TSRDV	12.50	11.00	0.25	13.78	0.81	4	19.84	18.50	27.16	1 1/2"	1.625	3.25	1.416	0.375	1.91	
284TDRDV	12.50	11.00	0.25	13.78	0.81	4	19.84	18.50	28.53	1 1/2"	1.875	4.62	1.591	0.5	3.28	
286TSRDV	12.50	11.00	0.25	13.78	0.81	4	19.84	18.50	28.66	1 1/2"	1.625	3.25	1.416	0.375	1.91	
286TDRDV	12.50	11.00	0.25	13.78	0.81	4	19.84	18.50	30.03	1 1/2"	1.875	4.62	1.591	0.5	3.28	
324TSRDV	16.00	14.00	0.25	17.72	0.81	4	24.14	21.10	31.54	2"	1.875	3.75	1.591	0.5	2.03	
324TDRDV	16.00	14.00	0.25	17.72	0.81	4	24.14	21.10	33.04	2"	2.125	5.25	1.845	0.5	3.91	
326TSRDV	16.00	14.00	0.25	17.72	0.81	4	24.14	21.10	31.54	2"	1.875	3.75	1.591	0.5	2.03	
326TDRDV	16.00	14.00	0.25	17.72	0.81	4	24.14	21.10	33.04	2"	2.125	5.25	1.845	0.5	3.91	

Fig. A
143 - 326Fr.

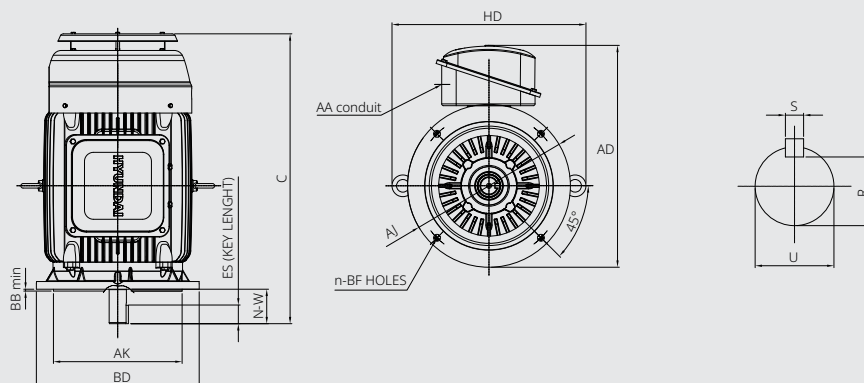

HHI Model - Severe duty, Premium Efficiency Three phase, TEFC, Vertical, D-Flange, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible

Vertical, D-Flange, Footless NEMA Dimensions

Frame Size	D-Flange						Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
364TSDRDV	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	34.50	3"	1.875	3.75	1.591	0.5	2.03	A
364TDRDV	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	36.62	3"	2.375	5.88	2.021	0.625	4.28	
365TSDRDV	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	34.50	3"	1.875	3.75	1.591	0.5	2.03	
365TDRDV	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	36.62	3"	2.375	5.88	2.021	0.625	4.28	
404TDRDV	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	42.02	3"	2.875	7.25	2.450	0.75	5.65	
405TSDRDV	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	39.02	3"	2.125	4.25	1.845	0.5	2.8	
405TDRDV	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	42.02	3"	2.875	7.25	2.450	0.75	5.65	
444TSDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	43.97	3"	2.375	4.75	2.021	0.625	3.03	
444TDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	47.72	3"	3.375	8.50	2.880	0.875	6.93	
445TSDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	43.97	3"	2.375	4.75	2.021	0.625	3.03	
445TDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	47.72	3"	3.375	8.50	2.880	0.875	6.93	
447TSDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	47.48	3"	2.375	4.75	2.021	0.625	3.03	
447TDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	51.23	3"	3.375	8.50	2.880	0.875	6.93	
449TSDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	52.60	3"	2.375	4.75	2.021	0.625	3.03	
449TDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	56.35	3"	3.375	8.50	2.880	0.875	6.93	

Fig. A
364 - 449Fr.

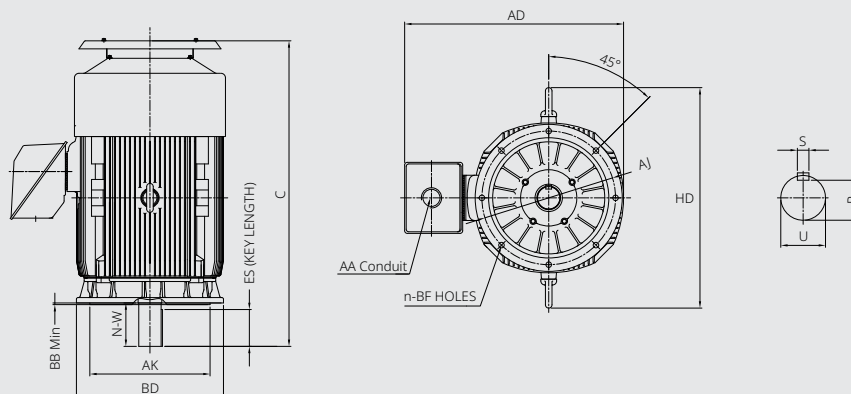

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, Foot mounted



Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Shaft & Keyway					Conduit Box	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				U	N-W	R	S	ES	AA	
143T	3.5	5.5	1.36	6.78	0.47	(5)	4	6.15	2.25	0.34	10.84	9.09	13.05	0.875	2.25	0.771	0.188	1.41	3/4"	A
145T	3.5	5.5	1.36	6.78	0.47	5	(4)	6.15	2.25	0.34	10.84	9.09	13.05	0.875	2.25	0.771	0.188	1.41	3/4"	
182T	4.5	7.5	1.64	8.65	0.6	(5.5)	4.5	6.69	2.75	0.41	12.79	10.73	15.75	1.125	2.75	0.986	0.25	1.78	3/4"	
184T	4.5	7.5	1.64	8.65	0.6	5.5	(4.5)	6.69	2.75	0.41	12.79	10.73	15.75	1.125	2.75	0.986	0.25	1.78	3/4"	B
213T	5.25	8.5	1.69	9.88	0.66	5.5	-	6.69	3.5	0.41	14.56	12.32	18.51	1.375	3.38	1.201	0.312	2.41	1"	
215T	5.25	8.5	1.72	9.91	0.68	7	-	8.19	3.5	0.41	14.56	12.32	19.93	1.375	3.38	1.201	0.312	2.41	1"	
254T	6.25	10	1.93	11.30	0.72	8.25	-	9.56	4.25	0.53	18.23	14.76	24.93	1.625	4.00	1.416	0.375	2.91	1 1/4"	C
256T	6.25	10	1.93	11.30	0.72	10	-	11.3	4.25	0.53	18.23	14.76	24.93	1.625	4.00	1.416	0.375	2.91	1 1/4"	
284TS	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	0.53	19.54	16.29	24.65	1.625	3.25	1.416	0.375	1.91	1 1/2"	
284T	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	0.53	19.54	16.29	26.02	1.875	4.62	1.591	0.5	3.28	1 1/2"	
286TS	7	11	2.20	12.60	0.78	11	-	12.68	4.75	0.53	22.54	16.29	26.15	1.625	3.25	1.416	0.375	1.91	1 1/2"	
286T	7	11	2.20	12.60	0.78	11	-	12.68	4.75	0.53	19.54	16.29	27.52	1.875	4.62	1.591	0.5	3.28	1 1/2"	
324TS	8	12.5	2.36	14.33	1.11	(12)	10.5	13.78	5.25	0.66	24.23	18.60	29.96	1.875	3.75	1.591	0.5	2.03	2"	
324T	8	12.5	2.36	14.33	1.11	(12)	10.5	13.78	5.25	0.66	24.23	18.60	31.46	2.125	5.25	1.845	0.5	3.91	2"	
326TS	8	12.5	2.36	14.33	1.11	12	(10.5)	13.78	5.25	0.66	24.23	18.60	29.96	1.875	3.75	1.591	0.5	2.03	2"	
326T	8	12.5	2.36	14.33	1.11	12	(10.5)	13.78	5.25	0.66	24.23	18.60	31.46	2.125	5.25	1.845	0.5	3.91	2"	
364TS	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.25	21.30	33.06	1.875	3.75	1.591	0.5	2.03	3"	D
364T	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.25	21.30	35.20	2.375	5.88	2.021	0.625	4.28	3"	
365TS	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.25	21.30	33.06	1.875	3.75	1.591	0.5	2.03	3"	
365T	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.25	21.30	35.20	2.375	5.88	2.021	0.625	4.28	3"	
404T	10	16	3.03	18.43	1.18	(13.75)	12.25	16.46	6.62	0.81	30.36	24.34	41.01	2.875	7.25	2.45	0.75	5.65	3"	
405TS	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.36	24.34	38.00	2.125	4.25	1.845	0.5	2.8	3"	
405T	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.36	24.34	41.01	2.875	7.25	2.45	0.75	5.65	3"	
444TS	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.46	27.52	47.15	2.375	4.75	2.021	0.625	3.03	3"	
444T	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.46	27.52	46.45	3.375	8.5	2.88	0.875	6.93	3"	
445TS	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.46	27.52	47.15	2.375	4.75	2.021	0.625	3.03	3"	
445T	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.46	27.52	46.78	3.375	8.5	2.88	0.875	6.93	3"	
447TS	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	34.98	27.52	50.65	2.375	4.75	2.021	0.625	3.03	3"	
447T	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	34.98	27.52	50.29	3.375	8.5	2.88	0.875	6.93	3"	
449TS	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	34.98	27.52	55.77	2.375	4.75	2.021	0.625	3.03	3"	
449T	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	34.98	27.52	53.83	3.375	8.5	2.88	0.875	6.93	3"	

Fig. A
143 - 145Fr.

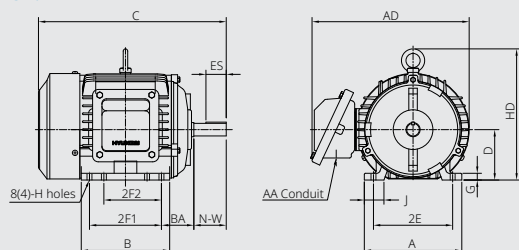


Fig. B
182 - 215Fr.

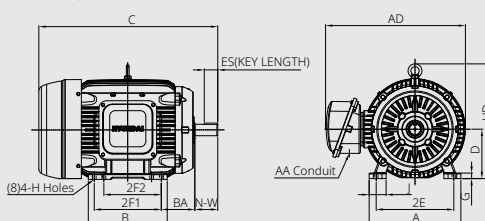


Fig. C
254 - 326Fr.


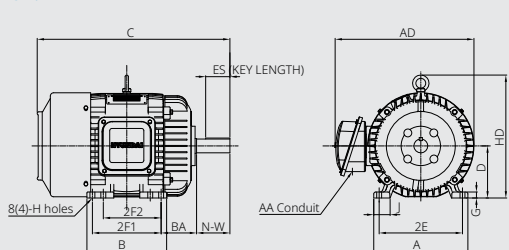


Fig. D
364 - 449Fr.



IEEE XL Model - IEEE841, Premium Efficiency, Large motor Three phase, TEFC, Foot mounted

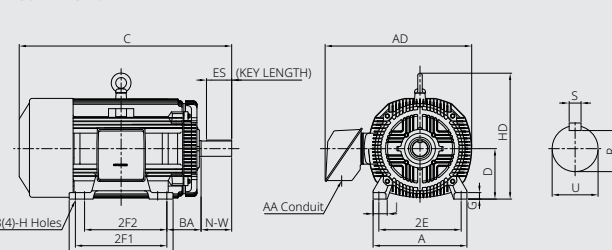

Features

- Cast-iron terminal box
 - Fully rotatable at 90 increments
- Fabricated steel terminal box (Fr. 5812)
- Labyrinth seal (at 3600 RPM Motor), Protech seal (at 1800, 1200 RPM Motor)

Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Shaft & Keyway					Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				U	N-W	R	S	ES		
L449TS	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	55.89	2.375	4.75	2.021	0.625	3.03	4"	A
L449T-4P	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	55.18	3.375	8.5	2.88	0.875	6.93	4"	
L449T-6P	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	59.98	3.375	8.5	2.88	0.875	6.93	4"	
5008S	12.5	20	4.88	25.04	1.26	(28)	25	33.07	8.5	0.94	42.01	36.3	62.03	2.625	5.75	2.275	0.625	4	4"	
5008	12.5	20	4.88	25.04	1.26	(28)	25	33.07	8.5	0.94	42.01	36.3	67.96	3.875	11.625	3.309	1	10	4"	
5009S	12.5	20	4.88	25.04	1.26	28	(25)	33.07	8.5	0.94	42.01	36.3	62.03	2.625	5.75	2.275	0.625	4	4"	
5009	12.5	20	4.88	25.04	1.26	28	(25)	33.07	8.5	0.94	42.01	36.3	67.96	3.875	11.625	3.309	1	10	4"	
5010S	12.5	20	4.88	25.04	1.26	(36)	32	41	8.5	0.94	42.01	36.3	67.54	2.625	5.75	2.275	0.625	4	4"	
5010	12.5	20	4.88	25.04	1.26	(36)	32	41	8.5	0.94	42.01	36.3	70.84	3.875	11.625	3.309	1	10	4"	
5011S	12.5	20	4.88	25.04	1.26	36	(32)	41	8.5	0.94	42.01	36.3	67.54	2.625	5.75	2.275	0.625	4	4"	
5011	12.5	20	4.88	25.04	1.26	36	(32)	41	8.5	0.94	42.01	36.3	70.84	3.875	11.625	3.309	1	10	4"	B
5812S-2P	14.5	23	5.85	29.53	1.97	45	40	51.77	10	1.18	51.87	40.4	82.04	2.875	6.75	2.45	0.75	6.55	4"	
5812-4P	14.5	23	5.85	29.53	1.97	45	40	51.77	10	1.18	51.87	40.4	83.6	4.375	8.3	3.817	1	8.05	4"	
5812-6P	14.5	23	5.85	29.53	1.97	45	40	51.77	10	1.18	51.87	40.4	83.6	4.375	8.3	3.817	1	8.05	4"	

Fig. A
L449 - 5011Fr.


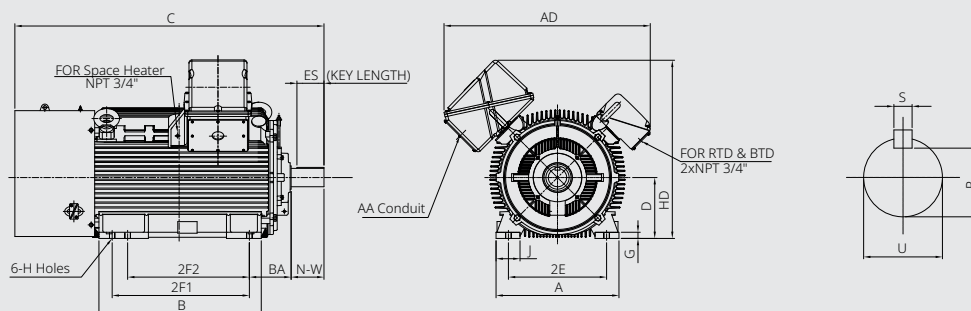


Fig. B
5812Fr.



IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, C-Face, Foot mounted

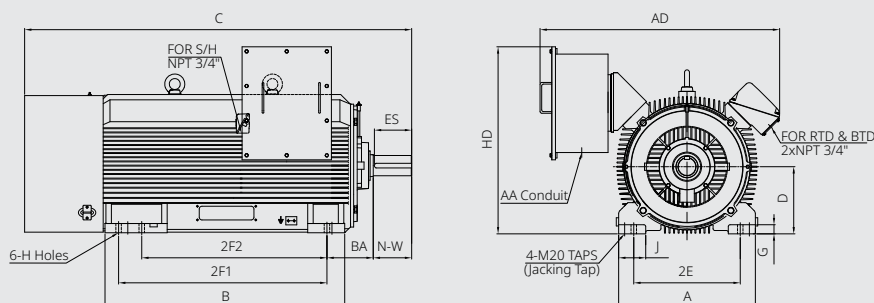

Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

C-Face, Foot Mounted NEMA Dimensions (Fr. 143 - 326)

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H					
143TC	3.5	5.5	1.36	6.78	0.45	(5)	4	6.15	2.25	0.34	10.84	15.1	13.05	3/4"	A
145TC	3.5	5.5	1.36	6.78	0.47	5	(4)	6.15	2.25	0.34	10.84	15.1	13.05	3/4"	
182TC	4.5	7.5	1.64	8.65	0.6	(5.5)	4.5	6.69	2.75	0.41	12.79	10.73	15.75	3/4"	B
184TC	4.5	7.5	1.64	8.65	0.6	5.5	(4.5)	6.69	2.75	0.41	12.79	10.73	15.75	3/4"	
213TC	5.25	8.5	1.72	9.91	0.68	5.5	-	6.69	3.5	0.41	14.56	12.32	18.51	1"	B
215TC	5.25	8.5	1.72	9.91	0.68	7	-	8.19	3.5	0.41	14.56	12.32	19.93	1"	
254TC	6.25	10	1.93	11.30	0.72	8.25	-	9.56	4.25	0.53	18.23	25.51	23.13	1 1/4"	C
256TC	6.25	10	1.93	11.30	0.72	10	-	11.3	4.25	0.53	18.23	25.51	24.86	1 1/4"	
284TSC	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	0.53	19.535	28.47	24.65	1 1/2"	C
284TC	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	0.53	19.535	28.47	26.02	1 1/2"	
286TSC	7	11	2.20	12.60	0.78	11	-	12.68	4.75	0.53	19.535	28.47	26.15	1 1/2"	
286TC	7	11	2.20	12.60	0.78	11	-	12.68	4.75	0.53	19.535	28.47	27.52	1 1/2"	
324TSC	8	12.5	2.44	14.33	1.11	(12)	10.5	13.78	5.25	0.66	23.23	32.03	29.96	2"	
324TC	8	12.5	2.36	14.33	1.11	(12)	10.5	13.78	5.25	0.66	23.23	32.03	31.46	2"	
326TSC	8	12.5	2.44	14.33	1.11	12	(10.5)	13.78	5.25	0.66	23.23	32.03	29.96	2"	
326TC	8	12.5	2.36	14.33	1.11	12	(10.5)	13.78	5.25	0.66	23.23	32.03	31.46	2"	

Frame Size	C-Face								Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	U	N-W	R	S	ES(Length)	
143TC	5.875	4.50	0.16	0.12	6.57	3/8-16	4	0.56	0.875	2.25	0.771	0.188	1.41	A
145TC	5.875	4.50	0.16	0.12	6.57	3/8-16	4	0.56	0.875	2.25	0.771	0.188	1.41	
182TC	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	1.125	2.75	0.986	0.25	1.78	B
184TC	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	1.125	2.75	0.986	0.25	1.78	
213TC	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	1.375	3.38	1.201	0.312	2.41	B
215TC	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	1.375	3.38	1.201	0.312	2.41	
254TC	7.25	8.50	0.25	0.25	9.68	1/2-13	4	0.75	1.625	4.00	1.416	0.375	2.91	C
256TC	7.25	8.50	0.25	0.25	9.68	1/2-13	4	0.75	1.625	4.00	1.416	0.375	2.91	
284TSC	9.0	10.50	0.25	0.25	10.9	1/2-13	4	0.75	1.625	3.25	1.416	0.375	1.91	
284TC	9.0	10.50	0.25	0.25	10.9	1/2-13	4	0.75	1.875	4.62	1.591	0.5	3.28	
286TSC	9.0	10.50	0.25	0.25	10.9	1/2-13	4	0.75	1.625	3.25	1.416	0.375	1.91	
286TC	9.0	10.50	0.25	0.25	10.9	1/2-13	4	0.75	1.875	4.62	1.591	0.5	3.28	
324TSC	11.0	12.50	0.25	0.25	13.27	5/8-11	4	0.94	1.875	3.75	1.591	0.5	2.03	
324TC	11.0	12.50	0.25	0.25	13.27	5/8-11	4	0.94	2.125	5.25	1.845	0.5	3.91	
326TSC	11.0	12.50	0.25	0.25	13.27	5/8-11	4	0.94	1.875	3.75	1.591	0.5	2.03	C
326TC	11.0	12.50	0.25	0.25	13.27	5/8-11	4	0.94	2.125	5.25	1.845	0.5	3.91	

Fig. A
143 - 145Fr.

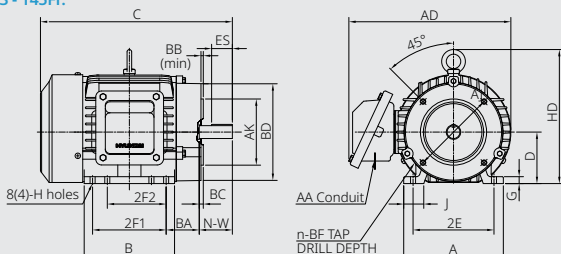


Fig. B
182 - 215Fr.


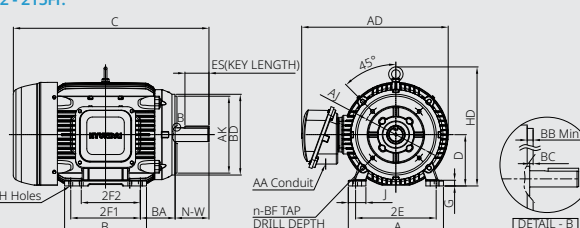


Fig. C
254 - 326Fr.



IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, C-Face, Foot mounted

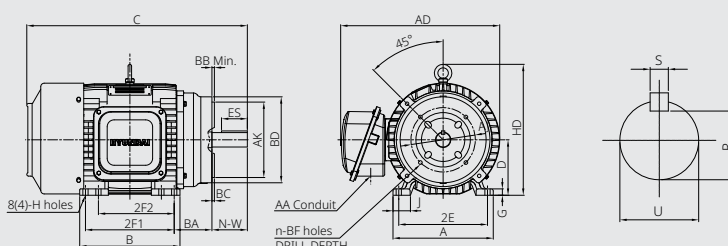

Features


- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

C-Face, Foot Mounted NEMA Dimensions (Fr. 364 - 449)

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H					
364TSC	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.01	36.25	33.06	3"	A
364TC	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.01	36.25	35.20	3"	
365TSC	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.01	36.25	33.06	3"	
365TC	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.01	36.25	35.20	3"	
404TC	10	16	3.03	18.43	1.18	(13.75)	12.25	16.46	6.62	0.81	30.13	40.48	41.01	3"	
405TSC	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.13	40.48	38.00	3"	
405TC	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	30.13	40.48	41.01	3"	
444TSC	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.48	45.63	47.15	3"	
444TC	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.48	45.63	46.45	3"	
445TSC	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.48	45.63	47.15	3"	
445TC	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.48	45.63	46.78	3"	
447TSC	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	35.00	45.63	50.65	3"	
447TC	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	35.00	45.63	50.29	3"	
449TSC	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	35.00	45.63	55.77	3"	
449TC	11	18	3.07	20.51	1.42	25	(20)	27.72	7.5	0.81	35.00	45.63	53.83	3"	

Frame Size	C-Face								Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	U	N-W	R	S	ES(Length)	
364TSC	11	12.5	0.25	0.25	13.54	5/8-11	8	0.94	1.875	3.75	1.591	0.5	2.03	A
364TC	11	12.5	0.25	0.25	13.54	5/8-11	8	0.94	2.375	5.88	2.021	0.625	4.28	
365TSC	11	12.5	0.25	0.25	13.54	5/8-11	8	0.94	1.875	3.75	1.591	0.5	2.03	
365TC	11	12.5	0.25	0.25	13.54	5/8-11	8	0.94	2.375	5.88	2.021	0.625	4.28	
404TC	11	12.5	0.25	0.25	13.94	5/8-11	8	0.94	2.875	7.25	2.45	0.75	5.65	
405TSC	11	12.5	0.25	0.25	13.94	5/8-11	8	0.94	2.125	4.25	1.845	0.5	2.8	
405TC	11	12.5	0.25	0.25	13.94	5/8-11	8	0.94	2.875	7.25	2.45	0.75	5.65	
444TSC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	
444TC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	
445TSC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	
445TC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	
447TSC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	
447TC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	
449TSC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	
449TC	14	16	0.25	0.25	17.48	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	

Fig. A
364 - 449Fr.

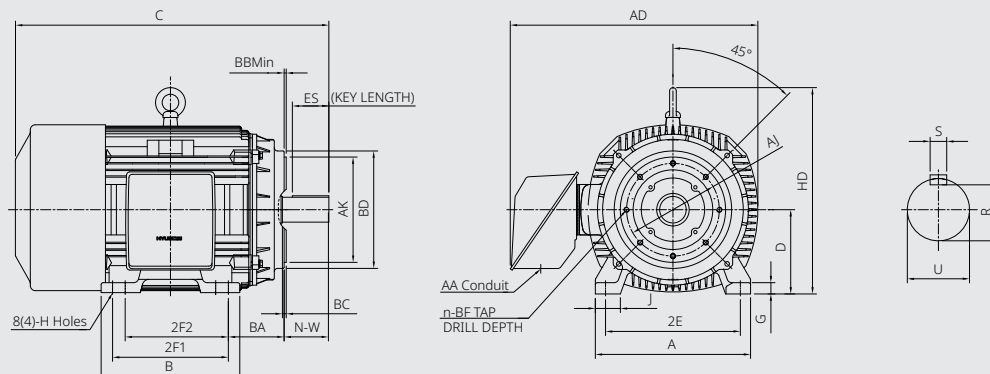

IEEE XL Model - IEEE841, Premium Efficiency, Large motor Three phase, TEFC, C-Face Foot mounted



Features


- Cast-iron terminal box
 - Fully rotatable at 90 increments
- Fabricated steel terminal box (Fr. 5812)
- Labyrinth seal (at 3600 RPM Motor), Protech seal (at 1800, 1200 RPM Motor)

C-Face, Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				AA	
L449TSC	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	55.89	4"	A
L449TC-4P	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	55.18	4"	
L449TC-6P	11	18	3.58	22.05	1.18	25	(20)	30.7	7.5	0.81	40.8	34.37	59.98	4"	
5008SC	12.5	20	4.88	25.04	1.26	(28)	25	33.07	8.5	0.94	42.01	36.3	62.03	4"	
5008C	12.5	20	4.88	25.04	1.26	(28)	25	33.07	8.5	0.94	42.01	36.3	67.96	4"	
5009SC	12.5	20	4.88	25.04	1.26	28	(25)	33.07	8.5	0.94	42.01	36.3	62.03	4"	
5009C	12.5	20	4.88	25.04	1.26	28	(25)	33.07	8.5	0.94	42.01	36.3	67.96	4"	
5010SC	12.5	20	4.88	25.04	1.26	(36)	32	41	8.5	0.94	42.01	36.3	67.54	4"	
5010C	12.5	20	4.88	25.04	1.26	(36)	32	41	8.5	0.94	42.01	36.3	70.84	4"	
5011SC	12.5	20	4.88	25.04	1.26	36	(32)	41	8.5	0.94	42.01	36.3	67.54	4"	
5011C	12.5	20	4.88	25.04	1.26	36	(32)	41	8.5	0.94	42.01	36.3	70.84	4"	

Frame Size	C-Face								Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	U	N-W	R	S	ES(Length)	
L449TSC	14	16	0.25	0.25	18	5/8-11	8	0.94	2.375	4.75	2.021	0.625	3.03	A
L449TC-4P	14	16	0.25	0.25	18	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	
L449TC-6P	14	16	0.25	0.25	18	5/8-11	8	0.94	3.375	8.5	2.88	0.875	6.93	
5008SC	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	2.625	5.75	2.275	0.625	4	
5008C	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	3.875	11.625	3.309	1	10	
5009SC	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	2.625	5.75	2.275	0.625	4	
5009C	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	3.875	11.625	3.309	1	10	
5010SC	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	2.625	5.75	2.275	0.625	4	
5010C	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	3.875	11.625	3.309	1	10	
5011SC	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	2.625	5.75	2.275	0.625	4	
5011C	14.5	16.5	0.25	0.25	19	5/8-11	8	0.94	3.875	11.625	3.309	1	10	

Fig. A
L449 - 5011Fr.

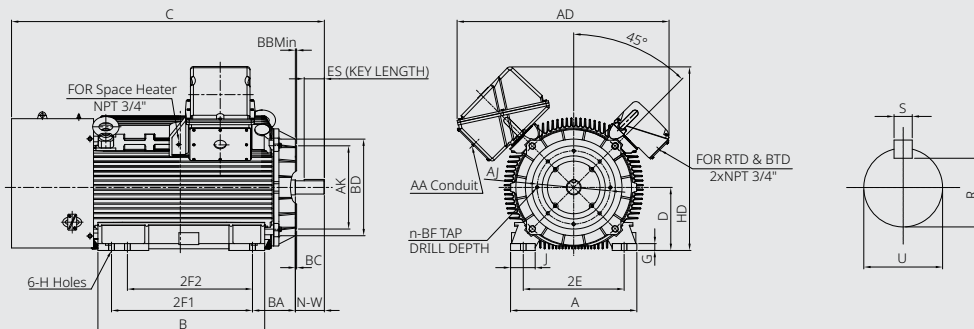

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, D-Flange, Foot mounted



Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

D-Flange, Foot Mounted NEMA Dimensions (Fr. 182 - 326)

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				AA	
182TD	4.5	7.5	1.64	8.65	0.6	(5.5)	4.5	6.69	2.75	0.41	13.42	11.74	15.75	3/4"	A
184TD	4.5	7.5	1.64	8.65	0.6	5.5	(4.5)	6.69	2.75	0.41	13.42	11.74	15.75	3/4"	
213TD	5.25	8.5	1.72	9.91	0.68	5.5	-	6.69	3.5	0.41	14.7	12.57	18.51	1"	
215TD	5.25	8.5	1.72	9.91	0.68	7	-	8.19	3.5	0.41	14.7	12.57	19.99	1"	
254TD	6.25	10	1.93	11.30	0.72	8.25	-	9.56	4.25	0.53	18.85	14.76	23.2	1 1/4"	B
256TD	6.25	10	1.93	11.30	0.72	10	-	11.30	4.25	0.53	18.85	14.76	24.93	1 1/4"	
284TSD	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	0.53	19.44	16.29	24.65	1 1/2"	
284TD	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	0.53	19.44	16.29	26.02	1 1/2"	
286TSD	7	11	2.20	12.60	0.78	11	-	12.68	4.75	0.53	19.44	16.29	26.22	1 1/2"	
286TD	7	11	2.20	12.60	0.78	11	-	12.68	4.75	0.53	19.44	16.29	26.52	1 1/2"	
324TSD	8	12.5	2.36	14.33	1.11	(12)	10.5	13.78	5.25	0.66	24.31	18.60	29.96	2"	
324TD	8	12.5	2.36	14.33	1.11	(12)	10.5	13.78	5.25	0.66	24.31	18.60	31.46	2"	
326TSD	8	12.5	2.36	14.33	1.11	12	(10.5)	13.78	5.25	0.66	24.31	18.60	29.96	2"	
326TD	8	12.5	2.36	14.33	1.11	12	(10.5)	13.78	5.25	0.66	24.31	18.60	31.46	2"	

Frame Size	D-Flange						Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	U	N-W	R	S	ES(Length)	
182TD	10.00	9.00	0.25	11	0.53	4	1.125	2.75	0.986	0.25	1.78	A
184TD	10.00	9.00	0.25	11	0.53	4	1.125	2.75	0.986	0.25	1.78	
213TD	10.00	9.00	0.25	11	0.53	4	1.375	3.38	1.201	0.312	2.41	
215TD	10.00	9.00	0.25	11	0.53	4	1.375	3.38	1.201	0.312	2.41	
254TD	12.50	11.00	0.25	14	0.81	4	1.625	4.00	1.416	0.375	2.91	B
256TD	12.50	11.00	0.25	14	0.81	4	1.625	4.00	1.416	0.375	2.91	
284TSD	12.50	11.00	0.25	14	0.81	4	1.625	3.25	1.416	0.375	1.91	
284TD	12.50	11.00	0.25	14	0.81	4	1.875	4.62	1.591	0.5	3.28	
286TSD	12.50	11.00	0.25	14	0.81	4	1.625	3.25	1.416	0.375	1.91	
286TD	12.50	11.00	0.25	14	0.81	4	1.875	4.62	1.591	0.5	3.28	
324TSD	16.00	14.00	0.25	18	0.81	4	1.875	3.75	1.591	0.5	2.03	
324TD	16.00	14.00	0.25	18	0.81	4	2.125	5.25	1.845	0.5	3.91	
326TSD	16.00	14.00	0.25	18	0.81	4	1.875	3.75	1.591	0.5	2.03	
326TD	16.00	14.00	0.25	18	0.81	4	2.125	5.25	1.845	0.5	3.91	

Fig. A
182 - 215Fr.


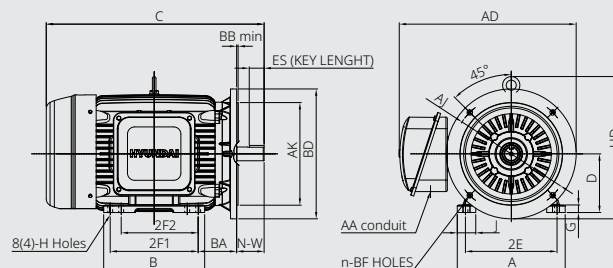


Fig. B
254 - 326Fr.



IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, D-Flange, Foot mounted

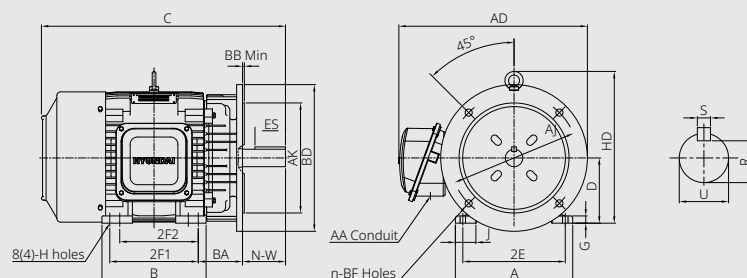

Features


- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

D-Flange, Foot Mounted NEMA Dimensions (Fr. 364 - 449)

Frame Size	Mounting & Overall										AD (Approx.)	HD (Approx.)	C (Approx.)	Conduit Box	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	H				AA	
364TSD	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.13	21.3	33.06	3"	A
364TD	9	14	2.72	16.14	0.98	(12.25)	11.25	14.92	5.88	0.66	26.13	21.3	35.20	3"	
365TSD	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.13	21.3	33.06	3"	
365TD	9	14	2.72	16.14	0.98	12.25	(11.25)	14.92	5.88	0.66	26.13	21.3	35.20	3"	
404TD	10	16	3.03	18.43	1.18	(13.75)	12.25	16.46	6.62	0.81	31.11	24.34	41.01	3"	
405TSD	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	31.11	24.34	38.00	3"	
405TD	10	16	3.03	18.43	1.18	13.75	(12.25)	16.46	6.62	0.81	31.11	24.34	41.01	3"	
444TSD	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.48	27.52	47.15	3"	
444TD	11	18	3.07	20.51	1.42	(16.5)	14.5	19.21	7.5	0.81	32.48	27.52	46.45	3"	
445TSD	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.48	27.52	47.15	3"	
445TD	11	18	3.07	20.51	1.42	16.5	(14.5)	19.21	7.5	0.81	32.48	27.52	46.78	3"	
447TSD	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	32.48	27.52	50.65	3"	
447TD	11	18	3.07	20.51	1.42	20	(17.99)	22.72	7.5	0.81	32.48	27.52	50.29	3"	
449TSD	11	18	3.07	20.51	1.42	25	(20)	22.72	7.5	0.81	32.48	27.52	55.77	3"	
449TD	11	18	3.07	20.51	1.42	25	(20)	22.72	7.5	0.81	32.48	27.52	53.83	3"	

Frame Size	D-Flange						Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	U	N-W	R	S	ES(Length)	
364TSD	16	14	0.25	17.99	0.81	8	1.875	3.75	1.591	0.5	2.03	A
364TD	16	14	0.25	17.99	0.81	8	2.375	5.88	2.021	0.625	4.28	
365TSD	16	14	0.25	17.99	0.81	8	1.875	3.75	1.591	0.5	2.03	
365TD	16	14	0.25	17.99	0.81	8	2.375	5.88	2.021	0.625	4.28	
404TD	20	18	0.25	21.65	0.81	8	2.875	7.25	2.45	0.75	5.65	
405TSD	20	18	0.25	21.65	0.81	8	2.125	4.25	1.845	0.5	2.8	
405TD	20	18	0.25	21.65	0.81	8	2.875	7.25	2.45	0.75	5.65	
444TSD	20	18	0.25	22	0.81	8	2.375	4.75	2.021	0.625	3.03	
444TD	20	18	0.25	22	0.81	8	3.375	8.5	2.88	0.875	6.93	
445TSD	20	18	0.25	22	0.81	8	2.375	4.75	2.021	0.625	3.03	
445TD	20	18	0.25	22	0.81	8	3.375	8.5	2.88	0.875	6.93	
447TSD	20	18	0.25	22	0.81	8	2.375	4.75	2.021	0.625	3.03	
447TD	20	18	0.25	22	0.81	8	3.375	8.5	2.88	0.875	6.93	
449TSD	20	18	0.25	22	0.81	8	2.375	4.75	2.021	0.625	3.03	
449TD	20	18	0.25	22	0.81	8	3.375	8.5	2.88	0.875	6.93	

Fig. A
364 - 449Fr.

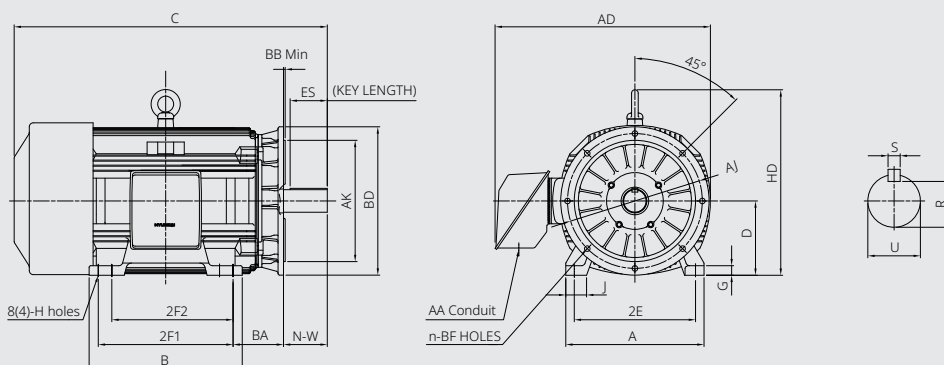

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, C-Face, Footless



Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

C-Face, Footless NEMA Dimensions (Fr. 143 - 326)

Frame Size	C-Face								Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
143TCRD	5.875	4.50	0.16	0.12	6.57	3/8-16	4	0.56	10.69	8.96	13.05	3/4"	0.875	2.25	0.771	0.188	1.41	A
145TCRD	5.875	4.50	0.16	0.12	6.57	3/8-16	4	0.56	10.69	8.96	13.05	3/4"	0.875	2.25	0.771	0.188	1.41	
182TCRD	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	12.79	11.15	15.75	3/4"	1.125	2.75	0.986	0.250	1.78	B
184TCRD	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	12.79	11.15	15.75	3/4"	1.125	2.75	0.986	0.250	1.78	
213TCRD	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	14.56	12.09	18.51	1"	1.375	3.38	1.201	0.312	2.41	C
215TCRD	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	14.56	12.09	19.93	1"	1.375	3.38	1.201	0.312	2.41	
254TCRD	7.25	8.50	0.25	0.25	9.68	1/2-13	4	0.75	18.23	14.77	23.20	1 1/4"	1.625	4.00	1.416	0.375	2.91	C
256TCRD	7.25	8.50	0.25	0.25	9.68	1/2-13	4	0.75	18.23	14.77	24.93	1 1/4"	1.625	4.00	1.416	0.375	2.91	
284TSCRD	9.00	10.50	0.25	0.25	10.90	1/2-13	4	0.75	19.54	16.20	24.91	1 1/2"	1.625	3.25	1.416	0.375	1.91	C
284TCRD	9.00	10.50	0.25	0.25	10.90	1/2-13	4	0.75	19.54	16.20	26.28	1 1/2"	1.875	4.62	1.591	0.500	3.28	
286TSCRD	9.00	10.50	0.25	0.25	10.90	1/2-13	4	0.75	19.54	16.20	26.41	1 1/2"	1.625	3.25	1.416	0.375	1.91	C
286TCRD	9.00	10.50	0.25	0.25	10.90	1/2-13	4	0.75	19.54	16.20	27.78	1 1/2"	1.875	4.62	1.591	0.500	3.28	
324TSCRD	11.00	12.50	0.25	0.25	13.27	5/8-11	4	0.94	23.23	18.25	31.40	2"	1.875	3.75	1.591	0.500	2.03	C
324TCRD	11.00	12.50	0.25	0.25	13.27	5/8-11	4	0.94	23.23	18.25	31.40	2"	2.125	5.25	1.845	0.500	3.91	
326TSCRD	11.00	12.50	0.25	0.25	13.27	5/8-11	4	0.94	23.23	18.25	31.40	2"	1.875	3.75	1.591	0.500	2.03	C
326TCRD	11.00	12.50	0.25	0.25	13.27	5/8-11	4	0.94	23.23	18.25	31.40	2"	2.125	5.25	1.845	0.500	3.91	

Fig. A
143 - 145Fr.

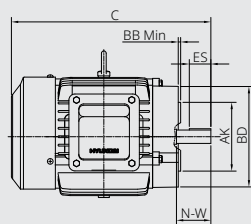


Fig. B
182 - 215Fr.


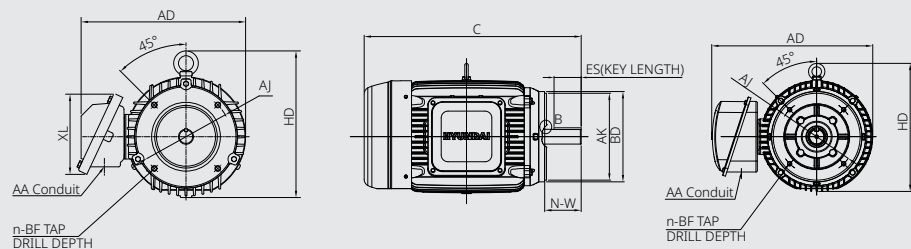


Fig. C
254 - 326Fr.



IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, C-Face, Footless

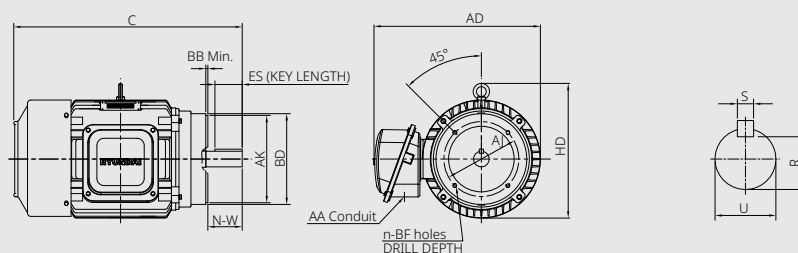


Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

C-Face, Footless NEMA Dimensions (Fr. 364 - 449)

Frame Size	C-Face								Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
364TSCRD	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	33.06	3"	1.875	3.75	1.591	0.500	2.03	A
364TCRD	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	35.20	3"	2.375	5.88	2.021	0.625	4.28	
365TSCRD	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	33.06	3"	1.875	3.75	1.591	0.500	2.03	
365TCRD	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	35.20	3"	2.375	5.88	2.021	0.625	4.28	
404TCRD	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	41.01	3"	2.875	7.25	2.450	0.750	5.65	
405TSCRD	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	38.00	3"	2.125	4.25	1.845	0.500	2.80	
405TCRD	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	41.01	3"	2.875	7.25	2.450	0.750	5.65	
444TSCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	47.15	3"	2.375	4.75	2.021	0.625	3.03	
444TCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	46.45	3"	3.375	8.50	2.880	0.875	6.93	
445TSCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	47.15	3"	2.375	4.75	2.021	0.625	3.03	
445TCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	46.78	3"	3.375	8.50	2.880	0.875	6.93	
447TSCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	35.00	32.99	50.65	3"	2.375	4.75	2.021	0.625	3.03	
447TCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	35.00	32.99	50.29	3"	3.375	8.50	2.880	0.875	6.93	
449TSCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	35.00	32.99	55.77	3"	2.375	4.75	2.021	0.625	3.03	
449TCRD	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	35.00	32.99	53.83	3"	3.375	8.50	2.880	0.875	6.93	

Fig. A
364 - 449Fr.

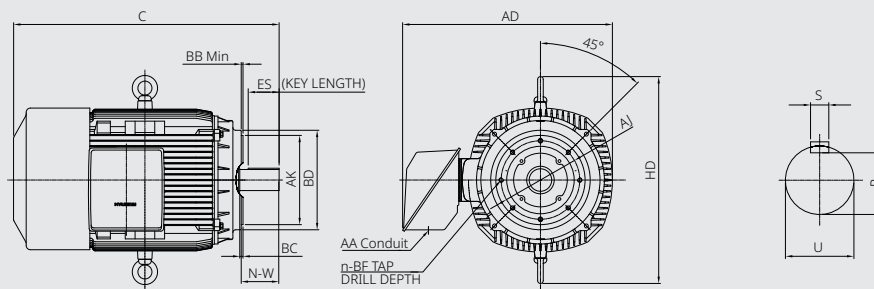

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, D-Flange, Footless



Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

D-Flange, Footless NEMA Dimensions (Fr. 182 - 326)

Frame Size	D-Flange						Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
182TDRD	10.00	9.00	0.25	11.00	0.53	4	13.42	11.74	15.75	3/4"	1.125	2.75	0.986	0.25	1.78	A
184TDRD	10.00	9.00	0.25	11.00	0.53	4	13.42	11.74	15.75	3/4"	1.125	2.75	0.986	0.25	1.78	
213TDRD	10.00	9.00	0.25	11.00	0.53	4	14.70	12.57	18.51	1"	1.375	3.38	1.201	0.312	2.41	
215TDRD	10.00	9.00	0.25	11.00	0.53	4	14.70	12.57	19.99	1"	1.375	3.38	1.201	0.312	2.41	
254TDRD	12.50	11.00	0.25	14.00	0.81	4	18.85	15.39	23.20	1 1/4"	1.625	4.00	1.416	0.375	2.91	B
256TDRD	12.50	11.00	0.25	14.00	0.81	4	18.85	15.39	24.93	1 1/4"	1.625	4.00	1.416	0.375	2.91	
284TSDRD	12.50	11.00	0.25	14.00	0.81	4	19.44	16.11	24.91	1 1/2"	1.625	3.25	1.416	0.375	1.91	
284TDRD	12.50	11.00	0.25	14.00	0.81	4	19.44	16.11	26.28	1 1/2"	1.875	4.62	1.591	0.5	3.28	
286TSDRD	12.50	11.00	0.25	14.00	0.81	4	19.44	16.11	26.34	1 1/2"	1.625	3.25	1.416	0.375	1.91	
286TDRD	12.50	11.00	0.25	14.00	0.81	4	19.44	16.11	27.78	1 1/2"	1.875	4.62	1.591	0.5	3.28	
324TSDRD	16.00	14.00	0.25	18.00	0.81	4	25.31	19.33	29.90	2"	1.875	3.75	1.591	0.5	2.03	
324TDRD	16.00	14.00	0.25	18.00	0.81	4	25.31	19.33	31.40	2"	2.125	5.25	1.845	0.5	3.91	
326TSDRD	16.00	14.00	0.25	18.00	0.81	4	25.31	19.33	29.90	2"	1.875	3.75	1.591	0.5	2.03	B
326TDRD	16.00	14.00	0.25	18.00	0.81	4	25.31	19.33	31.40	2"	2.125	5.25	1.845	0.5	3.91	

Fig. A
182 - 215Fr.


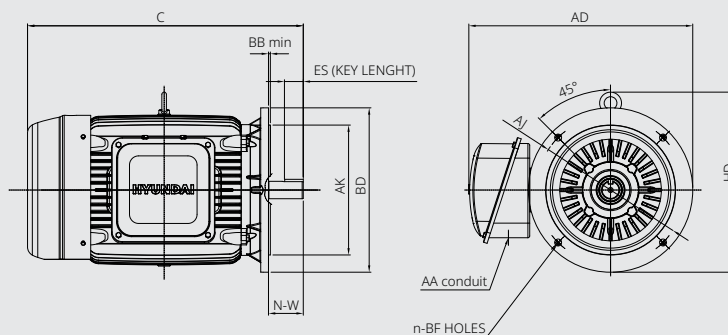


Fig. B
254 - 326Fr.



IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, D-Flange, Footless

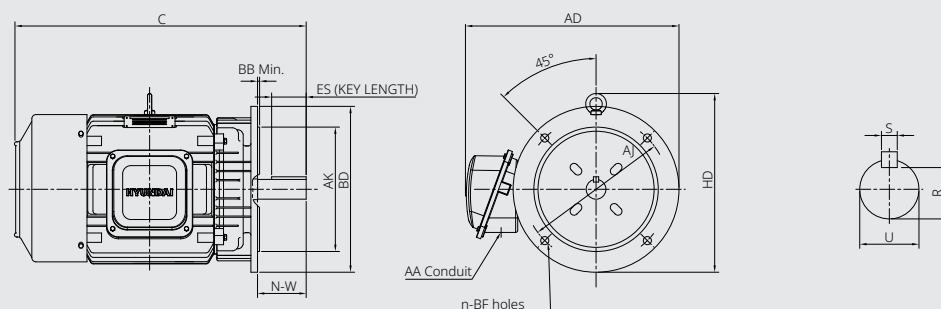


Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

D-Flange, Footless NEMA Dimensions (Fr. 364 - 449)

Frame Size	D-Flange						Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
364TSDRD	16.00	14.00	0.25	17.99	0.81	8	26.13	24.89	33.06	3"	1.875	3.75	1.591	0.5	2.03	A
364TDRD	16.00	14.00	0.25	17.99	0.81	8	26.13	24.89	35.20	3"	2.375	5.88	2.021	0.625	4.28	
365TSDRD	16.00	14.00	0.25	17.99	0.81	8	26.13	24.89	33.06	3"	1.875	3.75	1.591	0.5	2.03	
365TDRD	16.00	14.00	0.25	17.99	0.81	8	26.13	24.89	35.20	3"	2.375	5.88	2.021	0.625	4.28	
404TDRD	20.00	18.00	0.25	21.65	0.81	8	31.11	29.30	41.01	3"	2.875	7.25	2.450	0.75	5.65	
405TSDRD	20.00	18.00	0.25	21.65	0.81	8	31.11	29.30	38.00	3"	2.125	4.25	1.845	0.5	2.8	
405TDRD	20.00	18.00	0.25	21.65	0.81	8	31.11	29.30	41.01	3"	2.875	7.25	2.450	0.75	5.65	
444TSDRD	20.00	18.00	0.25	22.00	0.81	8	32.26	32.99	47.15	3"	2.375	4.75	2.021	0.625	3.03	
444TDRD	20.00	18.00	0.25	22.00	0.81	8	32.26	32.99	46.45	3"	3.375	8.50	2.880	0.875	6.93	
445TSDRD	20.00	18.00	0.25	22.00	0.81	8	32.26	32.99	47.15	3"	2.375	4.75	2.021	0.625	3.03	
445TDRD	20.00	18.00	0.25	22.00	0.81	8	32.26	32.99	46.78	3"	3.375	8.50	2.880	0.875	6.93	
447TSDRD	20.00	18.00	0.25	22.00	0.81	8	34.78	32.99	50.65	3"	2.375	4.75	2.021	0.625	3.03	
447TDRD	20.00	18.00	0.25	22.00	0.81	8	34.78	32.99	50.29	3"	3.375	8.50	2.880	0.875	6.93	
449TSDRD	20.00	18.00	0.25	22.00	0.81	8	34.78	32.99	55.77	3"	2.375	4.75	2.021	0.625	3.03	
449TDRD	20.00	18.00	0.25	22.00	0.81	8	34.78	32.99	53.83	3"	3.375	8.50	2.880	0.875	6.93	

Fig. A
364 - 449Fr.

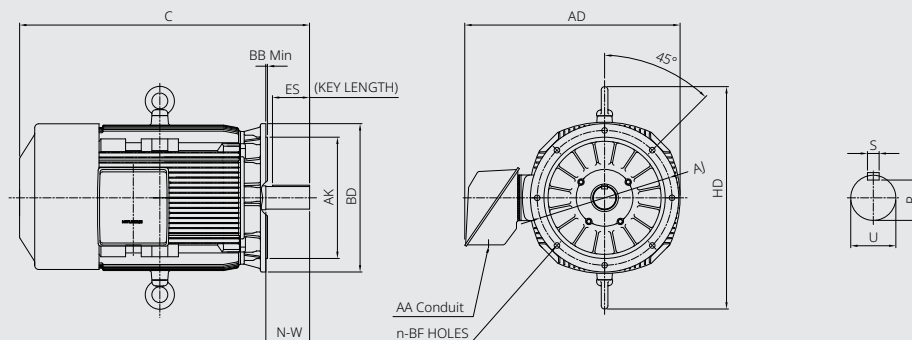

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, Vertical, C-Face, Footless



Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

Vertical, C-Face, Footless NEMA Dimensions (Fr. 143 - 326)

Frame Size	C-Face								Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
143TCRDV	5.875	4.50	0.16	0.12	6.57	3/8-16	4	0.56	10.69	8.96	13.05	3/4"	0.875	2.25	0.771	0.188	1.41	A
145TCRDV	5.875	4.50	0.16	0.12	6.57	3/8-16	4	0.56	10.69	8.96	13.05	3/4"	0.875	2.25	0.771	0.188	1.41	
182TCRDV	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	12.79	12.46	16.93	3/4"	1.125	2.75	0.986	0.250	1.78	B
184TCRDV	7.25	8.50	0.28	0.12	8.85	1/2-13	4	0.75	12.79	12.46	16.93	3/4"	1.125	2.75	0.986	0.250	1.78	
213TCRDV	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	14.56	14.13	19.69	1"	1.375	3.38	1.201	0.312	2.41	C
215TCRDV	7.25	8.50	0.25	0.25	8.81	1/2-13	4	0.75	14.56	14.13	21.17	1"	1.375	3.38	1.201	0.312	2.41	
254TCRDV	7.25	8.50	0.25	0.25	9.68	1/2-13	4	0.75	18.23	14.77	25.01	1 1/4"	1.625	4.00	1.416	0.375	2.91	C
256TCRDV	7.25	8.50	0.25	0.25	9.68	1/2-13	4	0.75	18.23	14.77	26.73	1 1/4"	1.625	4.00	1.416	0.375	2.91	
284TSCRDV	9.00	10.50	0.25	0.25	10.90	1/2-13	4	0.75	18.95	16.20	26.72	1 1/2"	1.625	3.25	1.416	0.375	1.91	C
284TCRDV	9.00	10.50	0.25	0.25	10.90	1/2-13	4	0.75	19.54	16.20	28.09	1 1/2"	1.875	4.62	1.591	0.500	3.28	
286TSCRDV	9.00	10.50	0.25	0.25	10.90	1/2-13	4	0.75	19.54	16.20	25.22	1 1/2"	1.625	3.25	1.416	0.375	1.91	C
286TCRDV	9.00	10.50	0.25	0.25	10.90	1/2-13	4	0.75	19.54	16.20	29.59	1 1/2"	1.875	4.62	1.591	0.500	3.28	
324TSCRDV	11.00	12.50	0.25	0.25	13.27	5/8-11	4	0.94	24.23	18.25	31.71	2"	1.875	3.75	1.591	0.500	2.03	C
324TCRDV	11.00	12.50	0.25	0.25	13.27	5/8-11	4	0.94	24.23	18.25	33.21	2"	2.125	5.25	1.845	0.500	3.91	
326TSCRDV	11.00	12.50	0.25	0.25	13.27	5/8-11	4	0.94	24.23	18.25	31.71	2"	1.875	3.75	1.591	0.500	2.03	C
326TCRDV	11.00	12.50	0.25	0.25	13.27	5/8-11	4	0.94	24.23	18.25	33.21	2"	2.125	5.25	1.845	0.500	3.91	

Fig. A
143 - 145Fr.

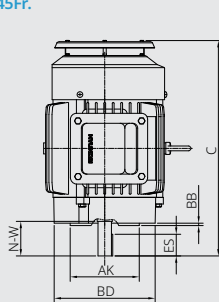


Fig. B
182 - 215Fr.








Fig. C
254 - 326Fr.



IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, Vertical, C-Face, Footless




Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

Vertical, C-Face, Footless NEMA Dimensions (Fr. 364 - 449)

Frame Size	C-Face								Overall			Conduit Box	Shaft & Keyway						Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)		
364TSCRDV	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	34.65	3"	1.875	3.75	1.591	0.500	2.03	A	
364TCRDV	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	32.15	3"	2.375	5.88	2.021	0.625	4.28		
365TSCRDV	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	35.65	3"	1.875	3.75	1.591	0.500	2.03		
365TCRDV	11.00	12.50	0.25	0.25	13.54	5/8-11	8	0.94	26.01	24.89	32.15	3"	2.375	5.88	2.021	0.625	4.28		
404TCRDV	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	42.45	3"	2.875	7.25	2.450	0.750	5.65		
405TSCRDV	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	39.45	3"	2.125	4.25	1.845	0.500	2.80		
405TCRDV	11.00	12.50	0.25	0.25	13.94	5/8-11	8	0.94	30.13	29.30	42.45	3"	2.875	7.25	2.450	0.750	5.65		
444TSCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	48.78	3"	2.375	4.75	2.021	0.625	3.03		
444TCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	44.06	3"	3.375	8.50	2.880	0.875	6.93		
445TSCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	48.78	3"	2.375	4.75	2.021	0.625	3.03		
445TCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	32.48	32.99	47.81	3"	3.375	8.50	2.880	0.875	6.93		
447TSCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	35.00	32.99	52.29	3"	2.375	4.75	2.021	0.625	3.03		
447TCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	35.00	32.99	52.57	3"	3.375	8.50	2.880	0.875	6.93		
449TSCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	35.00	32.99	57.29	3"	2.375	4.75	2.021	0.625	3.03		
449TCRDV	14.00	16.00	0.25	0.25	17.48	5/8-11	8	0.94	35.00	32.99	56.69	3"	3.375	8.50	2.880	0.875	6.93		

Fig. A
364 - 449Fr.

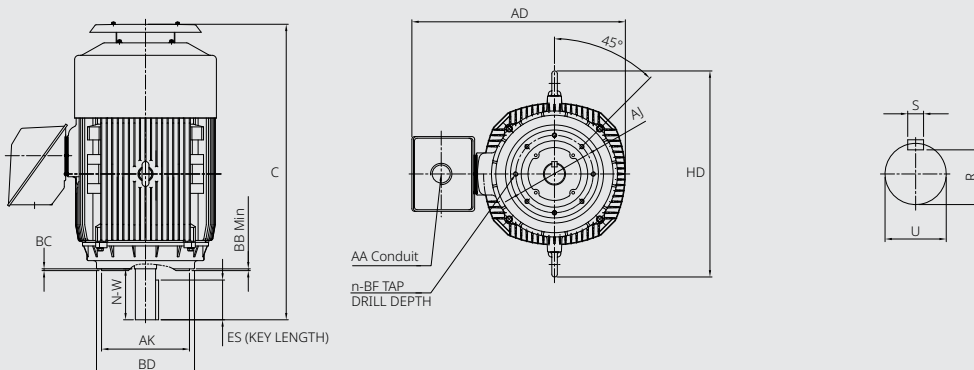

IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, Vertical, D-Flange, Footless



Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

Vertical, D-Flange, Footless NEMA Dimensions (Fr. 182 - 326)

Frame Size	D-Flange						Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
182TDRDV	10.00	9.00	0.25	11.00	0.53	4	13.42	12.46	16.93	3/4"	1.125	2.75	0.986	0.25	1.78	A
184TDRDV	10.00	9.00	0.25	11.00	0.53	4	13.42	12.46	16.93	3/4"	1.125	2.75	0.986	0.25	1.78	
213TDRDV	10.00	9.00	0.25	11.00	0.53	4	15.13	14.13	19.69	1"	1.375	3.38	1.201	0.312	2.41	
215TDRDV	10.00	9.00	0.25	11.00	0.53	4	15.13	14.13	21.17	1"	1.375	3.38	1.201	0.312	2.41	
254TDRDV	12.50	11.00	0.25	14.00	0.81	4	18.85	15.39	25.01	1 1/4"	1.625	4.00	1.416	0.375	2.91	
256TDRDV	12.50	11.00	0.25	14.00	0.81	4	18.85	15.39	26.74	1 1/4"	1.625	4.00	1.416	0.375	2.91	B
284TSDRDV	12.50	11.00	0.25	14.00	0.81	4	19.44	16.11	26.72	1 1/2"	1.625	3.25	1.416	0.375	1.91	
284TDRDV	12.50	11.00	0.25	14.00	0.81	4	19.44	16.11	28.09	1 1/2"	1.875	4.62	1.591	0.5	3.28	
286TSDRDV	12.50	11.00	0.25	14.00	0.81	4	19.44	16.11	28.22	1 1/2"	1.625	3.25	1.416	0.375	1.91	
286TDRDV	12.50	11.00	0.25	14.00	0.81	4	19.44	16.11	29.59	1 1/2"	1.875	4.62	1.591	0.5	3.28	
324TSDRDV	16.00	14.00	0.25	18.00	0.81	4	25.31	19.33	31.71	2"	1.875	3.75	1.591	0.5	2.03	
324TDRDV	16.00	14.00	0.25	18.00	0.81	4	25.31	19.33	33.21	2"	2.125	5.25	1.845	0.5	3.91	
326TSDRDV	16.00	14.00	0.25	18.00	0.81	4	25.31	19.33	31.71	2"	1.875	3.75	1.591	0.5	2.03	
326TDRDV	16.00	14.00	0.25	18.00	0.81	4	25.31	19.33	33.21	2"	2.125	5.25	1.845	0.5	3.91	

Fig. A
182 - 215Fr.


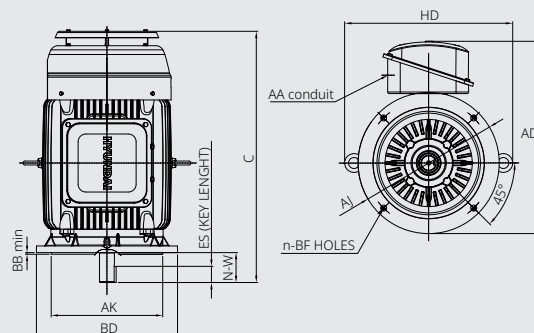


Fig. B
254 - 326Fr.



IEEE HL Model - IEEE841, Premium Efficiency Three phase, TEFC, Vertical, D-Flange, Footless

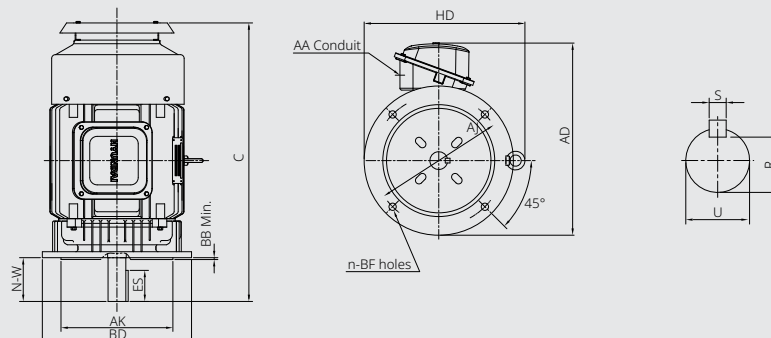


Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Protech seal

Vertical, D-Flange, Footless NEMA Dimensions (Fr. 364 - 449)

Frame Size	D-Flange						Overall			Conduit Box	Shaft & Keyway					Fig.
	AJ	AK	BB	BD	BF	n	AD (Approx.)	HD (Approx.)	C (Approx.)	AA	U	N-W	R	S	ES(Length)	
364TSDRDV	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	34.50	3"	1.875	3.75	1.591	0.5	2.03	A
364TDRDV	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	36.62	3"	2.375	5.88	2.021	0.625	4.28	
365TSDRDV	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	34.50	3"	1.875	3.75	1.591	0.5	2.03	
365TDRDV	16.00	14.00	0.25	17.99	0.81	8	26.01	24.89	36.62	3"	2.375	5.88	2.021	0.625	4.28	
404TDRDV	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	42.02	3"	2.875	7.25	2.450	0.75	5.65	
405TSDRDV	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	39.02	3"	2.125	4.25	1.845	0.5	2.8	
405TDRDV	20.00	18.00	0.25	21.65	0.81	8	30.13	29.30	42.02	3"	2.875	7.25	2.450	0.75	5.65	
444TSDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	48.78	3"	2.375	4.75	2.021	0.625	3.03	
444TDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	47.72	3"	3.375	8.50	2.880	0.875	6.93	
445TSDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	48.78	3"	2.375	4.75	2.021	0.625	3.03	
445TDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	47.72	3"	3.375	8.50	2.880	0.875	6.93	
447TSDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	52.26	3"	2.375	4.75	2.021	0.625	3.03	
447TDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	51.23	3"	3.375	8.50	2.880	0.875	6.93	
449TSDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	56.87	3"	2.375	4.75	2.021	0.625	3.03	
449TDRDV	20.00	18.00	0.25	22.00	0.81	8	32.48	32.99	56.35	3"	3.375	8.50	2.880	0.875	6.93	

Fig. A
364 - 449Fr.

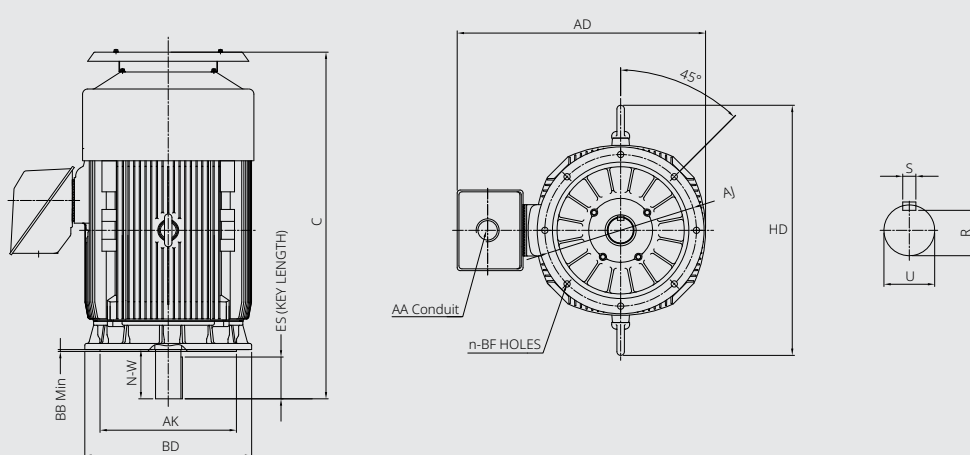

IXHHI Model - Explosion proof, Premium Efficiency Three phase, TEFC, Foot mounted



Features

- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Class I Division 1 (Fr. 143 - 449) / Class II Division 1 (Fr. 143 - 326)

Foot Mounted NEMA Dimensions

Frame Size	Mounting & Overall											AD (Approx.)	HD (Approx.)	C (Approx.)	Shaft & Keyway					Conduit Box	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	n	H				U	N-W	R	S	ES	AA	
143T	3.5	5.5	1.36	6.78	0.47	-	4	6.15	2.25	8	0.34	12.21	9.09	13.05	0.875	2.25	0.771	0.188	1.41	3/4"	A
145T	3.5	5.5	1.36	6.78	0.47	5	-	6.15	2.25	8	0.34	12.21	9.09	13.05	0.875	2.25	0.771	0.188	1.41	3/4"	
182T	4.5	7.5	1.74	8.66	0.62	4.5	-	5.52	2.75	4	0.41	14.2	10.95	15.52	1.125	2.75	0.986	0.25	1.78	3/4"	
184T	4.5	7.5	1.74	8.66	0.62	5.5	-	6.54	2.75	8	0.41	14.2	10.95	16.55	1.125	2.75	0.986	0.25	1.78	3/4"	
213T	5.25	8.5	1.52	9.85	0.6	5.5	-	6.77	3.5	4	0.41	15.78	12.65	18.86	1.375	3.38	1.201	0.312	2.41	1"	
215T	5.25	8.5	1.52	9.84	0.6	7	-	8.66	3.5	8	0.41	15.78	12.65	20.36	1.375	3.38	1.201	0.312	2.41	1"	
254T	6.25	10	1.93	11.30	0.72	8.25	-	9.56	4.25	4	0.53	18.39	14.76	23.13	1.625	4.00	1.416	0.375	2.91	1 1/4"	
256T	6.25	10	1.93	11.30	0.72	10	-	11.3	4.25	4	0.53	18.39	14.76	24.86	1.625	4.00	1.416	0.375	2.91	1 1/4"	
284TS	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	4	0.53	19.70	16.29	24.84	1.625	3.25	1.416	0.375	1.91	1 1/2"	
284T	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	4	0.53	19.70	16.29	26.21	1.875	4.62	1.591	0.5	3.28	1 1/2"	
286TS	7	11	2.20	12.60	0.78	11	-	12.68	4.75	4	0.53	19.70	16.29	26.34	1.625	3.25	1.416	0.375	1.91	1 1/2"	
286T	7	11	2.20	12.60	0.78	11	-	12.68	4.75	4	0.53	19.70	16.29	27.71	1.875	4.62	1.591	0.5	3.28	1 1/2"	
324TS	8	12.5	2.36	14.33	1.11	-	10.5	15.74	5.25	12	0.66	23.19	18.6	31.53	1.875	3.75	1.591	0.5	2.03	2"	
324T	8	12.5	2.36	14.33	1.11	-	10.5	15.74	5.25	12	0.66	23.19	18.6	33.03	2.125	5.25	1.845	0.5	3.91	2"	
326TS	8	12.5	2.36	14.33	1.11	12	-	15.74	5.25	12	0.66	23.19	18.6	31.53	1.875	3.75	1.591	0.5	2.03	2"	
326T	8	12.5	2.36	14.33	1.11	12	-	15.74	5.25	12	0.66	23.19	18.6	33.03	2.125	5.25	1.845	0.5	3.91	2"	
364TS	9	14	2.44	15.98	0.98	-	11.25	14.41	5.88	8	0.66	27.91	21.5	34.01	1.875	3.75	1.591	0.5	2.03	3"	B
364T	9	14	2.44	15.98	0.98	-	11.25	14.41	5.88	8	0.66	27.91	21.5	34.38	2.375	5.88	2.021	0.625	4.28	3"	
365TS	9	14	2.44	15.98	0.98	12.25	-	14.41	5.88	8	0.66	27.91	21.5	34.01	1.875	3.75	1.591	0.5	2.03	3"	
365T	9	14	2.44	15.98	0.98	12.25	-	14.41	5.88	8	0.66	27.91	21.5	34.38	2.375	5.88	2.021	0.625	4.28	3"	
404T	10	16	2.59	18.11	1.18	-	12.25	15.98	6.62	8	0.81	32.83	24.49	39.33	2.875	7.25	2.45	0.75	5.65	3"	
405TS	10	16	2.59	18.11	1.18	13.75	-	15.98	6.62	8	0.81	32.83	24.49	36.33	2.125	4.25	1.845	0.5	2.8	3"	
405T	10	16	2.59	18.11	1.18	13.75	-	15.98	6.62	8	0.81	32.83	24.49	39.33	2.875	7.25	2.45	0.75	5.65	3"	
444TS	11	18	2.56	20.00	1.53	-	14.5	18.81	7.5	8	0.81	35.00	27.71	41.4	2.375	4.75	2.021	0.625	3.03	3"	
444T	11	18	2.56	20.00	1.53	-	14.5	18.81	7.5	8	0.81	35.00	27.71	45.15	3.375	8.5	2.88	0.875	6.93	3"	
445TS	11	18	2.56	20.00	1.53	16.5	-	18.81	7.5	8	0.81	35.00	27.71	41.4	2.375	4.75	2.021	0.625	3.03	3"	
445T	11	18	2.56	20.00	1.53	16.5	-	18.81	7.5	8	0.81	35.00	27.71	45.15	3.375	8.5	2.88	0.875	6.93	3"	
447TS	11	18	2.56	20.00	1.53	-	20	27.28	7.5	8	0.81	35.00	27.71	50.57	2.375	4.75	2.021	0.625	3.03	3"	
447T	11	18	2.56	20.00	1.53	-	20	27.28	7.5	8	0.81	35.00	27.71	54.32	3.375	8.5	2.88	0.875	6.93	3"	
449TS	11	18	2.56	20.00	1.53	25	-	27.28	7.5	8	0.81	35.00	27.71	50.57	2.375	4.75	2.021	0.625	3.03	3"	
449T	11	18	2.56	20.00	1.53	25	-	27.28	7.5	8	0.81	35.00	27.71	54.32	3.375	8.5	2.88	0.875	6.93	3"	

Fig. A
143 - 326Fr.


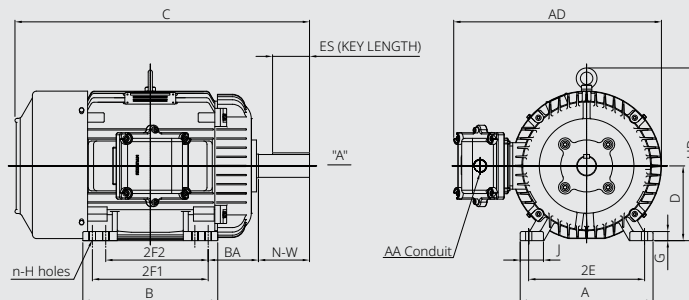



Fig. B
364 - 449Fr.

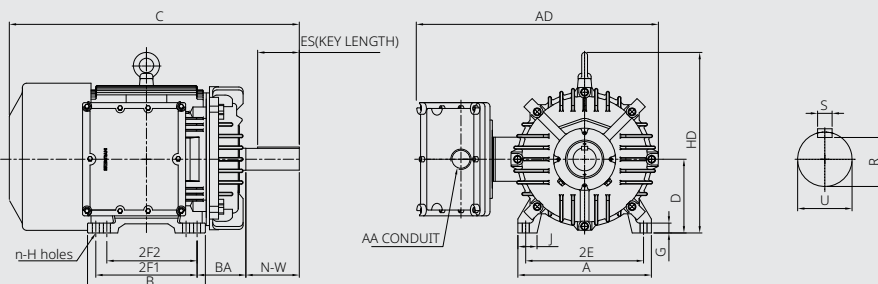

IXHHI Model -

Explosion proof, Premium Efficiency

Three phase, TEFC, C-Face, Foot mounted



Features


- Cast-iron terminal box
- Fully rotatable at 90 increments
- Main Terminal Box F1 ↔ F2 Field convertible
- Class I Division 1 (Fr. 143 - 326) / Class II Division 1 (Fr. 143 - 326)

C-Face, Foot Mounted NEMA Dimensions


Frame Size	Mounting & Overall											AD (Approx.)	HD (Approx.)	C (Approx.)	Shaft & Keyway					Conduit Box AA	Fig.
	D	2E	J	A	G	2F1	2F2	B	BA	k	H				U	N-W	R	S	ES		
143TC	3.5	5.5	1.36	6.78	0.45	-	4	6.15	2.25	8	0.34	12.36	9.09	13.05	0.875	2.25	0.771	0.188	1.41	3/4"	A
145TC	3.5	5.5	1.36	6.78	0.45	5	-	6.15	2.25	8	0.34	12.36	9.09	13.05	0.875	2.25	0.771	0.188	1.41	3/4"	
182TC	4.5	7.5	1.74	8.66	0.62	4.5	-	5.52	2.75	4	0.41	14.35	10.95	15.52	1.125	2.75	0.986	0.250	1.78	3/4"	
184TC	4.5	7.5	1.74	8.66	0.62	5.5	-	6.54	2.75	8	0.41	14.35	10.95	16.55	1.125	2.75	0.986	0.250	1.78	3/4"	
213TC	5.25	8.5	1.52	9.85	0.60	5.5	-	6.77	3.50	4	0.41	15.93	12.65	18.86	1.375	3.38	1.201	0.312	2.41	1"	
215TC	5.25	8.5	1.52	9.84	0.60	7	-	8.66	3.50	8	0.41	15.93	12.65	20.36	1.375	3.38	1.201	0.312	2.41	1"	
254TC	6.25	10	1.93	11.30	0.72	8.25	-	9.56	4.25	4	0.53	18.39	14.76	23.13	1.625	4.00	1.416	0.375	2.91	1 1/4"	
256TC	6.25	10	1.93	11.30	0.72	10	-	11.3	4.25	4	0.53	18.39	14.76	24.86	1.625	4.00	1.416	0.375	2.91	1 1/4"	
284TSC	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	4	0.53	19.70	16.29	24.65	1.625	3.25	1.416	0.375	1.91	1 1/2"	
284TC	7	11	2.20	12.60	0.78	9.5	-	11.18	4.75	4	0.53	19.70	16.29	26.02	1.875	4.62	1.591	0.500	3.28	1 1/2"	
286TSC	7	11	2.20	12.60	0.78	11	-	12.68	4.75	4	0.53	19.70	16.29	26.15	1.625	3.25	1.416	0.375	1.91	1 1/2"	
286TC	7	11	2.20	12.60	0.78	11	-	12.68	4.75	4	0.53	19.70	16.29	27.52	1.875	4.62	1.591	0.500	3.28	1 1/2"	
324TSC	8	12.5	2.44	14.33	1.11	-	10.5	13.78	5.25	12	0.66	23.19	18.6	31.53	1.875	3.75	1.591	0.500	2.03	2"	
324TC	8	12.5	2.36	14.33	1.11	-	10.5	13.78	5.25	12	0.66	23.19	18.6	33.03	2.125	5.25	1.845	0.500	3.91	2"	
326TSC	8	12.5	2.44	14.33	1.11	12	-	13.78	5.25	12	0.66	23.19	18.6	31.53	1.875	3.75	1.591	0.500	2.03	2"	
326TC	8	12.5	2.36	14.33	1.11	12	-	13.78	5.25	12	0.66	23.19	18.6	33.03	2.125	5.25	1.845	0.500	3.91	2"	

Frame Size	C-FACE								Shaft & Keyway					Fig.
	AJ	AK	BB	BC	BD	BF	n	DEPTH	U	N-W	R	S	ES(Length)	
143TC	5.875	4.50	0.16	0.12	6.50	3/8-16	4	0.56	0.875	2.25	0.771	0.188	1.41	A
145TC	5.875	4.50	0.16	0.12	6.50	3/8-16	4	0.56	0.875	2.25	0.771	0.188	1.41	
182TC	7.25	8.50	0.25	0.12	8.70	1/2-13	4	0.75	1.125	2.75	0.986	0.250	1.78	
184TC	7.25	8.50	0.25	0.12	8.70	1/2-13	4	0.75	1.125	2.75	0.986	0.250	1.78	
213TC	7.25	8.50	0.25	0.25	9.00	1/2-13	4	0.75	1.375	3.38	1.201	0.312	2.41	
215TC	7.25	8.50	0.25	0.25	9.00	1/2-13	4	0.75	1.375	3.38	1.201	0.312	2.41	
254TC	7.25	8.50	0.25	0.25	9.68	1/2-13	4	0.75	1.625	4.00	1.416	0.375	2.91	
256TC	7.25	8.50	0.25	0.25	9.68	1/2-13	4	0.75	1.625	4.00	1.416	0.375	2.91	
284TSC	9.0	10.50	0.25	0.25	10.90	1/2-13	4	0.75	1.625	3.25	1.416	0.375	1.91	
284TC	9.0	10.50	0.25	0.25	10.90	1/2-13	4	0.75	1.875	4.62	1.591	0.500	3.28	
286TSC	9.0	10.50	0.25	0.25	10.90	1/2-13	4	0.75	1.625	3.25	1.416	0.375	1.91	
286TC	9.0	10.50	0.25	0.25	10.90	1/2-13	4	0.75	1.875	4.62	1.591	0.500	3.28	
324TSC	11.0	12.50	0.25	0.25	13.27	5/8-11	4	0.94	1.875	3.75	1.591	0.500	2.03	
324TC	11.0	12.50	0.25	0.25	13.27	5/8-11	4	0.94	2.125	5.25	1.845	0.500	3.91	
326TSC	11.0	12.50	0.25	0.25	13.27	5/8-11	4	0.94	1.875	3.75	1.591	0.500	2.03	
326TC	11.0	12.50	0.25	0.25	13.27	5/8-11	4	0.94	2.125	5.25	1.845	0.500	3.91	

Fig. A
143 - 326Fr.

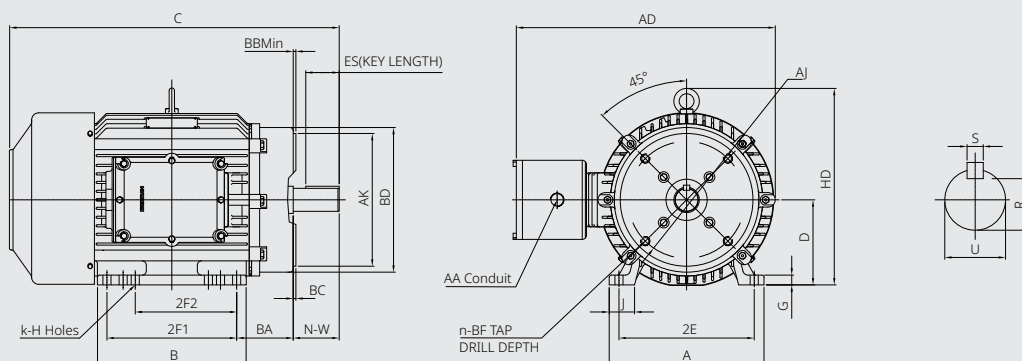

Products in Stock (Location)

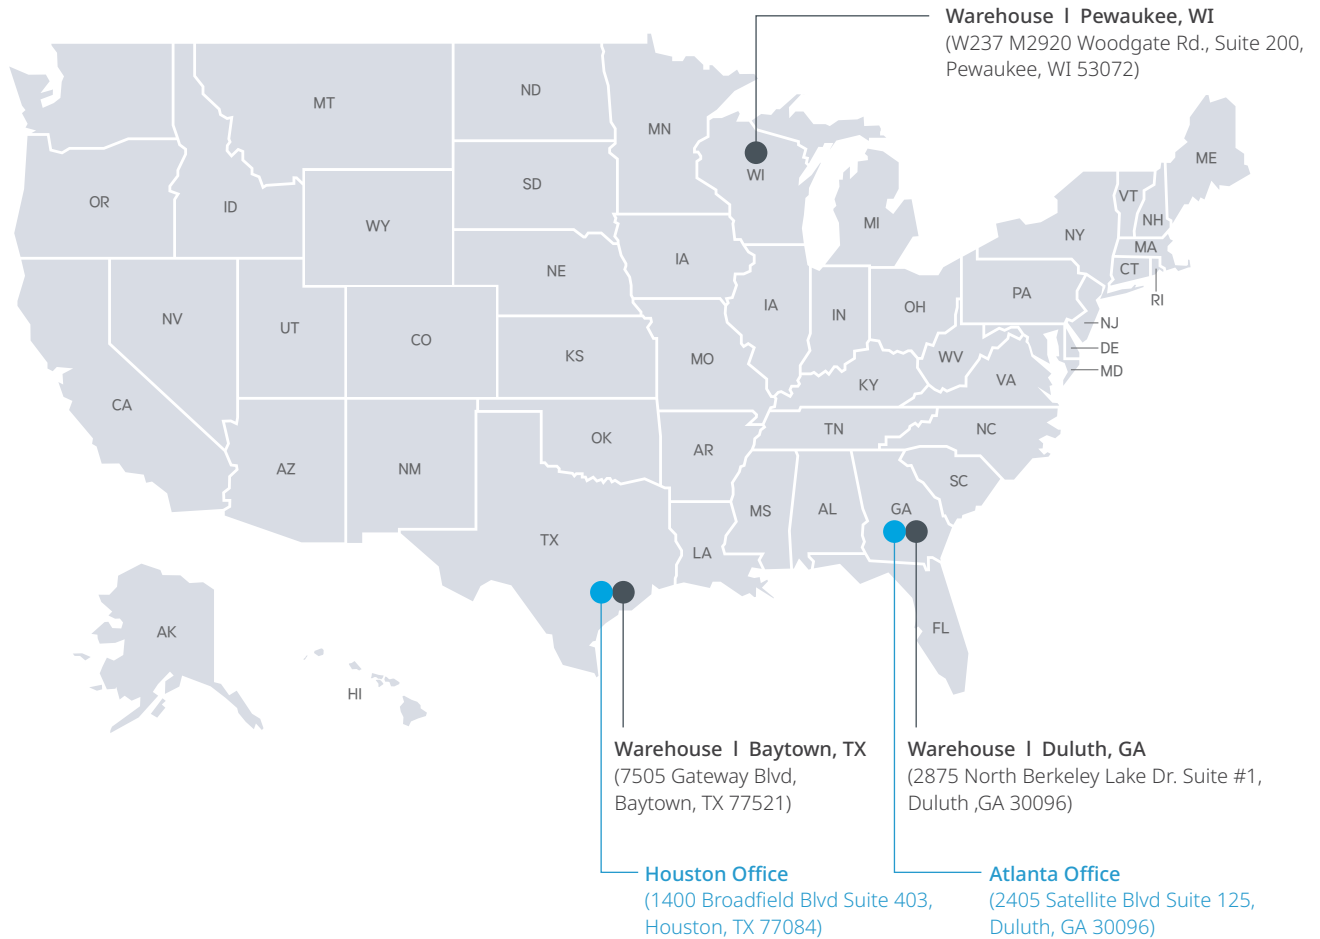

In-Stock and Ready to Ship


Our goal and value lie in holding the products our customers need in stock and swiftly responding to their demands, making them more competitive.




Warehouse in stock I Baytown, TX



Warehouse in stock I Duluth, GA

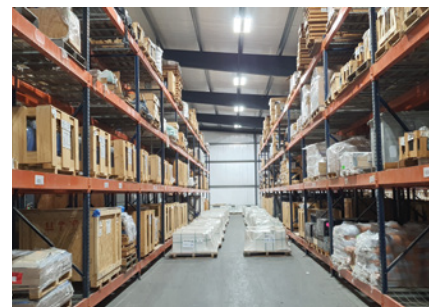

Warehouse in stock I Pewaukee, WI

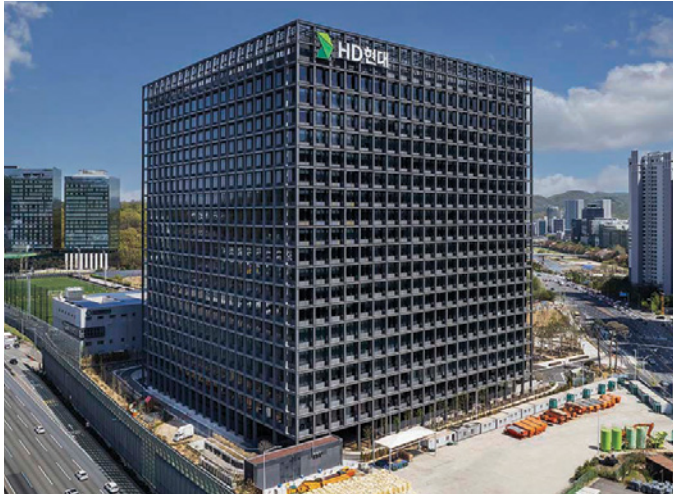

HD HYUNDAI HEADQUARTERS (South Korea)



HD HYUNDAI ELECTRIC AMERICA (Houston, U.S)



<https://www.hd-hyundaielectric.com/elect/en/index.jsp>

HD Hyundai Electric America (U.S)

(Office)

Houston	1400 Broadfield Blvd Suite 403, Houston, TX 77084	(+1) 770-654-7108	Lvmotor@heamerica.com
Atlanta	2405 Satellite Blvd Suite 125, Duluth, GA 30096	(+1) 678-789-1885	Lvmotor@heamerica.com

(Warehouse)

Baytown	7505 Gateway Blvd, Baytown, TX 77521	(+1) 770-654-7108	Lvmotor@heamerica.com
Duluth	2875 North Berkeley Lake Dr. Suite #1, Duluth, GA 30096	(+1) 770-654-7108	Lvmotor@heamerica.com
Pewaukee	W237 M2920 Woodgate Rd., Suite 200, Pewaukee, WI 53072	(+1) 770-654-7108	Lvmotor@heamerica.com

HD Hyundai Electric (South Korea)

Headquarters	477 Bundangsuseo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
Main Factory	700, Bangeojinsunhwando-ro, Dong-gu, Ulsan-si, Republic of Korea
Vietnamese Factory	Road no. 10, Nhon Trach 6 IZ, Long Tho Ward, Nhon Trach District, Dong Nai Province, Vietnam